


CVN-69 Milestone 3 Island Printing Guide

BAMBU X1C / P1S / A1 · A1 MINI PRACTICAL · 0.4 MM NOZZLE · PLA · NO PAINT REQUIRED

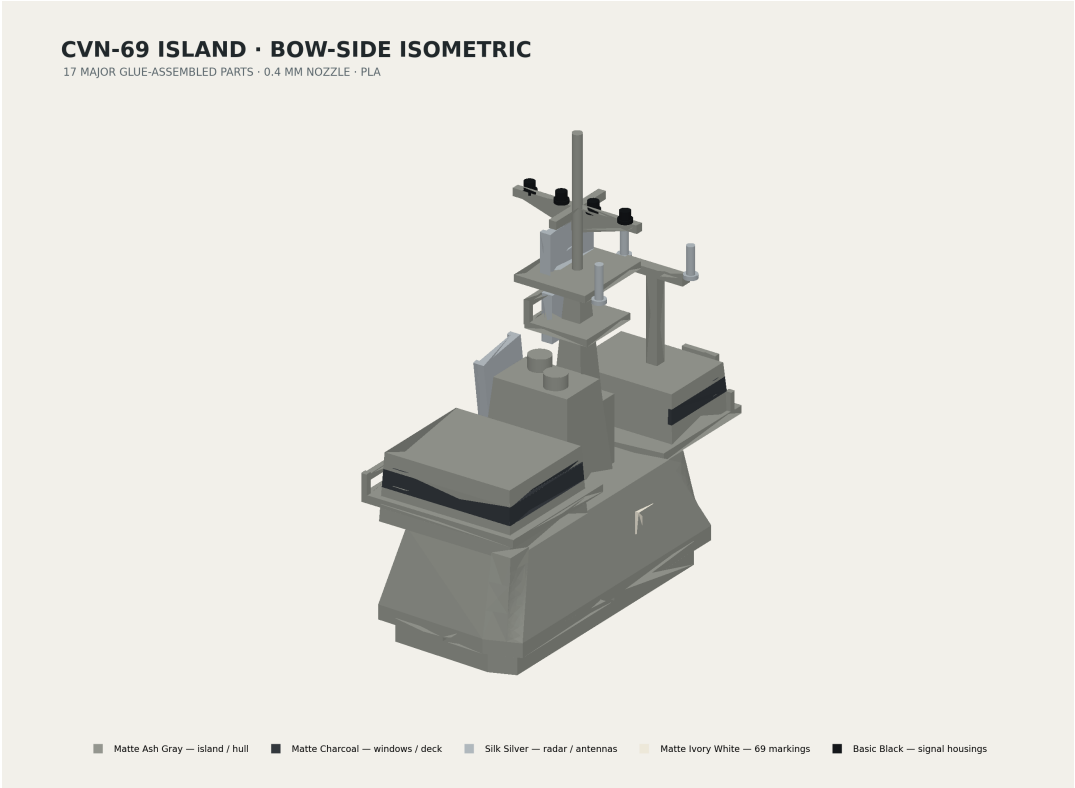

Print files


3MF	Objects
Print_Plate_01_Island_Body.3mf	foundation/lower body, navigation bridge, primary flight control, exhaust/uptake
Print_Plate_02_Mast_Radar.3mf	main and secondary masts, yardarm, SPS-48G, SPS-49-family, SPN-50
Print_Plate_03_Antennas_Details.3mf	window inserts, ladder, antennas, signal housings, port/starboard 69
Island_Interface_Test_Coupon.3mf	exact male and female production interface

Orientation and FDM rules

- Do not auto-scale. All files are millimetres at 1:700 and already rest at $z = 0$ in the documented print orientation.
- Foundation prints plug-down; the 0.90 mm hidden flange overhang is short and open. Inspect the four glue channels after brim removal.
- Masts, radar faces, markings, and ladder are rotated flat where appropriate. Keep detailed radar ribs facing upward.
- Minimum structural wall is 1.20 mm; freestanding mast elements are 0.80 mm or larger; railings and non-freestanding antennas are 0.60 mm or larger.
- Use a brim only where your bed adhesion requires it. No enclosed support traps are present.

CVN-69 ISLAND · STERN-SIDE ISOMETRIC

NO-PAINT OBJECT COLOR DESIGN · PUBLIC-REFERENCE CONFIGURATION

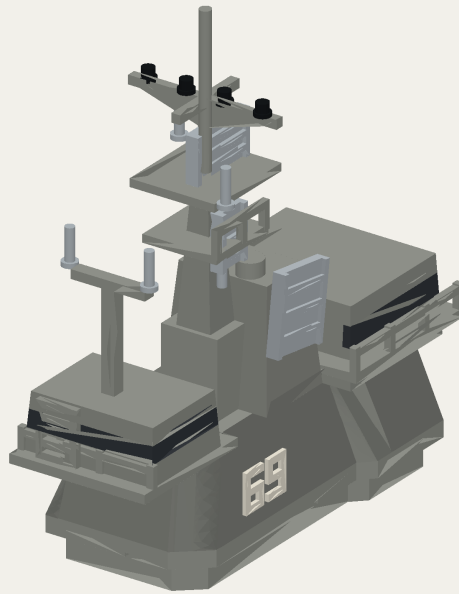


■ Matte Ash Gray — island / hull ■ Matte Charcoal — windows / deck ■ Silk Silver — radar / antennas ■ Matte Ivory White — 69 markings ■ Basic Black — signal housings

Object-based color mapping

AMS slots are not assigned. Print colors separately and glue; this avoids inefficient layer-by-layer color changes.

Object	Material
Aft_Access_Ladder	Bambu PLA Matte Ash Gray
Antenna_Detail_Set	Bambu PLA Silk Silver
Bridge_Window_Insert	Bambu PLA Matte Charcoal
Exhaust_Uptake	Bambu PLA Matte Ash Gray
Foundation_Lower_Island	Bambu PLA Matte Ash Gray
Main_Mast	Bambu PLA Matte Ash Gray
Main_Yardarm	Bambu PLA Matte Ash Gray
Marking_69_Port	Bambu PLA Matte Ivory White
Marking_69_Starboard	Bambu PLA Matte Ivory White
Navigation_Bridge	Bambu PLA Matte Ash Gray
PriFly_Window_Insert	Bambu PLA Matte Charcoal
Primary_Flight_Control	Bambu PLA Matte Ash Gray
Radar_AN_SPN50_Array	Bambu PLA Silk Silver
Radar_AN_SPS48G_Array	Bambu PLA Silk Silver
Radar_AN_SPS49_Array	Bambu PLA Silk Silver
Secondary_Mast	Bambu PLA Matte Ash Gray
Signal_Light_Housings	Bambu PLA Basic Black

Coupon and first-article acceptance

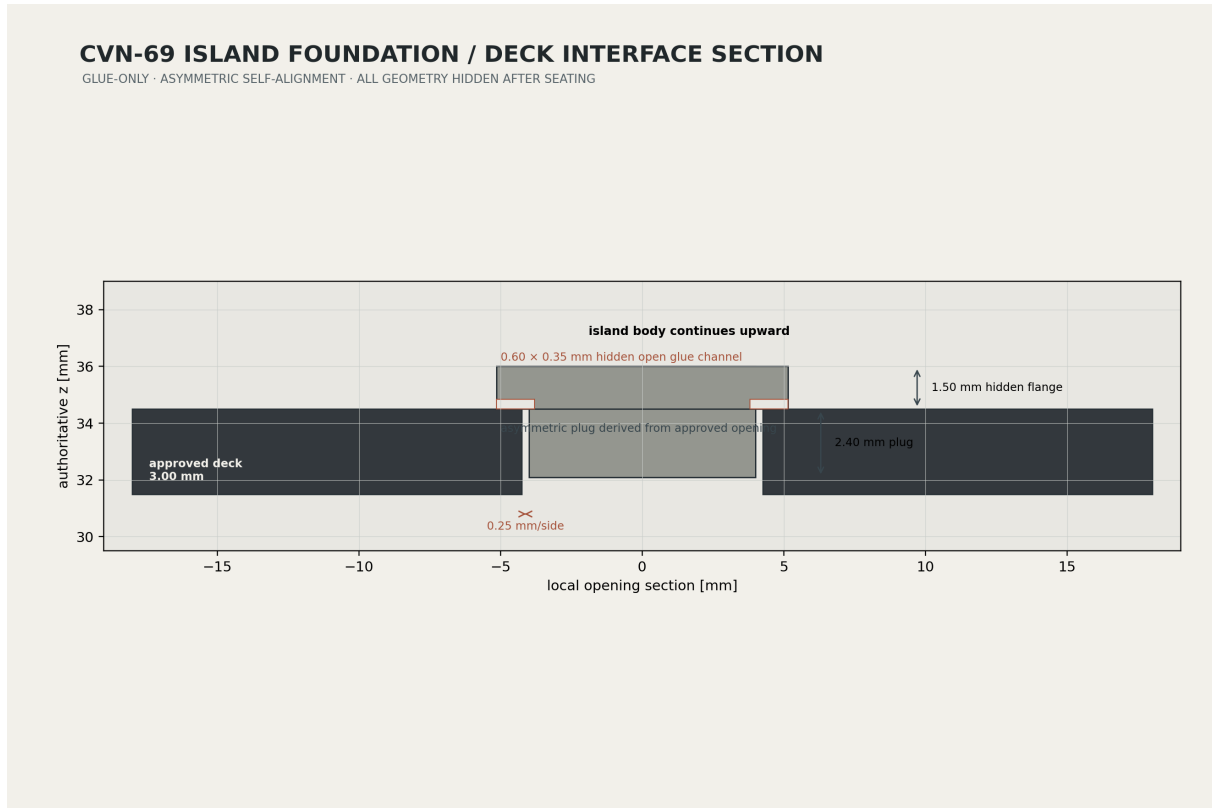

- Print the coupon with the exact production process before committing the full island.
- Pass: hand insertion, full broad-face seating, no rocking, no cracked wall, and glue does not lock the part before seating.
- Fail: force fit, visible deformation, incomplete seating, or more than 0.10 mm vertical seating error after cleanup.
- Correct printer calibration or slicer compensation; never scale the production island.

Automated validation is necessary but does not replace a physical coupon and first-article dry fit.