

PRODUCT DATASHEET




ADEPT-MICRO-E

PRODUCT DESCRIPTION

Adept-Micro-E inlays and tags are specifically engineered for the unique identification of small-sized products across various industries. Designed with precision, they deliver outstanding performance when tagging compact items, particularly in pharmaceutical and healthcare applications. These inlays ensure reliable readability on challenging small form factors such as syringes, plastic and glass vials, ampoules, and diverse packaging formats. Ideal for item-level tracking, authentication, and traceability.

PRODUCT IMAGE

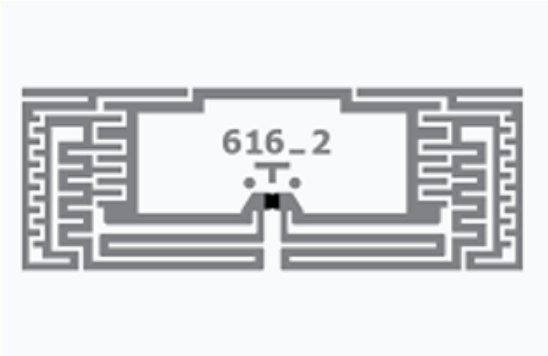

APPLICATIONS



Pharma Products





Jewellery



Cosmetics & Fashion products

TEST REPORT

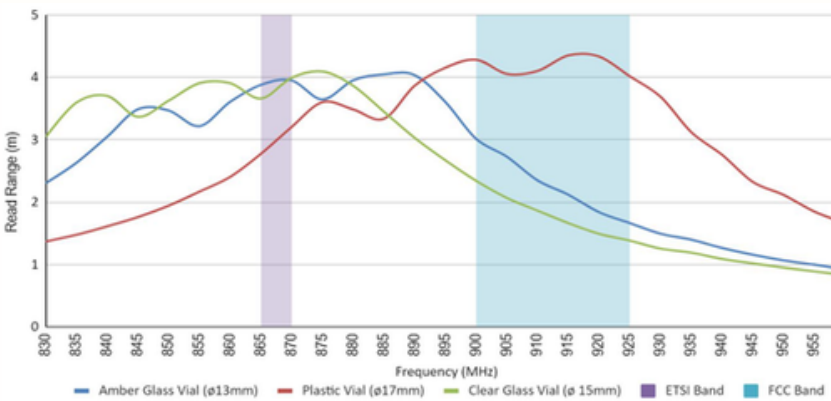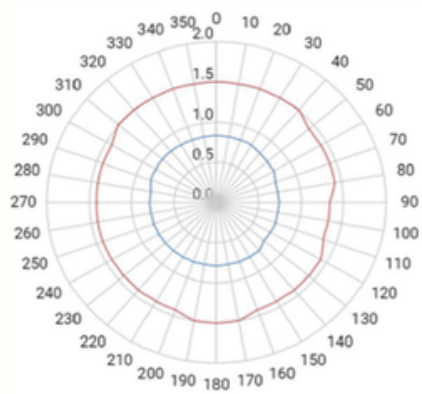

TECHNICAL DETAILS

Physical Specification		RFID Specification	
Inlay size	22 mm X 12 mm	Operating mode	Passive
Label size	26 mm X 15 mm And as required	Frequency Band	UHF 860 - 960 MHz
Adhesive	Acrylic & 3M	RF protocol	ISO/IEC 18000-63 C
Delivery format	Reel	IC	Impinj M830/NXP Ucode 9
No. of labels/Reel	2,00 pcs/reel	EPC memory	128-bit
Core Inner diameter	55 mm / 3 in	TID memory	96-bit / 48-bit
Available Face Material	PET	User memory	NO
Environmental Specification		Web Width	55 mm / 3 in and customizable
Operating temperature	-40 °C to 85 °C -40 °F to 185 °F	Access password	32 bit
Relative humidity	5-95% non condensing	Kill password	32 bit
UV resistant	Yes	Write cycle endurance	200000
Personalization Options		Read range	up to 2-3 metres
Encoding	Yes	Tamper proof	No
Customized printing	Yes	RoHs	Yes
Coloured printing	Yes	ARC Certificate	No