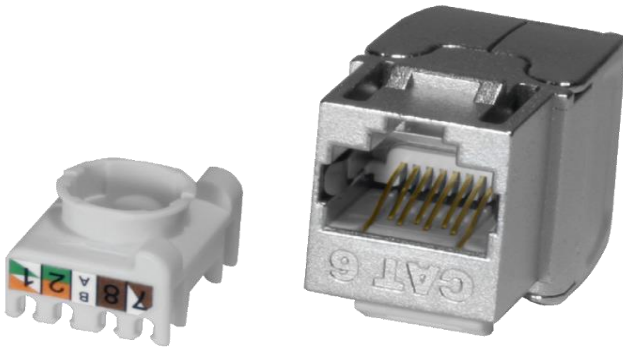# Cat.6 FTP 180° Toolless - Keystone Jack

CAT 6 FTP Shielded Toolless Keystone Jack is designed to comply with International Class E channel specifications. Toolless design, no punchdown tool required. Performs better than CAT 6 component performance (ANSI/TIA-568-C.2 Category 6).

Features

EMI/RFI protection
Zinc-Alloy Housing
Front Connection Spring Wire: Phosphor Bronze Alloy. Plated with 50 micro-inch of Gold over 70-100 micro-inch of Nickel
IDC Material: Phosphor Bronze Alloy with 10 micro-inch 100% Tin Alloy
Can accommodate 22-26AWG wires(Solid or stranded)
T568A/B wiring

Applications

Voice
Fast Ethernet (IEEE802.3)
100Vg-AnyLAN (IEEE 802.12)
Token Ring (IEEE 802.5)
TP-PMD (ANSI X3T9.5)
100Base-T Ethernet (IEEE 802.3u)
155/622 Mbps 1.2/ 2.4 Gbps ATM
1000Base-T Ethernet
550 MHz Broadband video

Standards

UL 1863 Safety listed
UL 94V-0 flammability
ANSI/TIA Standard 568-2.D
ISO/IEC 11801 2. Ed.
CENELEC EN 50173

Available Colours

1916-12020 - Metallic Grey