


Cat.6 FTP 180° Toolless - Keystone Jack

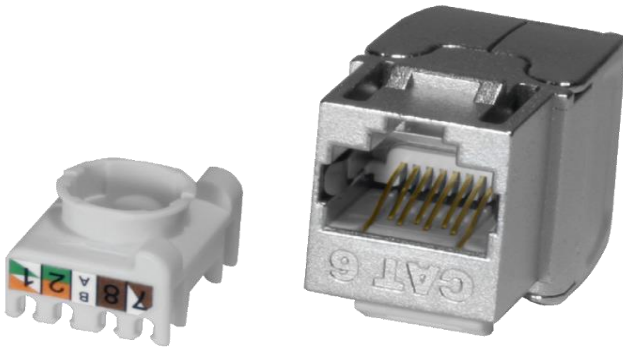

CAT 6 FTP Shielded Toolless Keystone Jack is designed to comply with International Class E channel specifications.

Toolless design, no punchdown tool required.

Performs better than CAT 6 component performance (ANSI/TIA-568-C.2 Category 6).

Features

EMI/RFI protection

Zinc-Alloy Housing

Front Connection Spring Wire: Phosphor Bronze Alloy. Plated with 50 micro-inch of Gold over 70-100 micro-inch of Nickel

IDC Material: Phosphor Bronze Alloy with 10 micro-inch 100% Tin Alloy

Can accommodate 22-26AWG wires(Solid or stranded)

T568A/B wiring

Applications

Voice

Fast Ethernet (IEEE802.3)

100Vg-AnyLAN (IEEE 802.12)

Token Ring (IEEE 802.5)

TP-PMD (ANSI X3T9.5)

100Base-T Ethernet (IEEE 802.3u)

155/622 Mbps 1.2/ 2.4 Gbps ATM

1000Base-T Ethernet

550 MHz Broadband video

Standards

UL 1863 Safety listed

UL 94V-0 flammability

ANSI/TIA Standard 568-2.D

ISO/IEC 11801 2. Ed.

CENELEC EN 50173

Available Colours

1916-12020 - Metallic Grey

