


Cat.6 UTP 180° Quick Solution w/ Dust Cover - Keystone Jack

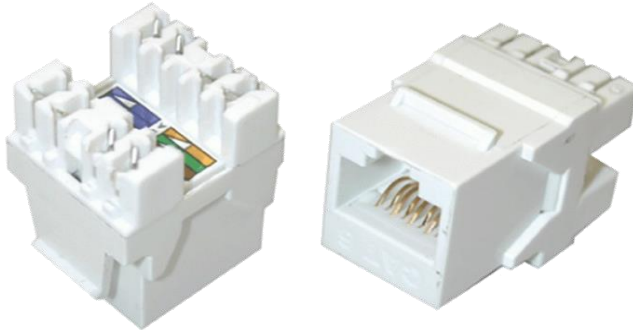

CAT 6 UTP 180° Keystone Jack is designed with easy installation in mind and compatible with CAT 6 component performance (ANSI/TIA-568-C.2 Category 6).

Compatible with SYSThames One Punch Tool which can reduce jack termination time and save time up to 8 times compared to traditional termination.

Features

- Front Connection Spring Wire: Phosphor Bronze Alloy. Plated with 50 micro-inch of Gold over 70-100 micro-inch of Nickel
- IDC Material: Phosphor Bronze Alloy with 10 micro-inch 100% Tin Alloy
- Can terminate stranded or solid 22~24AWG wires.
- T568A/B wiring

Applications

Voice; T1; ISDN
10GBASE-T
16Mbps Token Ring (IEEE802.5)
100VG-AnyLAN (IEEE802.12)
100BASE-T Ethernet (IEEE802.3)
155/622Mbps 1.2/2.4 Gbps ATM
1000Mbps Gigabit Ethernet
550MHz Broadband Video

Standards

UL 1863 Safety listed
UL 94V-0 Fire Retardant Plastic
ANSI/TIA Standard 568-2.D
ISO/IEC 11801 2. Ed.
CENELEC EN 50173

Available Colours

1616- 12011 - White
1616- 22011 - Blue
1616- 32011 - Yellow

