


Cat.6 UTP 180° Quick Solution /w Shutter - Keystone Jack

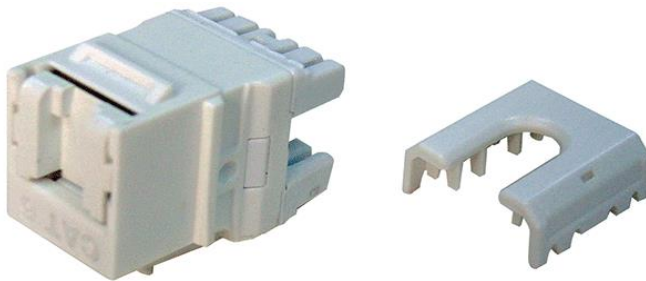

CAT 6 UTP 180° Keystone Jack is designed with easy installation in mind and compatible with CAT 6 component performance (ANSI/TIA-568-C.2 Category 6).

Compatible with SYSThames One Punch Tool which can reduce jack termination time and save time up to 8 times compared to traditional termination.

Features

Front Connection Spring Wire: Phosphor Bronze Alloy. Plated with 50 micro-inch of Gold over 70-100 micro-inch of Nickel
 IDC Material: Phosphor Bronze Alloy with 10 micro-inch 100% Tin Alloy
 Can terminate stranded or solid 22~24AWG wires.
 T568A/B wiring

Applications

Voice; T1; ISDN
 10GBASE-T
 16Mbps Token Ring (IEEE802.5)
 100VG-AnyLAN (IEEE802.12)
 100BASE-T Ethernet (IEEE802.3)
 155/622Mbps 1.2/2.4 Gbps ATM
 1000Mbps Gigabit Ethernet
 550MHz Broadband Video

Standards

UL 1863 Safety listed
 UL 94V-0 Fire Retardant Plastic
 ANSI/TIA Standard 568-2.D
 ISO/IEC 11801 2. Ed.
 CENELEC EN 50173

Available Colours

1716-12012 - White
 1716-22012- Blue
 1716-32012- Yellow

