

LN Series Linear Motor

● General information


- Iron core technology
- Low cogging
- Integrated with hall sensor
- High force, reliable and long life






● Specification

Specification	Unit	LN56S130MXXX	LN67S076MXXX	LN92S068MXXX	LN92S184MXXX	LN92S260MXXX
Peak Force	N	388	150	388	1080	1555
Continuous Force	N	129	50	129	360	518
Peak Current	A	9	4.2	9	15	15
Rated Current	A	3	1.4	3	5	5
Push Constant	N/Arms	43	35.7	43	72	103.6
Volatge Constant	Vpk/m/s	35.1	27.5	35.1	58.8	84.6
Max.Speed	m/s	4	4	4	4	4
Inductance(L-L)	mH	10.2	18	10.2	20.8	20.4
Resistance(L-L)	Ohms	2.2	10	2.1	2.6	4.3
Pole Distance	mm	32	18	32	36	32
Stator Assembly Weight	g	986	670	1228	2110	3945
Magnet Assembly Weight	g/mm	3.39	4.32	6.7	6.66	6.79
Magnet Assembly Length(L)	mm	80/160/320	108/180/360	80/160/320	90/180/360	80/160/320
Magnet Assembly Width(W)	mm	56	67	92	92	92
Motor Height(H)	mm	39	31	41	41	41

● Implication For Name

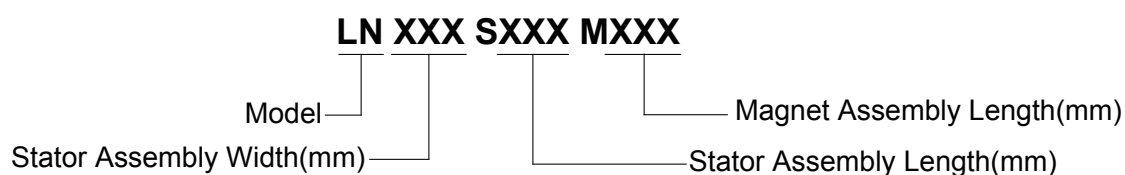

- *Mechanical*

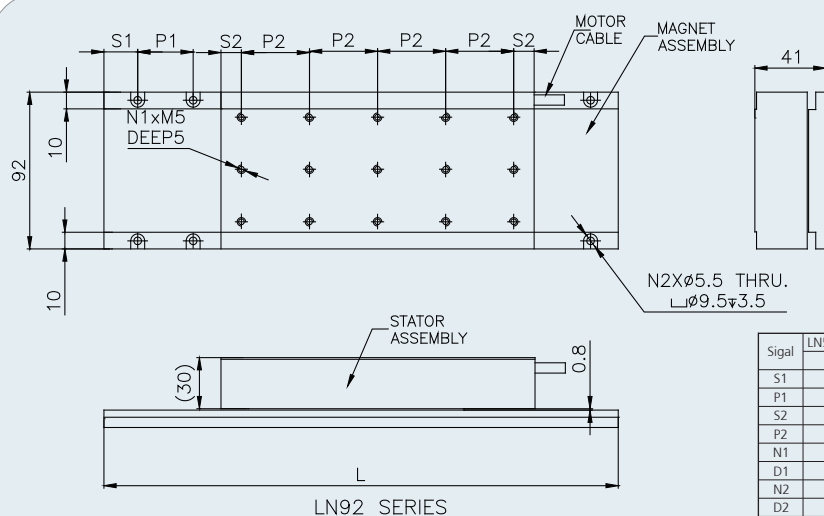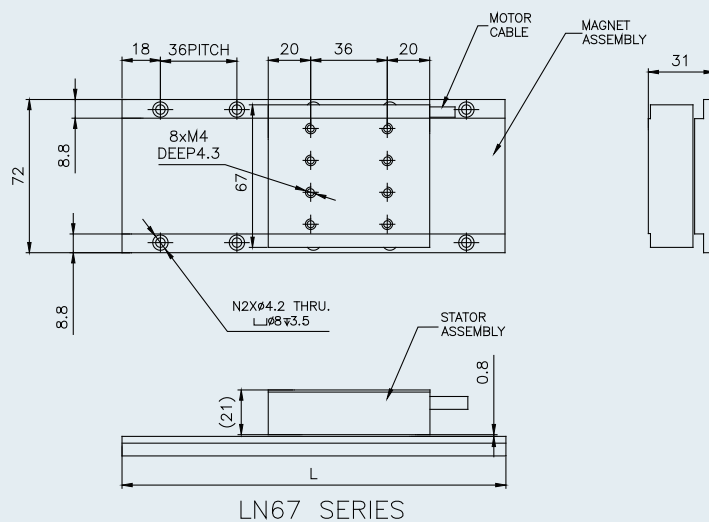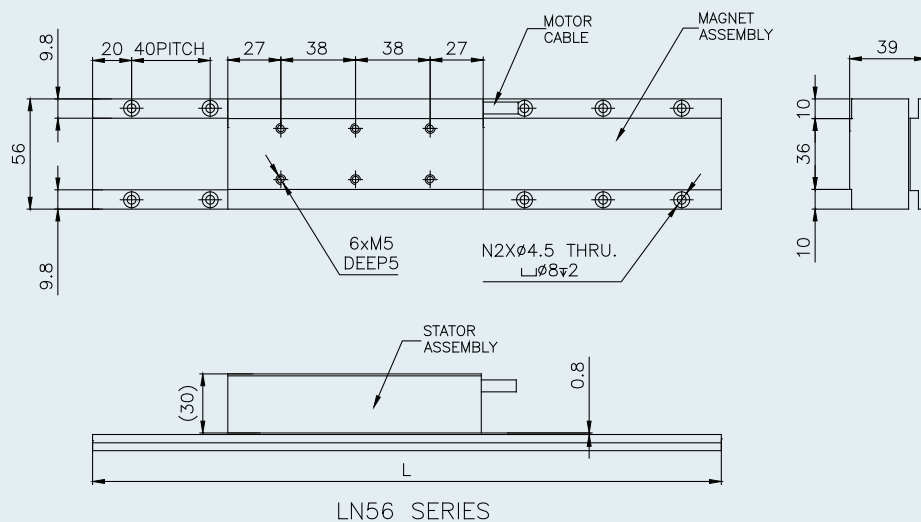

Sigal	LN56S130MXXX	LN67S076MXXX	LN92S068MXXX	LN92S184MXXX	LN92S260MXXX
	Size(mm)	Size(mm)	Size(mm)	Size(mm)	Size(mm)
S1	/	/	20	30	20
P1	/	/	40	60	40
S2	/	/	15	12	16
P2	/	/	38	40	38
N1	/	/	6	15	21
D1	/	/	/	/	/
N2	4/8/16	3/5/10	4/8/16	2/3/6	4/8/16
D2	/	/	/	/	/

EFS Series Linear Motor



● General information

- Peak push force: 37.5-2160N
- Rated push force: 12.5-720N
- Maximum speed: 4m/s
- Efficient travel: 50-6000mm
- Applied to Automatic Control System, Semiconductor Industry, Medical Industry and so on.

● Specification

Specification	Unit	ESFS05-8	ESFS07-7	ESFS13-4	ESFS18-7	ESFS26-7
Peak Push Force	N	150	388	388	1080	1555
Continuous Push Force	N	50	129	129	360	518
Peak Current	A	4.2	9	9	15	15
Rated Current	A	1.4	3	3	5	5
Push Constant	N/Arms	35.7	43	43	72	103.6
Volatge Constant	Vpk/m/s	27.5	35.1	35.1	58.8	84.6
Max.Speed	m/s	4	4	4	4	4
Encoder Resolution	um	0.1-5	0.1-5	0.1-5	0.1-5	0.1-5
Inductance(L-L)	mH	18	10.2	10.2	20.8	20.4
Resistance(L-L)	Ohms	10	2.1	2.2	2.6	4.3
Pole Distance	mm	18	32	32	36	32
Stator Assembly Size(L1*W*H)	mm	76*67*21	68*92*30	130*56*30	184*92*30	260*92*30
Stator Assembly Weight	g	670	1228	986	2110	3945
Magnet Assembly Weight	g/mm	4.32	6.7	3.39	6.66	6.79
Magnet Assembly Length(L)	mm	108/180/360	80/160/320	80/160/320	90/180/360	80/160/320
Magnet Assembly Width(W)	mm	67	92	56	92	92
Motor Height(H)	mm	31	41	39	41	41

● Mechanical

