


PL080GE800K Planetary Gearbox

● General Information

- Ring material: Metal
- Max. Backlash at no-load: $\leq 2.5^\circ$
- Radial play of shaft: $\leq 0.08\text{mm}$
- Axial play of shaft: $\leq 0.4\text{mm}$
- Permissible Load Range: 8.0Nm~80.0Nm

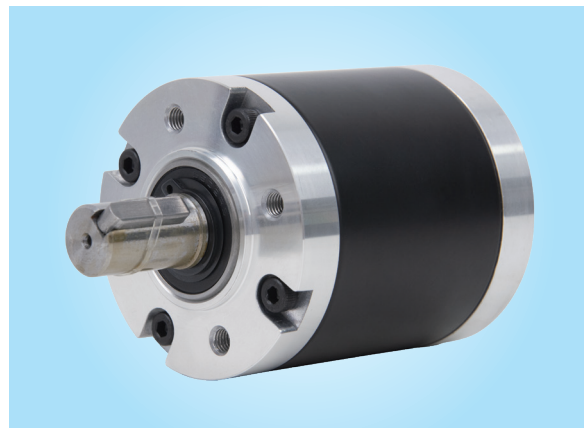

● Specification

	Unit	PL080GE800K-1S	PL080GE800K-2S	PL080GE800K-3S	PL080GE800K-4S
Frame size	mm	$\phi 80$	$\phi 80$	$\phi 80$	$\phi 80$
Reduction ratio		1/3.55, 1/5.31 1/6.6	1/13, 1/19, 1/23	1/26, 1/30, 1/37	1/50, 1/74, 1/92 1/111, 1/38
Efficiency	%	90	81	73	66
Number of stages		1	2	3	4
Rated Continuous torque	Nm	8	30	60	80
Max. Momentary torque	Nm	12	45	90	120
Max. Radial load(10mm from flange)	N	600	600	600	600
Max. Axial load	N	200	200	200	200
Max. Shaft press fit force	N	1000	1000	1000	1000
Gearbox Length	mm	55.7	72.2	72.2	88.5
Weight	g	1100	1500	1500	1880
Max. Backlash at no-load	$^\circ$	2.5	2.5	2.5	2.5
Operating Temperature	$^\circ\text{C}$	-15 ~ +80			
Recommend input speed	rpm	<4000			

● Mechanical

