


PLG SERIES PRECISION PLANETARY REDUCER

● General information

- Higher accuracy, Higher loading ability
- Helical gear design, Lower backlash
- Wide tooth surface and high strength
- Integrated connection board design, With various servo and motor

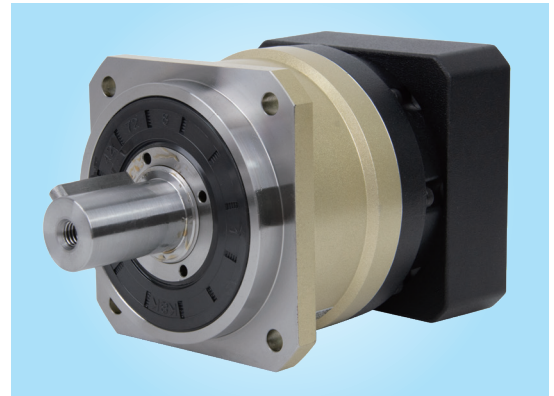


● Specification

Product Model	Unit	Ratio	Series	PLG-060	PLG-090	PLG-115
Rated output torque	Nm	3	1 Stage	44	130	208
		4		40	140	290
		5		40	160	330
		6		44	140	300
		7		40	140	300
		8		36	120	260
		9		32	100	230
		10		32	100	230
		15	2 Stage	44	130	208
		16		40	140	290
		20		40	140	290
		25		48	160	330
		30		40	130	300
		35		40	140	300
		40		40	140	300
		50		44	160	330
		70	40	120	300	
		100	32	100	230	
Maximum torque	Nm	2 Times rated output torque				
Maximum radial force	N			930	2350	5100
Maximum axial force	N			860	1700	3900
Rated input speed	RPM			≤ 3000		
Maximum input speed	RPM			≤ 6000		
Operating temperature	℃			-10 ~ +90		
Backlash	Arcmin		1	≤ 3		
			2	≤ 5		
Work efficiency	%		1	95		
			2	90		
Weight	kg		1	1.3	3.9	8.4
			2	1.8	4.6	9.3
Length	mm		1	122.5	152.5	205.5
			2	151	188.5	220.5


PLG SERIES PRECISION PLANETARY REDUCER

Mechanical

PLG60

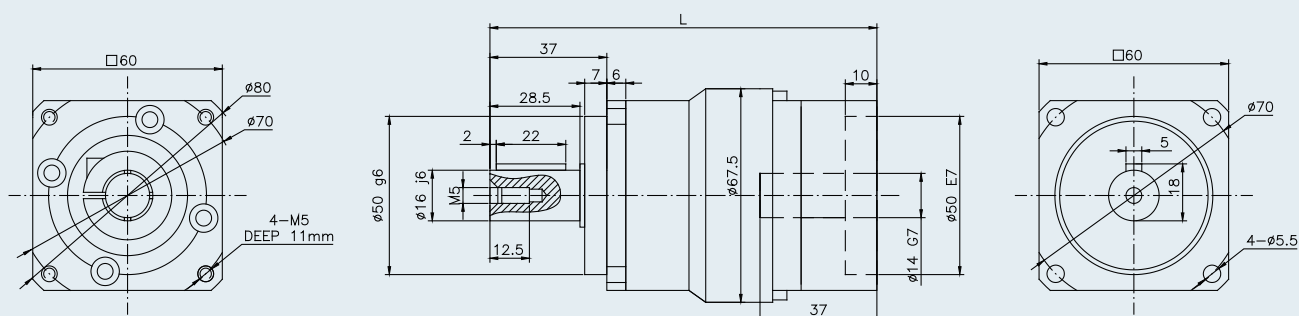

PLG90

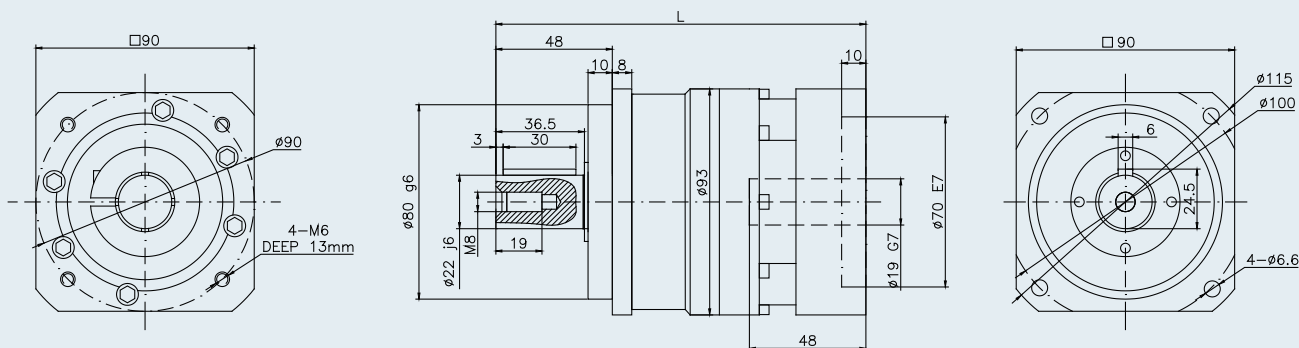

PLG115

