


Configuration de Squid dans Pfsense


1) Installation des paquets Squid

Dans Pfsense, System > Package manager > Available package

Dans cet onglet on recherche Squid et on l'installe

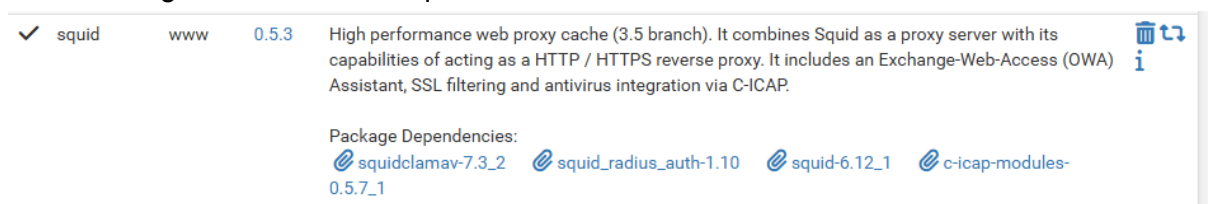

2) Configuration pour bloquer du http

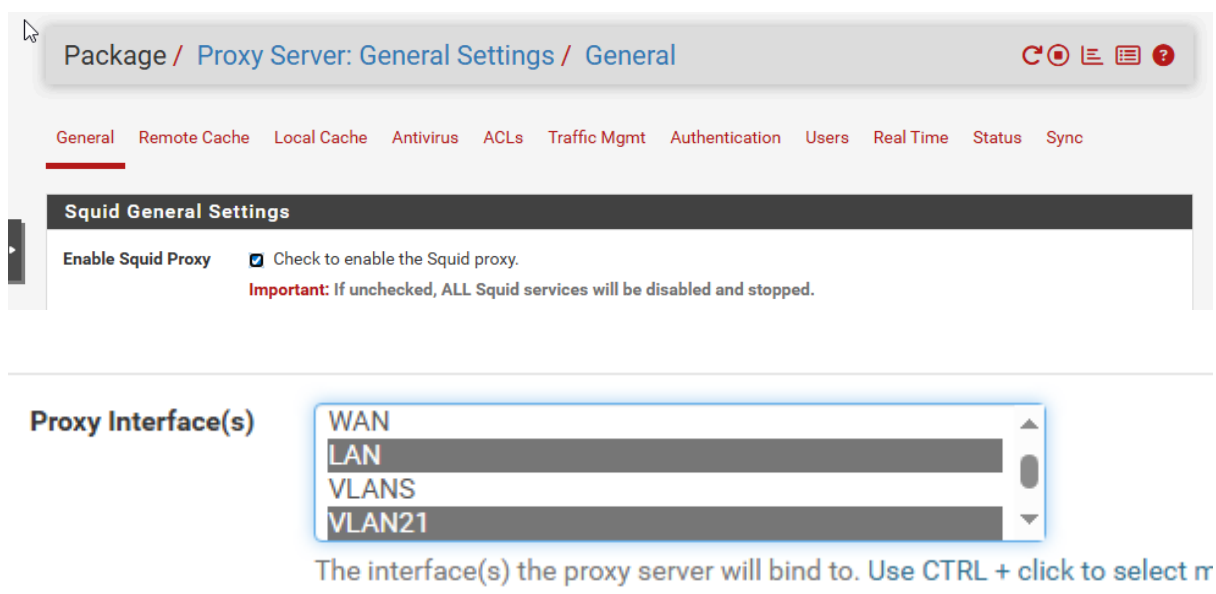

Transparent Proxy Settings

Transparent HTTP Proxy ☒ Enable transparent mode to forward all requests for destination port 80 to the proxy server.

Transparent proxy mode works without any additional configuration being necessary on clients.

Important: Transparent mode will filter SSL (port 443) if you enable 'HTTPS/SSL Interception' below.

Hint: In order to proxy both HTTP and HTTPS protocols **without intercepting SSL connections**, configure WPAD/PAC options on your DNS/DHCP servers.

Transparent Proxy Interface(s)

WAN
 LAN
 VLANs
 VLAN21

The interface(s) the proxy server will transparently intercept requests on. Use CTRL + click to select multiple interfaces.

Package / Proxy Server: Access Control / ACLs

General Remote Cache Local Cache Antivirus **ACLs** Traffic Mgmt Authentication Users Real Time Status Sync

Squid Access Control Lists

Allowed Subnets

192.168.1.0/24
 192.168.21.0/24
 192.168.22.0/24

On autorise nos réseaux sinon ça bloque tout.

Blacklist

.facebook.com
 facebook.com
 fb.com
 neverssl.com
 http://neverssl.com

Destination domains that will be blocked for the users that are allowed to use the proxy.
 Put each entry on a separate line. You can also use regular expressions.

Et on banni les sites que l'on souhaite ici.

Ensuite, il faut configurer des règles NAT une pour chaque interfaces dans laquelle on veut qu'il y est le proxy.

Firewall / NAT / Port Forward / Edit

Edit Redirect Entry

Disabled
☐ Disable this rule

No RDR (NOT)
☐ Disable redirection for traffic matching this rule
This option is rarely needed. Don't use this without thorough knowledge of the implications.

Interface

LAN

Choose which interface this rule applies to. In most cases "WAN" is specified.

Address Family

IPv4

Select the Internet Protocol version this rule applies to.

Protocol

TCP

Choose which protocol this rule should match. In most cases "TCP" is specified.

Destination
☐ Invert match.

LAN subnets

Type

Address/mask

Destination port range

HTTP

From port

Custom

HTTP

To port

Custom

Specify the port or port range for the destination of the packet for this mapping. The 'to' field may be left empty if only mapping a single port.

Redirect target IP

Address or Alias

Type

127.0.0.1

Address

Enter the internal IP address of the server on which to map the ports. e.g.: 192.168.1.12 for IPv4
In case of IPv6 addresses, it must be from the same "scope", i.e. it is not possible to redirect from link-local addresses scope (fe80:*) to local scope (::1)

Redirect target port

Other

Port

3128

Custom

Specify the port on the machine with the IP address entered above. In case of a port range, specify the beginning port of the range (the end port will be calculated automatically).
This is usually identical to the "From port" above.

Description

redirection SQUID

Description

A description may be entered here for administrative reference (not parsed).

3) Configuration pour bloquer du https

Créer un Certificat d'autorité.

System > certificates > authorities

Squid bump
✓
self-signed
0

CN=internal-ca
Valid From: Wed, 19 Nov 2025 10:00:21 +0000
Valid Until: Sat, 17 Nov 2035 10:00:21 +0000

Squid (1)

On exporte ensuite le fichier .crt sur la machine, on double clique sur le fichier pour l'installer.

Installer le certificat

local machine

Place all certificates in the following store

Trusted Root Certification Authorities

Dans les config ACL pour éviter que pfsense sois bloquer :

```
acl firewall dst <IP_LAN_du_pfSense>
```

```
ssl_bump splice firewall
```

On retourne ensuite dans

Services > Squid Proxy Server > General

et on active :

Enable SSL filtering

Il ne reste plus qu'à tester si les sites sont bloqués.