

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concert, & that no right is granted to disclose or to use any information in this document.


# CUSTOMER DRAWING


| REVISIONS | | | | |
|---|---|---|---|---|
| SYM | ECN | DESCRIPTION | DATE | APPROVED |
| 1 | HK14XXX | NEW RELEASE | 2024/10/30 | Michael.Qin |
| | | | | |

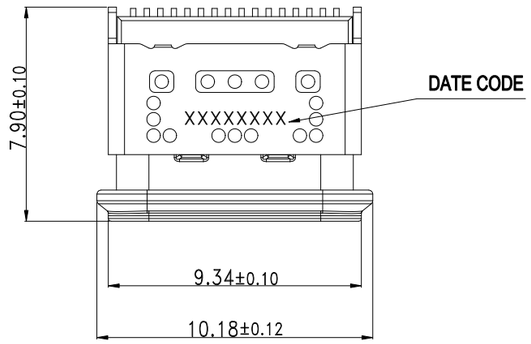


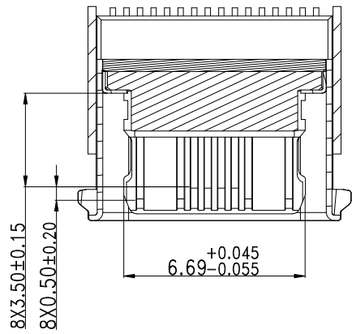



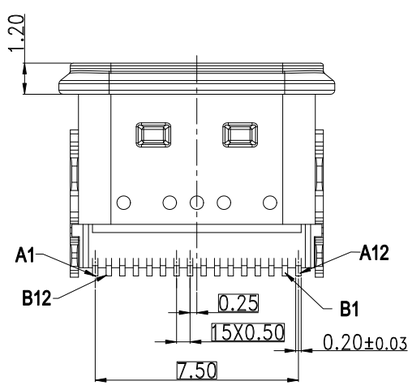

SECTION A−A(SCALE 1:1)



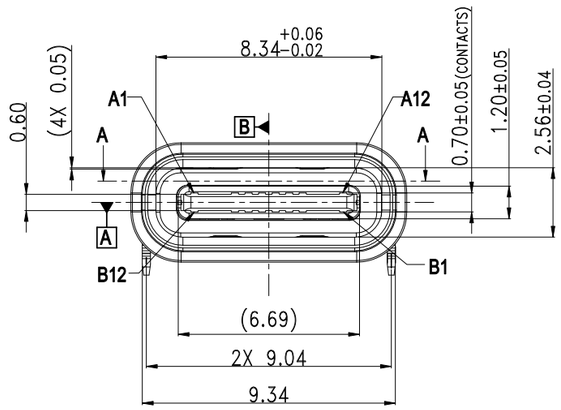

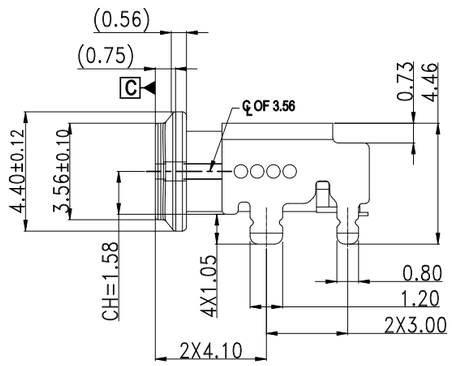
Pin Assignments:
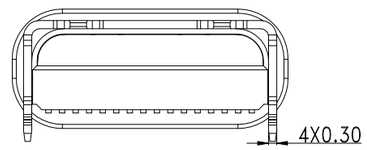
| A1 | | | A4 | A5 | A6 | A7 | A8 | A9 | | | A12 |
|---|---|---|---|---|---|---|---|---|---|---|---|
| GND | | | Vbus | CC1 | D+ | D− | SBU1 | Vbus | | | GND |
| GND | | | Vbus | SBU2 | D− | D+ | CC1 | Vbus | | | GND |
| B12 | | | B9 | B8 | B7 | B6 | B5 | B4 | | | B1 |

| | |
|---|---|
| HF(无卤) | √ |
| Non-HF(有卤) | |

UNLESS OTHERWISE SPECIFIED
TOLERANCES

| | U.S. | METRIC |
|---|---|---|
| .X | +/− | 0.50 |
| .XX | +/− | 0.25 |
| .XXX | +/− | 0.10 |
| FRACTIONS | +/− | |
| ANGLES | +/− | 3° |

FOR MATERIALS AND FINISHES SEE NOTES
REMOVE SHARP EDGES
DIMENSIONS

| U.S. | INCHES |
|---|---|
| (METRIC) | (MM) |

| APPROVAL | | DATE |
|---|---|---|
| DRAWN | Fei.Wu | 10/30/24' |
| CHECKED | Michael.Qin | 10/30/24' |
| CHECKED | Michael.Qin | |

DRAWING FILE : R:\DC\Engineering data\PLM
ANGLE OF PROJECTION

Amphenol
Amphenol East Asia Limited


TITLE
USBC 2.0 16P SCK R-SMT CH=1.58 AU30 IPX8

| SIZE | DRAWING NO. | REV. |
|---|---|---|
| A3 | 12402484XX12A | 1 |
| SCALE | NONE | SHEET 1 OF 3 |

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concert, & that no right is granted to disclose or to use any information in this document.

# CUSTOMER DRAWING


| REVISIONS | | | | |
|---|---|---|---|---|
| SYM | ECN | DESCRIPTION | DATE | APPROVED |
| See page 1 | | | | |

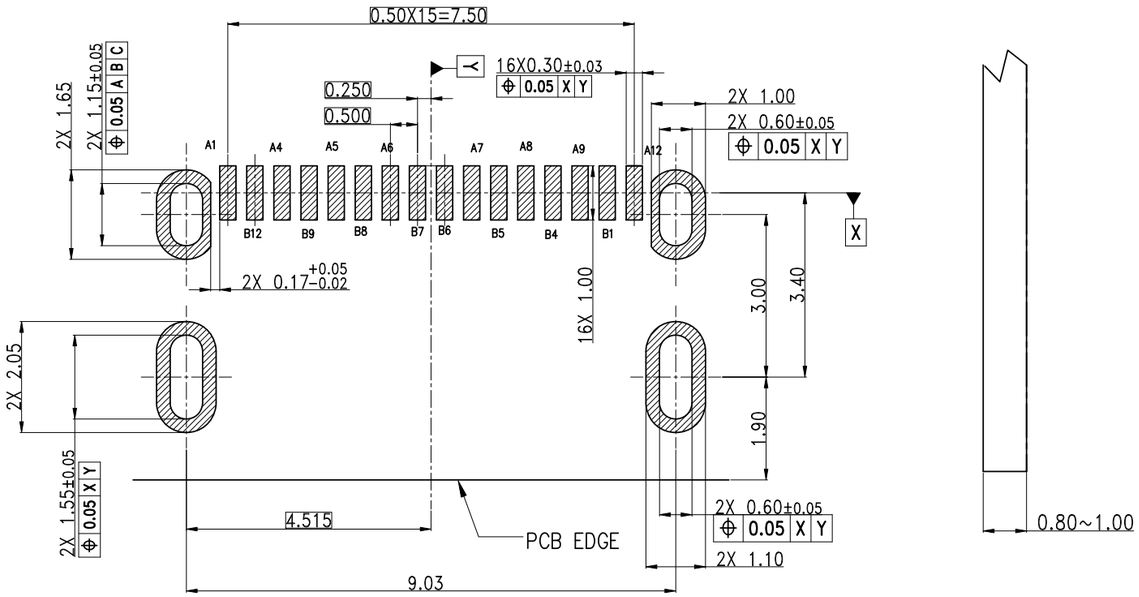






## Recommended PCB Layout (Tolerance=±0.05)

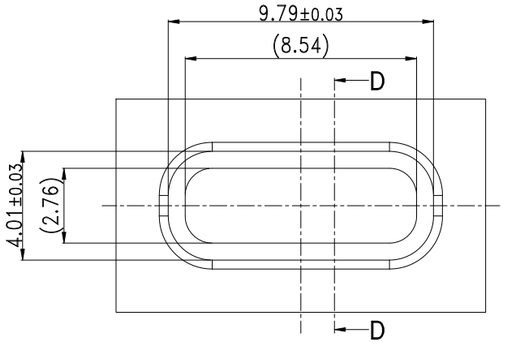


SECTION D-D(SCALE 1:1)

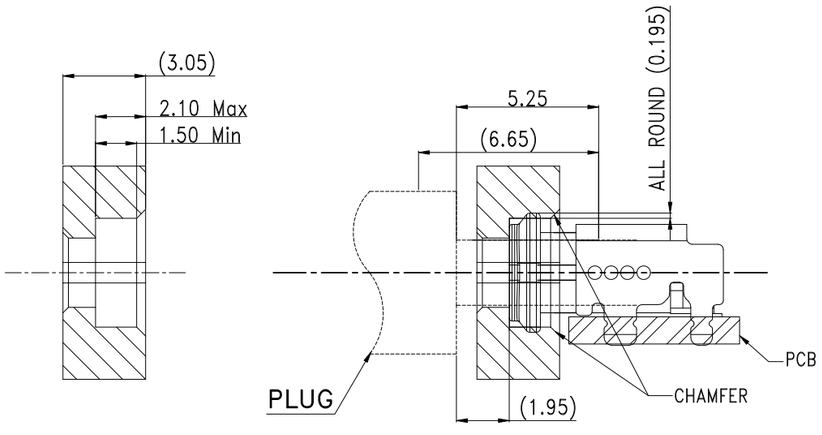


PANEL CASE WITH CONNECTOR

RECOMMENDED HOLE FOR PANEL CASE

NOTES/注释:

1. MATERIAL/材料: SEE TABLE/见下表
2. GENERAL SPECIFICATION/通用特性:
   - 2.1 COPLANARITY /共面度: 0.08 Max.
   - 2.2 CURRENT RATING: 5A / 额定电流: 5安培
   - 2.3 CONTACT RESISTANCE: 40mΩ MAX (INITIAL).
     INSULATION RESISTANCE:100MΩ Min
     接触电阻: 40毫欧最大(初始值) / 绝缘电阻: 100MΩ Min
   - 2.4 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC
     耐电压: 100伏交流
   - 2.5 MECHANICAL CHARACTERISTICS:
     INSERTION FORCE: 5~20N EXTRACTION FORCE: 8~20N
     AFTER DURABILITY EXTRACTION FORCE: 6~20N
     力学特性: 初始插入力: 5~20N 拔出力: 8~20N
     耐久后拔出力: 6~20N
   - 2.6 DURABILITY: 10000 CYCLES / 耐久性: 10000次
   - 2.7 PACKAGING TYPE: CARRIER TAPE./ 包装类型: 载带包装
3. WATERPROOF CLASS IPX8/防水等级 IPX8
4. DIMENSIONING SHALL BE INTERPRETED PER ASME Y14.5M 1994.
   尺寸标注基于ASME Y14.5M 1994标准规范
5. MATERIAL SHOULD BE FULFILLED AMPHENOL SPEC.# S-SN-002,
   FOR HALOGEN FREE PRODUCTS, ALSO NEED TO MEET S-SN-004.
   产品材料环保标准为Amphenol SSN#002,如果是无卤产品需满足标准SSN#004
6. ORDER P/N SYSTEM/产品料号编码系统 : 12402484XX12A

   Plating Spec:

   E5: Mating Area: Au 30u" Min
   Solder Area: Gold flash
   50u"Min Nickel Under Plating Over All

   XX12A
   - A:HF
   - Package Spec. 2:Reel
   - Date Code Description 0:Without D/C 1:With D/C

| ITEM | DESCRIPTION | Q'TY | MATERIAL | |
|---|---|---|---|---|
| 8 | SEALING | 1 | GLUE | RED |
| 7 | SMALL SHELL | 1 | STAINLESS STEEL | NI PLATED OR CLEANING |
| 6 | MAIN SHELL | 1 | STAINLESS STEEL | NI PLATED OR CLEANING |
| 5 | OUTOR SHELL | 1 | STAINLESS STEEL | SOLDER NICKEL: 30" MIN |
| 4 | MID PLATE | 1 | STAINLESS STEEL | NICKEL: 30U" MIN |
| 3 | BOTTOM TERMINAL | 1 | COPPER ALLOY | MATING AREA : Au30u"MIN<br>SOLDER TAIL:Gold flash, 50~150u" NICKEL OVERALL. |
| 2 | TOP TERMINAL | 1 | COPPER ALLOY | MATING AREA : Au30u"MIN<br>SOLDER TAIL:Gold flash", 50~150u" NICKEL OVERALL. |
| 1 | MOLDING HOUSING | 1 | HIGH TEMPERATURE PLASTIC | BLACK |

BILL OF MATERIAL

| | |
|---|---|
| HF(无卤) | √ |
| Non-HF(有卤) | |

UNLESS OTHERWISE SPECIFIED
TOLERANCES

| | U.S. | METRIC |
|---|---|---|
| .X | +/- | 0.50 |
| .XX | +/- | 0.25 |
| .XXX | +/- | 0.10 |
| FRACTIONS | +/- | |
| ANGLES | +/- | 3° |

FOR MATERIALS AND FINISHES SEE NOTES
REMOVE SHARP EDGES
DIMENSIONS U.S. (METRIC) INCHES (MM)

| APPROVAL | | DATE |
|---|---|---|
| DRAWN | Fei.Wu | 10/30/24' |
| CHECKED | Michael.qin | 10/30/24' |
| CHECKED | Michael.Qin | |

DRAWING FILE : R:\DC\Engineering data\PLM
ANGLE OF PROJECTION

Amphenol
Amphenol East Asia Limited


TITLE: USBC 2.0 16P SCK R-SMT CH=1.58 AU30 IPX8

| SIZE | DRAWING NO. | REV. |
|---|---|---|
| A3 | 12402484XX12A | 1 |
| SCALE | NONE | SHEET 2 OF 3 |

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concert, & that no right is granted to disclose or to use any information in this document.


# CUSTOMER DRAWING


| REVISIONS | | | | |
|---|---|---|---|---|
| SYM | ECN | DESCRIPTION | DATE | APPROVED |
| See page 1 | | | | |

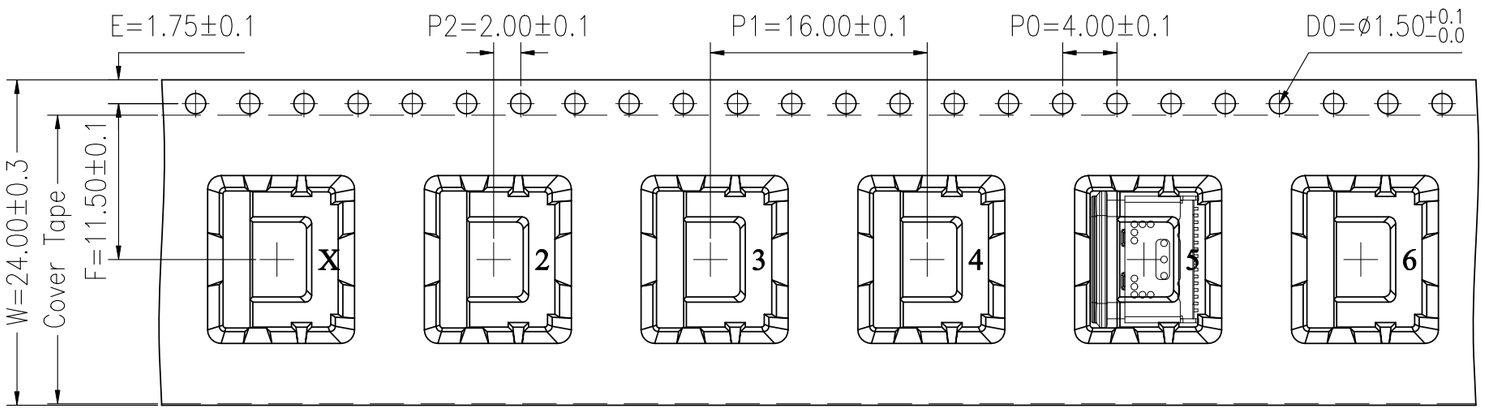


载带卷料方向


## SECTION A-A

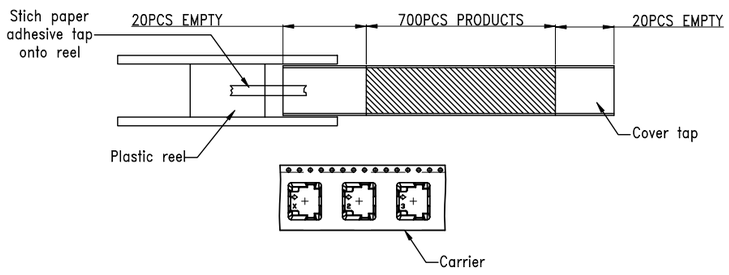

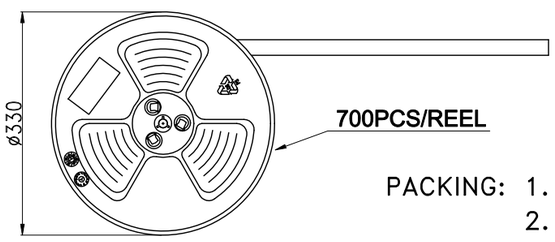




PACKING: 1. 700 PCS/REEL.
2. 10 REEL/Carton.

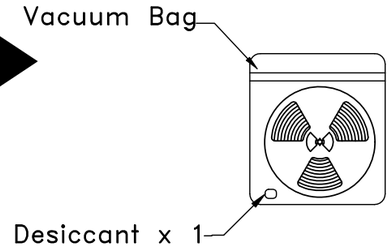
PACK DIRECTION





No.1: 1 Reel/Bag




No.2: 1 Bag / Inside Carton

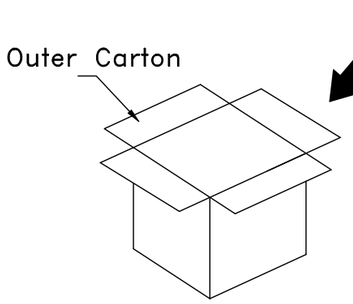


No.3: 10 Inside Carton/Out Carton




No.4: 7000 Pcs/Out Carton

Amphenol Shenzhen RoHS Compliant 2011/65/EU

| | |
|---|---|
| HF(无卤) | √ |
| Non-HF(有卤) | |

UNLESS OTHERWISE SPECIFIED
TOLERANCES

| | U.S. | METRIC |
|---|---|---|
| .X | +/- | 0.50 |
| .XX | +/- | 0.25 |
| .XXX | +/- | 0.10 |
| FRACTIONS | +/- | |
| ANGLES | +/- | 3° |

FOR MATERIALS AND FINISHES SEE NOTES
REMOVE SHARP EDGES
DIMENSIONS
U.S. (METRIC) / INCHES (MM)

| APPROVAL | | DATE |
|---|---|---|
| DRAWN | Fei.Wu | 10/30/24' |
| CHECKED | Michael.qin | 10/30/24' |
| CHECKED | Michael.Qin | |

DRAWING FILE : R:\DC\Engineering data\PLM
ANGLE OF PROJECTION

Amphenol
Amphenol East Asia Limited

TITLE
USBC 2.0 16P SCK R-SMT CH=1.58 AU30 IPX8

| SIZE | DRAWING NO. | REV. |
|---|---|---|
| A3 | 12402484XX12A | 1 |
| SCALE | NONE | SHEET 3 OF 3 |