

This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

The marking on this product doesn't contain environmental hazardous materials per directive 2011/65/EU for RoHS compliant.


FOR REFERENCE ONLY


REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
AX1	EDSR#9667	NON-RELEASE REVISION	01/13/2019	Roger Tsai







NOTES:
1. MATERIAL:
   HOUSING: H-TEMP THERMAL PLASTIC LCP UL94-V0, COLOR: BLACK
   TERMINAL: COPPER ALLOY.
   MID PLATE: STAINLESS STEEL
   SHELL: STAINLESS STEEL
2. FINISH:
   TERMINAL:
   CONTACT AREA: SELECTIVE PLATING;
   SOLDERING AREA: GOLD FLASH PLATING. ;
   UNDER PLATING: NICKEL PLATING 50 μ" THICKNESS MIN. OVERALL.
   SHELL:
   10u"(Min) NICKEL UNDERPLATING OVERALL .
   GOLD FLASH ON DIP TAIL.
3. PRODUCT SPECIFICATION REFER TO : PS-7XXX.
4. THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS PER DIRECTIVE 2011/65/EU FOR RoHS COMPLIANT. OR PER IEC 61249-2-21 FOR HALOGEN-FREE COMPLIANT.

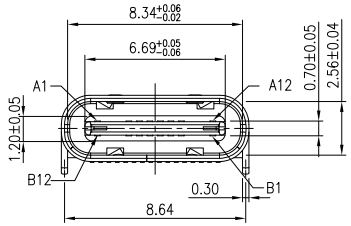








P/N : GSB1C41 X 1DYHR

CONTACT FINISH
1: FLASH GOLD



RECOMMENDED PCB LAYOUT (TOP VIEW)(±0.05mm)
(PCB THICKNESS 0.6 OR 0.8 ±0.05mm)

PIN ASSIGNMENT							
A1	A4	A5	A6	A7	A8	A9	A12
GND	VBUS	CC1	D+	D-	SBU1	VBUS	GND
GND	VBUS	SBU2	D-	D+	CC2	VBUS	GND
B12	B9	B8	B7	B6	B5	B4	B1

TOLERANCE	APPROVALS	DATE	TITLE
X. ±0.30 X.X ±0.20 X.XXX ±0.10 ANGULAR ±1° UNLESS OTHERWISE SPECIFIED	DRAWN DebbY Hung	01/13/2019	USB 2.0 TYPE C 16 PIN RECEPTACLE R/A SMT TYPE, CH=1.62mm
	CHECKED Sandy Wu	01/13/2019	
	APPROVED Roger Tsai	01/13/2019	
	DWG TYPE CUST DWG	PROJECT CODE OTHER	

UNIT	SIZE	PART No.	REV.
mm	A3	GSB1C41X1DYHR	
SCALE NA	SHEET 1 OF 2	DWG No. GSB1C41X1DYHR	AX1


Amphenol®
Amphenol Corporation
Amphenol Taiwan Corporation


This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.


The marking on this product doesn't contain environmental hazardous materials per directive 2011/65/EU for RoHS compliant.


FOR REFERENCE ONLY


REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
AX1	EDSR#9667	NON-RELEASE REVISION	01/13/2019	Roger Tsai






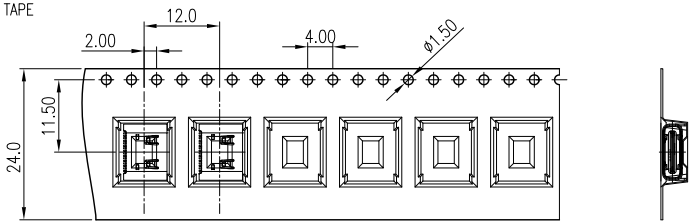

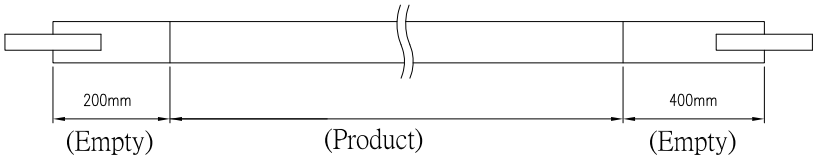

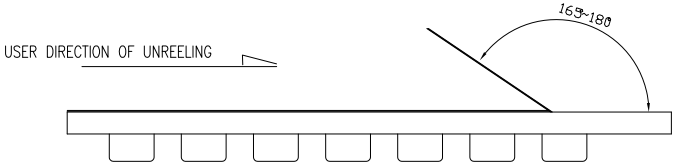

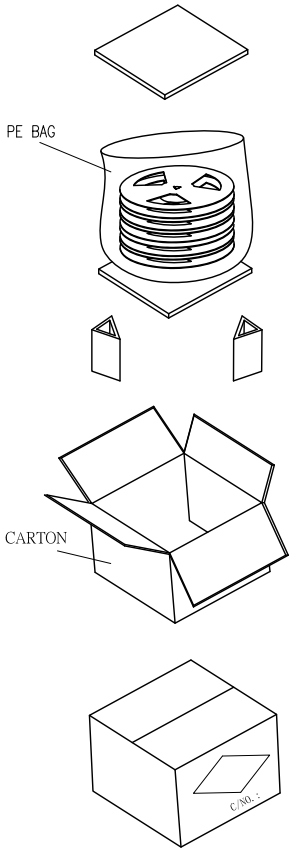

CARTON SIZE : 340mm x 330mm x 350mm

PACKAGING BY T&R	11.0 G/W KG	10.0 N/W KG	120 PCS/ REEL	10 REELS/ BOX	1200 QUANTITY (PCS)	GSB1C41X1DYHR PART NUMBER

TOLERANCE	APPROVALS	DATE
X.	DRAWN DebbY Hung	01/13/2019
X.X ±0.30	CHECKED Sandy Wu	01/13/2019
X.XX ±0.20	APPROVED Roger Tsai	01/13/2019
X.XXX ±0.10	DWG TYPE CUST DWG	PROJECT CODE OTHER
ANGULAR ±1°		
UNLESS OTHERWISE SPECIFIED		

TITLE: USB 2.0 TYPE C 16 PIN RECEPTACLE R/A SMT TYPE, CH=1.62mm

Amphenol®
Amphenol Corporation
Amphenol Taiwan Corporation

UNIT	SIZE	PART No.	REV.
mm	A3	GSB1C41X1DYHR	
SCALE NA	SHEET 2 OF 2	DWG No. GSB1C41X1DYHR	AX1