
This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.


The marking on this product doesn't contain environmental hazardous materials per directive 2011/65/EU for RoHS compliant.


FOR REFERENCE ONLY


REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
AX1	EDSR#9668	NON-RELEASE REVISION	01/13/2019	Roger Tsai


NOTES:
1. MATERIAL:
   HOUSING: H-TEMP THERMAL PLASTIC LCP UL94-V0, COLOR: BLACK
   TERMINAL: COPPER ALLOY.
   MID PLATE: STAINLESS STEEL
   SHELL: STAINLESS STEEL
2. FINISH:
   TERMINAL:
   CONTACT AREA: SELECTIVE PLATING;
   SOLDERING AREA: GOLD FLASH PLATING. ;
   UNDER PLATING: NICKEL PLATING 50 μ" THICKNESS MIN. OVERALL.
   SHELL:
   10u"(Min) NICKEL UNDERPLATING OVERALL .
   GOLD FLASH ON DIP TAIL.
3. PRODUCT SPECIFICATION REFER TO : PS-7XXX.
4. THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS PER DIRECTIVE 2011/65/EU FOR RoHS COMPLIANT. OR PER IEC 61249-2-21 FOR HALOGEN-FREE COMPLIANT.

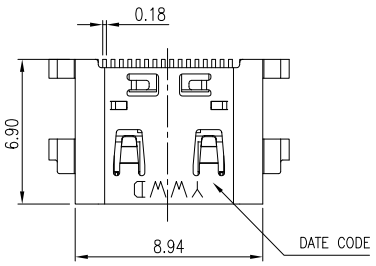





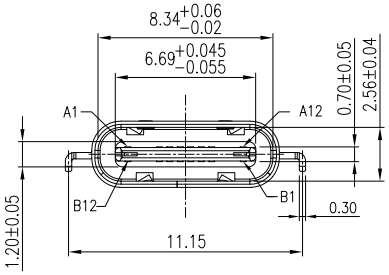





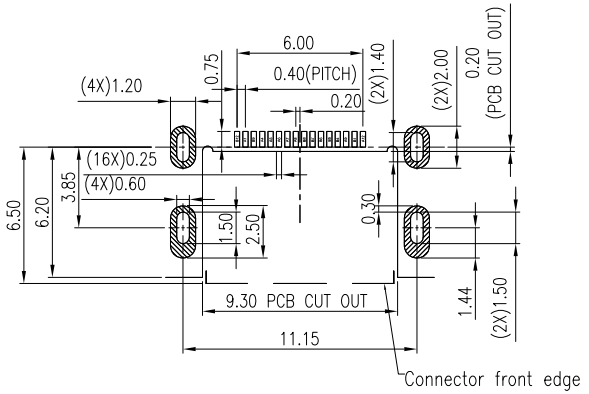



P/N : GSB1C46 X 1DYHR

CONTACT FINISH
1: FLASH GOLD

RECOMMENDED PCB LAYOUT (TOP VIEW)(±0.05mm)
(PCB THICKNESS 0.6 OR 0.8 ±0.05mm)

PIN ASSIGNMENT							
A1	A4	A5	A6	A7	A8	A9	A12
GND	VBUS	CC1	D+	D-	SBU1	VBUS	GND
GND	VBUS	SBU2	D-	D+	CC2	VBUS	GND
B12	B9	B8	B7	B6	B5	B4	B1

TOLERANCE	APPROVALS	DATE	TITLE
X. ±0.30 X.XX ±0.20 X.XXX ±0.10 ANGULAR ±1° UNLESS OTHERWISE SPECIFIED	DRAWN DebbY Hung CHECKED Sandy Wu APPROVED Roger Tsai DWG TYPE CUST DWG	01/13/2019 01/13/2019 01/13/2019 PROJECT CODE OTHER	USB 2.0 TYPE C 16 PIN RECEPTACLE R/A SINK SMT TYPE, CH=0.22mm

UNIT	SIZE	PART No.	REV.
mm	A3	GSB1C46X1DYHR	
SCALE NA	SHEET 1 OF 2	DWG No. GSB1C46X1DYHR	AX1


Amphenol®
Amphenol Corporation
Amphenol Taiwan Corporation


This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.


The marking on this product doesn't contain environmental hazardous materials per directive 2011/65/EU for RoHS compliant.


FOR REFERENCE ONLY


REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
AX1	EDSR#9668	NON-RELEASE REVISION	01/13/2019	Roger Tsai

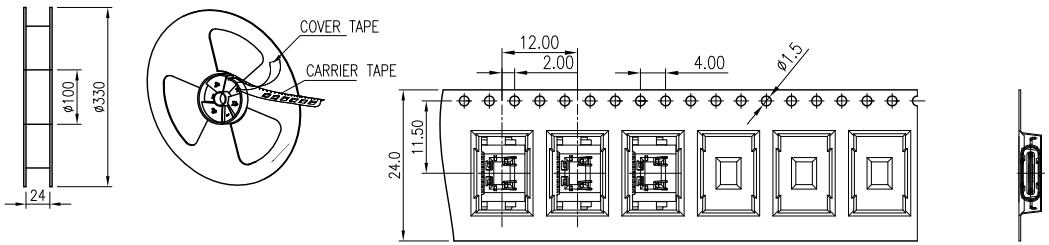

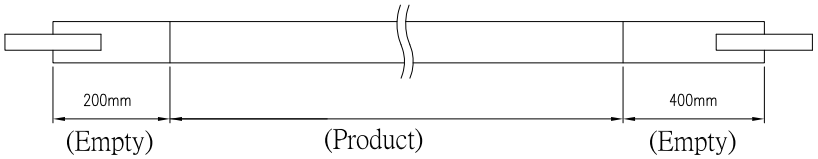

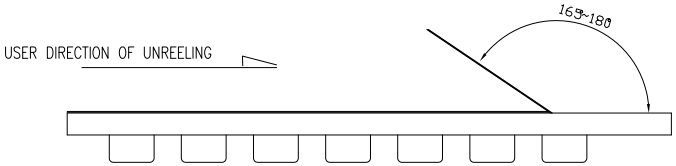

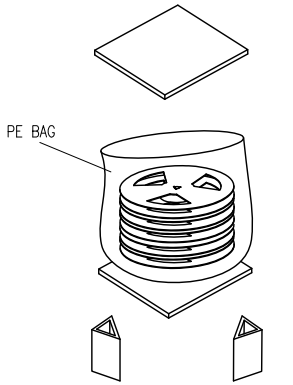

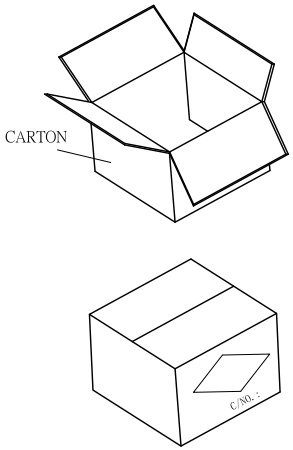

CARTON SIZE : 340mm x 330mm x 350mm

PACKAGING BY T&R	12.0 G/W KG	11.0 N/W KG	150 PCS/ REEL	10 REELS/ BOX	1500 QUANTITY (PCS)	GSB1C46X1DYHR PART NUMBER

TOLERANCE	APPROVALS	DATE
X. ±0.30 X.X ±0.20 X.XX ±0.10 X.XXX ±0.10 ANGULAR ±1° UNLESS OTHERWISE SPECIFIED	DRAWN: DebbY Hung	01/13/2019
	CHECKED: Sandy Wu	01/13/2019
	APPROVED: Roger Tsai	01/13/2019
	DWG TYPE: CUST DWG	PROJECT CODE: OTHER

TITLE: USB 2.0 TYPE C 16 PIN RECEPTACLE R/A SINK SMT TYPE, CH=0.22mm

Amphenol®
Amphenol Corporation
Amphenol Taiwan Corporation

UNIT	SIZE	PART No.	REV.
mm	A3	GSB1C46X1DYHR	
SCALE: NA	SHEET: 2 OF 2	DWG No. GSB1C46X1DYHR	AX1