

SHERWOOD-LOGAN & ASSOCIATES, INC.

WASH. (301) 970-2181

2140 RENARD COURT
ANNAPOLIS, MARYLAND 21401
FAX: (410) 841-6330

BALT: (410) 841-6810

**32384 CHARLES COUNTY POMONKEY PUMP STATION
IMPROVEMENTS**

UPS PANEL RESUBMITTAL

SECTION 17441 - CONTROLS SYSTEM HARDWARE

April 16, 2026

ENGINEER: WRA

CONTRACTOR: JOHNSTON CONSTRUCTION

***MANUFACTURERS' REPRESENTATIVE FOR ENGINEERED INSTRUMENTATION,
PROCESS EQUIPMENT AND PUMPING SYSTEMS***

Branch Offices: RICHMOND, VA and LEOLA, PA

32384 CHARLES COUNTY POMONKEY PUMP STATION IMPROVEMENTS

Table of Contents

Comments

Parts Index

Data Sheets

Drawing Index

Drawings

32384 CHARLES COUNTY POMONKEY PUMP STATION IMPROVEMENTS

General Comments:

Resubmittal #17441-03-01 Comment Confirmations:

1. Load calculation on page 26/59 indicates "... UPS has a runtime of approximately 3 hours and 2854 minutes." Revise typo.

Sherwood Logan Response:

The typo for the load calculation has been fixed.

2. Equipment is conditionally approved provided that all panels (SCP, SPMP-01, SPMP-02, SFAN-01, UPS, and PLC) fit within the 11-ft backplate and comply with all applicable NFPA and NEC requirements. Final panel layout, dimensions, and code compliance remain the Contractor's responsibility.

Sherwood Logan Response:

Responsibility for final panel layout and dimensions is acknowledged and understood by Sherwood Logan and Associates, however Sherwood Logan and Associates is not responsible for code compliance.

3. Revise nameplate item #2 QTY.

Sherwood Logan Response:

Nameplate item #2 quantity has been appropriately revised.

4. Circuit Breaker 7940102580 is identified on cutsheet but not shown on BOM or wiring diagrams. Revise for conformity.

Sherwood Logan Response:

The cutsheet for circuit breakers has been revised so as not to highlight circuit breaker 7940102580.

5. Contractor shall confirm that the control panel shall be UL 508A listed.

Sherwood Logan Response:

Sherwood Logan and Associates confirms that the control panel shall be UL 508A listed upon fabrication.

6. Provide breakdown of 24VDC power supply load and remove digital recorder from load calculation. Refer to submittal "SCADA Control Panel 17250-01" comments for additional information.

Sherwood Logan Response:

A breakdown of the 24VDC power supply load calculation has been provided with the digital chart recorder removed.“

7. It would be desirable to include spare fuse blocks and neutrals/commons to accomodate for future expansion.

Sherwood Logan Response:

This panel was not designed with any fuse blocks, however spare terminal blocks will be supplied according to control panel specifications.

Parts Index:

SHT	MANUFACTURER	MODEL	DESCRIPTION
1	SCE	SCE-30H2416SSLP	Wall Mount Enclosure - NEMA 4X
1	SCE	SCE-30P24	Enclosure Backpanel
2	Weidmuller	7940102572	Circuit Breaker, 120VAC, 2A
2	Weidmuller	7940102584	Circuit Breaker, 120VAC, 20A
2	Weidmuller	7940102582	Circuit Breaker, 120VAC, 15A
3	Leviton	T5015-W	Single Receptacle, 15A
4	Schneider Electric	RPM42F7	Relay, SP4T, 120VAC, 15A
4	Schneider Electric	RPZF4	Miniature Relay Socket, 120VAC, DIN
5	APC	SRT1000XLA	Uninterruptible Power Supply
5	APC	AP9614	Dry Contact I/O Card
5	APC	SRT48BP	UPS External Battery Pack
6	SCE	SCE-TSH50	Enclosure Heater
7	Finder	7T.81.0.000.2403	Enclosure Heater Thermostat, NC
8	Phoenix Contact	3044076	Terminal Block
8	Phoenix Contact	3044092	Grounding Terminal Block
8	Phoenix Contact	3047028	Terminal End Barrier
8	Phoenix Contact	0800886	Terminal Anchor

**32384 CHARLES COUNTY POMONKEY PUMP STATION
IMPROVEMENTS**

Data Sheet 1

Customer:	Johnston Construction
Reference:	Charles County Pomonkey Pump Station Improvements
Date:	04/16/2026
<u>Qty</u>	<u>Description</u>
1	Mfg: SCE: Wall Mount Enclosure - NEMA 4X Model Number: SCE-30H2416SSLP Tags/Service: ENC / UPS Panel Specifications: • 0.075" stainless steel type 304 • Flange trough around all sides of door opening • Oil-resistant door gasket • Hasp and staple for padlocking • Stainless steel continuous hinge • Ground stud on door • NEMA 4X rated
1	Mfg: SCE: Enclosure Backpanel Model Number: SCE-30P24 Tags/Service: ENC / UPS Panel Specifications: • Bent subpanel • 27"H x 21"W x 0.88"D dimensions • Powder coated white finish




Saginaw Control and Engineering
95 Midland Road Saginaw, MI 48638-5770
(800) 234-6871 - Fax: (989) 799-4524
SCE@SaginawControl.com

WALL MOUNT ENCLOSURE - NEMA 4X

SCE-30H2416SSLP

TAGS: ENC

~~SCE-30EL2416SSLP~~ Cost Effective Alternative.

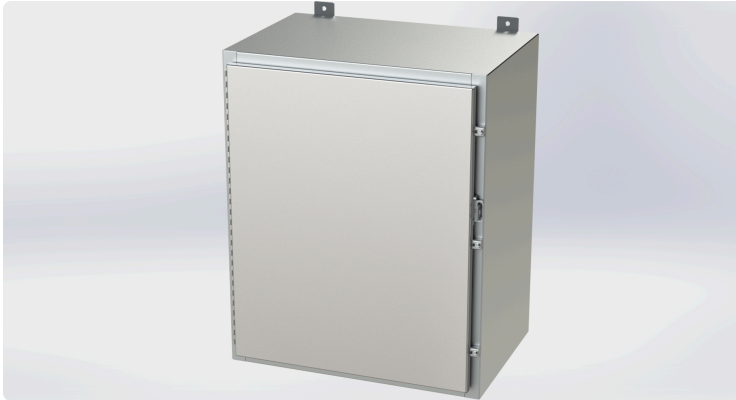

Product Specifications:

Part Number: SCE-30H2416SSLP
Description: Nema 4X LP Enclosure
Height: 30.00"
Width: 24.00"
Depth: 16.00"
Price Code: S3
List Price: \$1,989.18
Catalog Page: 268
Est. Ship Weight: 81.00 lbs

Construction

- * 0.075 In. stainless steel Type 304.
- * Continuously welded seams ground smooth.
- * Flange trough collar around all sides of door opening.
- * Oil-resistant door gasket.
- * Collar studs provided for mounting optional subpanels.
- * Hasp and staple for padlocking.
- * Stainless steel continuous hinge.
- * Removable print pocket furnished if height and width of enclosure is greater than 12 Inches.
- * Ground stud on door.
- * Stainless steel clamps on three sides door when greater than 30 inch wide.
- * Mounting provision top and bottom of back.

Application

Designed to house electrical and electronic controls, instruments and components in areas which may be regularly hosed down or are very wet conditions. Provides protection from dust, dirt, oil and water. For outdoor application a drip shield is recommended. For outdoor application a drip shield and drain vent is recommended.

For details about the design, performance expectations, applications and design suggestions - See Design Considerations
www.saginawcontrol.com/instman/considerations.pdf

Finish

#4 brushed finish on all exterior surfaces. Optional sub-panels are powder coated white.

Industry Standards - (IS6)

- * NEMA Type 3R, 4, 4X, 12 and Type 13
- * UL Listed Type 3R, 4, 4X and 12
- * CSA Type 4, 4X and 12
- * IEC 60529
- * IP 66

Notes

Provision for Lifting Lugs on enclosures when Height >48" and Depth >16". The Lifting Lug assembly will be included with the enclosure bolt pack.

Optional Accessories

SCE-30P24 Subpanel, Bent
SCE-30P24GALV Subpanel, Bent Galvanized
SCE-BVK Breather Vent
SCE-DS24SS Shield, S.S. Drip
SCE-LPCLAMPSS Assembly, S.S. LP Clamp (2pcs)
SCE-LPCR LP Style Quick Release Clamp Assy (Stainless)
SCE-NADFKSS Kit, S.S. Swing-Out Panel Mounting
SCE-RD30H24SS Door, Replacement

Similar Part Numbers

SCE-20H1606SSLP Nema 4X LP Enclosure
SCE-20H1608SSLP Nema 4X LP Enclosure
SCE-20H1610SSLP Nema 4X LP Enclosure
SCE-20H2006SSLP Nema 4X LP Enclosure
SCE-20H2408SSLP Nema 4X LP Enclosure
SCE-24H1608SSLP Nema 4X LP Enclosure
SCE-24H2006SSLP Nema 4X LP Enclosure
SCE-24H2008SSLP Nema 4X LP Enclosure
SCE-24H2010SSLP Nema 4X LP Enclosure
SCE-24H2406SSLP Nema 4X LP Enclosure

Installation Information

- * Drip Shield Kit Assembly
- * Swing Panel Assembly for LP Enclosures
- * Clamp Fastened Single Door Enclosures (Stainless Steel)
- * NEMA 12 and 4 Clamp Fastened Single Door Enclosure



Your Enclosure Source®

ENCLOSURE BACKPANEL

Saginaw Control and Engineering
95 Midland Road Saginaw, MI 48638-5770
(800) 234-6871 - Fax: (989) 799-4524
SCE@SaginawControl.com

SCE-30P24 TAGS: ENC

Product Specifications:



Part Number: SCE-30P24
Description: Subpanel, Bent
Height: 27.00"
Width: 21.00"
Depth: 0.88"
Price Code: P3
List Price: \$78.18
Catalog Page: 444
Est. Ship Weight: 22.00 lbs

Finish

Powder Coated White.

Industry Standards - (IS17)

- ⚙ NEMA Not Applicable
- ⚙ UL Not Applicable
- ⚙ CSA N/A

Similar Part Numbers

SCE-16P10Subpanel, Flat
SCE-16P14Subpanel, Flat
SCE-16PB12Subpanel, Flat for SCE-20PBH
SCE-18P16PCSubpanel, Flat
SCE-20P12Subpanel, Flat
SCE-20P16Subpanel, Flat
SCE-20P16JSubpanel, Flat Junction
SCE-20P18HMISubpanel, Flat
SCE-20P20Subpanel, Flat
SCE-20P20CSubpanel, Flat

Installation Information

- ⚙ Sub-Plate Layout & Grounding for 10-32

Data Sheet 2

Customer:	Johnston Construction
Reference:	Charles County Pomonkey Pump Station Improvements
Date:	04/16/2026
<u>Qty</u>	<u>Description</u>
1	Mfg: Weidmuller: Circuit Breaker, 120VAC, 2A Model Number: 7940102572 Tags/Service: CB3203 / UPS Panel Specifications: • 240VAC operating voltage • -40...85°C operating temperature range • 10kA ampere interrupting capacity • 2A current rating • Medium time delay
1	Mfg: Weidmuller: Circuit Breaker, 120VAC, 20A Model Number: 7940102584 Tags/Service: CB3203A / UPS Panel Specifications: • 240VAC operating voltage • -40...85°C operating temperature range • 10kA ampere interrupting capacity • 20A current rating • Medium time delay

2	Mfg: Weidmuller: Circuit Breaker, 120VAC, 15A Model Number: 7940102582 Tags/Service: CB3204, CB3211 / UPS Panel Specifications: • 240VAC operating voltage • -40...85°C operating temperature range • 10kA ampere interrupting capacity • 15A current rating • Medium time delay
---	--

CIRCUIT BREAKER, 120VAC


TAGS: CB3203, CB3203A, CB3204, CB3211

Datasheet


QL Series Hydraulic-Magnetic Miniature Circuit Breakers



Dual mount - 1 pole

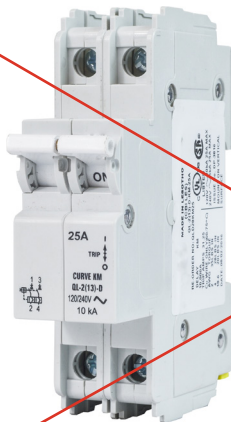

DIN mount - 2 pole

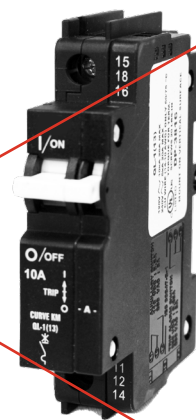

Dual mount + auxiliary

Features

- AC Circuit Breaker
- Hydraulic-Magnetic technology
- 100% rating capability, independent of ambient temperature
- One, two and three pole (UL). One, two, three pole and 1+N, 3+N (VDE).
- VDE and CCC approved, CE certified
- UL 489 Listed, CSA 22.2 certified
- Ratings 0.5A to 25A
- Optional Auxiliary Switch / Trip Alarm - factory fitted (6.5 mm wide)
- Wide range of time delays and operating currents
- Precision tripping characteristics
- Ultra compact – 13 mm wide module
- Trip indication with mid-trip handle
- Reset immediately after overload
- DIN mount product in grey shells
- Dual mount product in black shells
- Ring terminal ready (terminal screw is removable)

Applications:

- AC branch circuit protection (UL 489, IEC / EN 60847-2)
- Telecom / datacom equipment
- Lighting control
- UPS equipment
- Alternative energy equipment
- Mobile power generation equipment
- Power conditioning equipment

Auxiliary Switch, Trip Alarm & Combo Features

- Factory fitted
- Attached to right hand side of Circuit Breaker
- Compact 6.5 mm width
- AC or DC voltages
- UL 489 listed (Auxiliary Switch: 6 A 240VAC, 0.5 A 110VDC)
- IEC 60947-5-1 approved (Auxiliary Switch: 6 A 240 V AC, 0.5 A 110 V DC; Trip Alarm: 6 A 240 V AC, 0.5 A 110 V DC)

Optional Accessories

- Auxiliary Switch (DIN and Dual Mount)
- Auxiliary Switch + Trip Alarm (Dual Mount only)
- Trip Alarm (Dual Mount only)
- Handle lock
- Surface mounting clips
- Busbar
- 57 mm Escutcheon blank (Dual Mount only)
- 57 mm Safety blank (Dual Mount only)

Approvals



Technical data

Approvals		IEC / EN 60947-2, VDE			
Number of poles	1	2 (1+N)	2	3	4(3+N)
Operating voltages	240 V AC	240 V AC	415 V AC	415 V AC	415 V AC
Minimum current rating			0.5 A		
Maximum current rating			25 A		
Interrupting capacity			6 kA		
Operating temperature range			-40°C to +85°C		
Mounting options			DIN Rail, Dual mounting (DIN & Mini), surface mounting clip		
Time delay curves			1, 3, 9, KM, OP		

Approvals		UL 489			
Number of poles	1	1	2	3	
Operating voltages	120 V AC	240 V AC	120 / 240 V AC	240 V AC	
Minimum current rating			0.5 A		
Maximum current rating	25 A	25 A	25 A	25 A	
Ampere interrupting capacity (AIC)	10 kA	5 kA	10 kA	5 kA	
Operating temperature range			-40°C to +85°C		
Mounting options			DIN Rail, Dual mounting (DIN & Mini), surface mounting clip		
Time delay curves			1, 3, 9, KM, OP		

Insulation coordination and general data	
Endurance	10000 operations; 1500 electrical at rated current, 8500 without current (IEC 60947-2 Clause 7.2.4.2)* 6000 electrical operations (UL 489 Clause 7.1.9)*
Dielectric strength	1000-2000 Vac for one minute (IEC 60947-2 Clause 8.3.3.3)* 1000 Vac plus twice the rated voltage for one minute (UL 489 Clause 7.1.9)*
Rated impulsive withstand voltage	4 kV (IEC 60947-2)
Weight	102 g per pole, 160 g with auxiliary (unpacked)
Altitude	Certification tests done at altitude = 2000 metres. Will operate at higher altitudes.
Shock	8 G (IEC 60068-2-6) (sinusoidal wave)
Vibration	0.5 G (IEC 60068-2-6) (sinusoidal wave)
Flammability	I3 - Ignition does not persist at 850°C after glow wire is withdrawn with an oxygen index of ≥ 28
Toxicity	F1 - Smoke index of ≤ 20 which determines the fumes class
Pollution degree	PD2 - Normally only non-conductive pollution occurs. Temporary conductivity caused by condensation is to be expected.

Breaker: QL	Wire Size mm² (IEC)	Wire Gauge (UL)	Torque (IEC)	Torque (UL)	Comments
Main terminals	0.75 - 35 mm²	18 - 3 - AWG	2.5 Nm	20 in-lb	Pozidriv #2 Combi head

Long code

Example code: QL-AT-3-13-D-KM-15-R

Group	1	2	3	4	5	6	7	8	9	10
Requirement	QL Frame	Switch / Neutral	Auxiliary + Trip Alarm	Triple pole	13 mm module width	DIN Mounting	Medium delay curve KM	Current Rating 15 A	No Shunt Trip	Ring Terminal
Long Code	QL	-	AT	3	13	DM	KM	15.0	-	R

Group 1: Frame Type	Code	Description	Comments	
	QL	13 mm wide Miniature Circuit Breaker	UL 489, IEC / EN 60947-2, VDE, CE, CCC	
Group 2: Switch/Neutral	Code	Description	Comments	
	-	Not applicable	Overload poles do not have any further coding	
	N	Neutral	Green Handle	
Group 3: Auxiliary	Code	Description	Comments	
	-	Not applicable	Use this code if no Auxiliary used	
	A	Auxiliary Switch (1 x Aux in 1 module)	6.5 mm module fitted on right hand side (DIN & Dual Mount)	
	T	Trip Alarm (1 x Trip Alarm in 1 module)	6.5 mm module fitted on right hand side (Dual Mount only)	
	AT	Auxiliary Switch + Trip Alarm combo (combined in 1 module)	6.5 mm module fitted on right hand side (Dual Mount only)	
Group 4: No of Poles	Code	Description	Comments	
	1	Single pole		
	2	Double pole	2 pole or 1+N	
	3	Triple pole		
	4	Four pole	3+N only	
Group 5: Module Width	Code	Description	Comments	
	(13)	13 mm module width	13 mm per pole	
Group 6: Mounting	Code	Description	Comments	
	D	DIN rail mount	DIN mount supplied in grey only - 45 mm Escutcheon, grey body	
	DM	Dual mount	Dual mount supplied in black only - 57 mm Escutcheon, black body	
Group 7: Time Delays	Code	Description	Instantaneous Trip Point (x In)	Comments
	1	Long time delay, high instantaneous trip	10 - 20	Orange handle
	3	Short time delay	3 - 5	White handle
	9	Long time delay	7 - 12	White handle
	KM	Medium time delay	6 - 12	White handle
	OP	Instantaneous	None	White handle
Group 8: Current Ratings	Code	Description	Comments	
		0.5, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 15, 16, 20, 25 A	Ratings available vary depending on certification * Other ratings are available as special orders. Check availability.	
Group 9: Shunt Trip (not certified, only offered as special order)	Code	Description	Comments	
	-	Not applicable	If no shunt trip is required	
	U0	12 Vdc Shunt trip (Flying Leads)	Flying leads (+/- 60 mm long)	
	U1	24 Vdc Shunt trip (Flying Leads)	Recommended pulse duration 100 ms to 60 s	
	U2	48 Vdc Shunt trip (Flying Leads)	Note: Shunt trip carries no approvals - available as a special offer only	
	U3	60 Vdc Shunt trip (Flying Leads)		
	U4	110 Vdc & 110 - 230 Vac Shunt Trip (Fly Leads)		
Group 10: Special Termination	Code	Description	Comments	
	R	Ring Terminal ready	Terminal Screw is removable. Ring lug (5 mm)	

QL Series Single Pole



Type: Single Pole (up to 240 VAC)		
Current Ratings (amps)	Description	Order Number
0.5	QL-1-13-DM-KM-0.5	7940102571
1	QL-1-13-DM-KM-1.0	7940126379
2	QL-1-13-DM-KM-2.0	7940102572
3	QL-1-13-DM-KM-3.0	7940102573
4	QL-1-13-DM-KM-4.0	7940102574
5	QL-1-13-DM-KM-5.0	7940102575
6	QL-1-13-DM-KM-6.0	7940102576
7	QL-1-13-DM-KM-7.0	7940102577
8	QL-1-13-DM-KM-8.0	7940102578
9	QL-1-13-DM-KM-9.0	7940102579
10	QL-1-13-DM-KM-10.0	7940102580
13	QL-1-13-DM-KM-13.0	7940102581
15	QL-1-13-DM-KM-15.0	7940102582
16	QL-1-13-DM-KM-16.0	7940102583
20	QL-1-13-DM-KM-20.0	7940102584
25	QL-1-13-DM-KM-25.0	7940102585

QL Series Single Pole (long time delay/high instant trip)



Type: Single Pole (up to 240 VAC) (long time delay/high instant trip)		
Current Ratings (amps)	Description	Order Number
1	QL-1-13-DM-1-1.0	7940115210
2	QL-1-13-DM-1-2.0	7940112653
3	QL-1-13-DM-1-3.0	7940115283
4	QL-1-13-DM-1-4.0	7940115284
5	QL-1-13-DM-1-5.0	7940113986
6	QL-1-13-DM-1-6.0	7940115211
7	QL-1-13-DM-1-7.0	7940114950
8	QL-1-13-DM-1-8.0	7940115282
10	QL-1-13-DM-1-10.0	7940102587
15	QL-1-13-DM-1-15.0	7940113987
16	QL-1-13-DM-1-16.0	7940114409
20	QL-1-13-DM-1-20.0	7940102588
25	QL-1-13-DM-1-25.0	7940112654

QL Series Double Pole



Type: Double Pole (up to 240 VAC)		
Current Ratings (amps)	Description	Order Number
0.1	QL-2-13-DM-KM-0.1	7940115220
0.5	QL-2-13-DM-KM-0.5	9926252000
1	QL-2-13-DM-KM-1.0	7940102643
2	QL-2-13-DM-KM-2.0	7940102644
3	QL-2-13-DM-KM-3.0	7940102645
4	QL-2-13-DM-KM-4.0	7940102646
5	QL-2-13-DM-KM-5.0	7940102647
6	QL-2-13-DM-KM-6.0	9926252006
7	QL-2-13-DM-KM-7.0	7940102649
8	QL-2-13-DM-KM-8.0	7940102650
10	QL-2-13-DM-KM-10.0	9926252010
12	QL-2-13-DM-KM-12.0	7940115938
13	QL-2-13-DM-KM-13.0	7940102652
15	QL-2-13-DM-KM-15.0	9926252015
16	QL-2-13-DM-KM-16.0	7940102654
20	QL-2-13-DM-KM-20.0	7940126749
25	QL-2-13-DM-KM-25.0	7940102656

QL Series Double Pole (long time delay/high instant trip)



Type: Double Pole (up to 240 VAC) (long time delay/high instant trip)		
Current Ratings (amps)	Description	Order Number
2	QL-2-13-DM-1-2.0	7940102657
3	QL-2-13-DM-1-3.0	7940114949
4	QL-2-13-DM-1-4.0	7940113820
5	QL-2-13-DM-1-5.0	7940102658
6	QL-2-13-DM-1-6.0	7940102659
7	QL-2-13-DM-1-7.0	7940114948
10	QL-2-13-DM-1-10.0	7940102660
13	QL-2-13-DM-1-13.0	7940113821
15	QL-2-13-DM-1-15.0	7940102661
20	QL-2-13-DM-1-20.0	7940113822
25	QL-2-13-DM-1-25.0	7940113823

QL Series Triple Pole



Type: Triple Pole (up to 240 VAC)		
Current Ratings (amps)	Description	Order Number
1	QL-3(13)-DM-KM-1.0	7940102691
2	QL-3(13)-DM-KM-2.0	7940102692
5	QL-3-13-DM-KM-5.0	7940102693
10	QL-3-13-DM-KM-10.0	7940104412
15	QL-3-13-DM-KM-15.0	7940102694
20	QL-3-13-DM-KM-20.0	7940102695
25	QL-3-13-DM-KM-25.0	7940102696

QL Series Single Pole w/ Auxiliary Contact



Type: Single Pole (up to 120 VAC)		
Current Ratings (amps)	Description	Order Number
1	QL-A-1-13-DM-KM-1.0	7940102708
2	QL-A-1-13-DM-KM-2.0	7940102709
3	QL-A-1-13-DM-KM-3.0	7940102710
5	QL-A-1-13-DM-KM-5.0	7940102711
10	QL-A-1-13-DM-KM-10.0	7940102712
15	QL-A-1-13-DM-KM-15.0	7940102713
20	QL-A-1-13-DM-KM-20.0	7940102714
25	QL-A-1-13-DM-KM-25.0	7940102715

QL Series Double Pole w/ Auxiliary Contact



Type: Double Pole (up to 240 VAC)		
Current Ratings (amps)	Description	Order Number
1	QL-A-2-13-DM-KM-1.0	7940114041
2	QL-A-2-13-DM-KM-2.0	7940119828
5	QL-A-2-13-DM-KM-5.0	7940119829
15	QL-A-2-13-DM-KM-15.0	7940119830
20	QL-A-2-13-DM-KM-20.0	7940119831

QL Series Single Pole (Alarm Contact)



Type: Single Pole (up to 120 VAC)		
Current Ratings (amps)	Description	Order Number
1	QL-T-1-13-DM-KM-1.0	7940114042
2	QL-T-1-13-DM-KM-2.0	7940114043
5	QL-T-1-13-DM-KM-5.0	7940114044
10	QL-T-1-13-DM-KM-10.0	7940102724
15	QL-T-1-13-DM-KM-15.0	7940114045
20	QL-T-1-13-DM-KM-20.0	7940114046
25	QL-T-1-13-DM-KM-25.0	7940114047

QL Series Double Pole (Alarm Contact)



Type: Double Pole (up to 240 VAC)		
Current Ratings (amps)	Description	Order Number
1	QL-T-2-13-DM-KM-1.0	7940114048
2	QL-T-2-13-DM-KM-2.0	7940114049
5	QL-T-2-13-DM-KM-5.0	7940114050
10	QL-T-2-13-DM-KM-10.0	7940114051
15	QL-T-2-13-DM-KM-15.0	7940114052
20	QL-T-2-13-DM-KM-20.0	7940114053
25	QL-T-2-13-DM-KM-25.0	7940114054

QL Series Triple Pole (Alarm Contact)



Type: Triple Pole (up to 240 VAC)		
Current Ratings (amps)	Description	Order Number
1	QL-T-3(13)-DM-KM-1.0	7940115448
2	QL-T-3(13)-DM-KM-2.0	7940115449
5	QL-T-3(13)-DM-KM-5.0	7940115450
10	QL-T-3(13)-DM-KM-10.0	7940115451
15	QL-T-3(13)-DM-KM-15.0	7940115452
20	QL-T-3(13)-DM-KM-20.0	7940115453
25	QL-T-3(13)-DM-KM-25.0	7940115454

QL Series Single Pole Combination (Auxiliary & Alarm Contact)







Type: Single Pole (up to 120 VAC)		
Current Ratings (amps)	Description	Order Number
1	QL-AT-1-13-DM-KM-1.0	7940114055
5	QL-AT-1-13-DM-KM-5.0	7940102725
10	QL-AT-1-13-DM-KM-10.0	7940102726
15	QL-AT-1-13-DM-KM-15.0	2853970000
20	QL-AT-1-13-DM-KM-20.0	7940114056
25	QL-AT-1-13-DM-KM-25.0	7940114057

QL Series Double Pole Combination (Auxiliary & Alarm Contact)




Type: Double Pole (up to 240 VAC)		
Current Ratings (amps)	Description	Order Number
1	QL-AT-2-13-DM-KM-1.0	7940114058
2	QL-AT-2-13-DM-KM-2.0	7940114059
10	QL-AT-2-13-DM-KM-10.0	7940126754
15	QL-AT-2-13-DM-KM-15.0	7940102727
20	QL-AT-2-13-DM-KM-20.0	7940114060
25	QL-AT-2-13-DM-KM-25.0	7940114061

Time Delay Curves

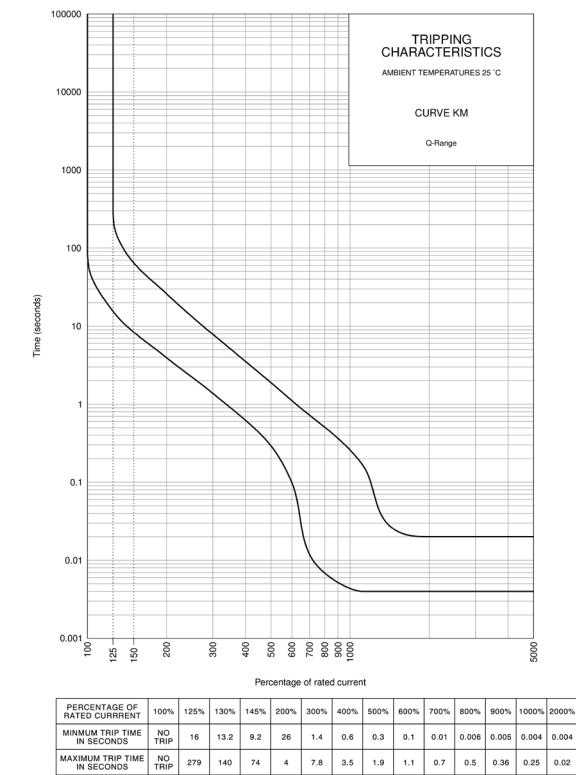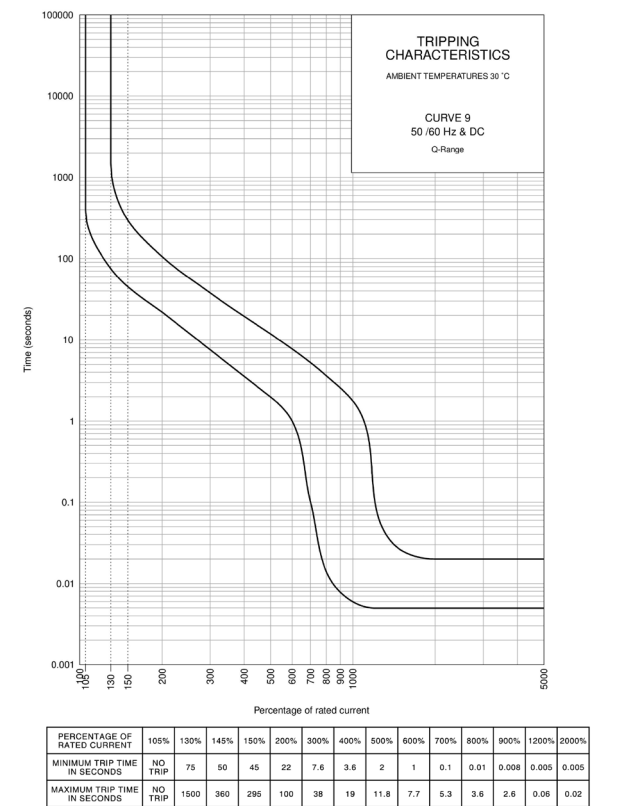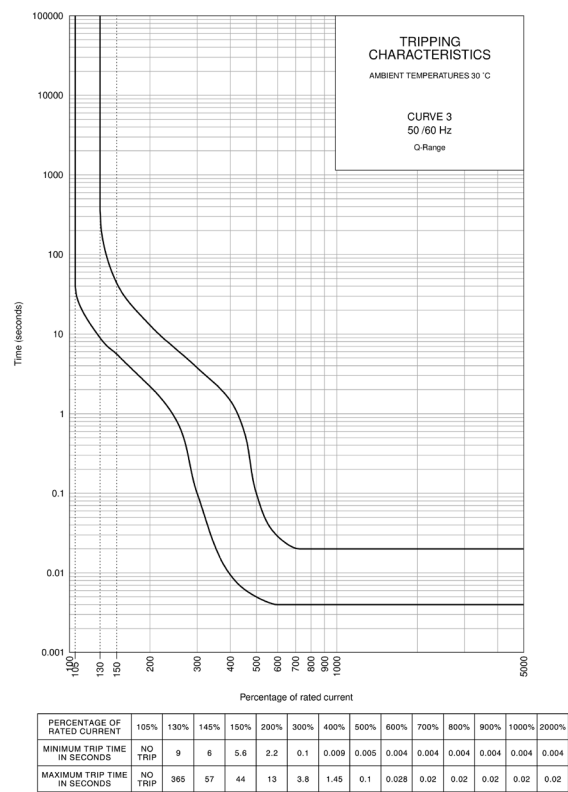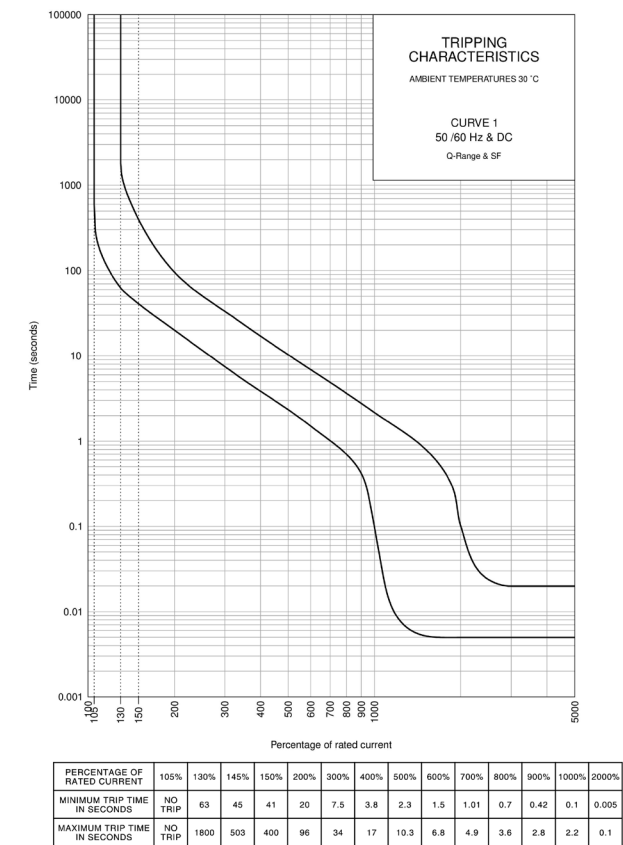


Time Delay Curves

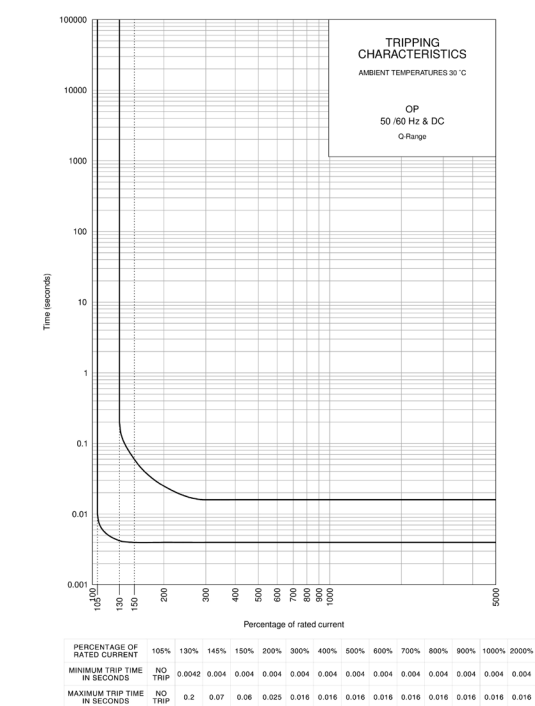


* The published time delay curves are generated at 30°C ambient temperature with the Circuit Breaker mounted in the up-right position. The "must hold", "must trip" and "instantaneous trip" current values are not affected by temperature, although delay time for the other operating current values may have to be adjusted using the temperature compensation curve which is available on request.


Internal Impedance vs Current Rating

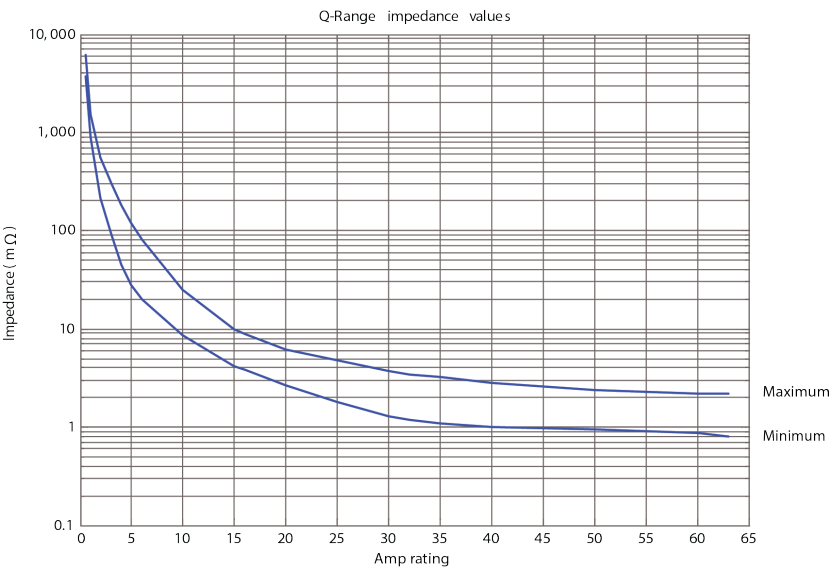

Outline Dimensions: Dual mount

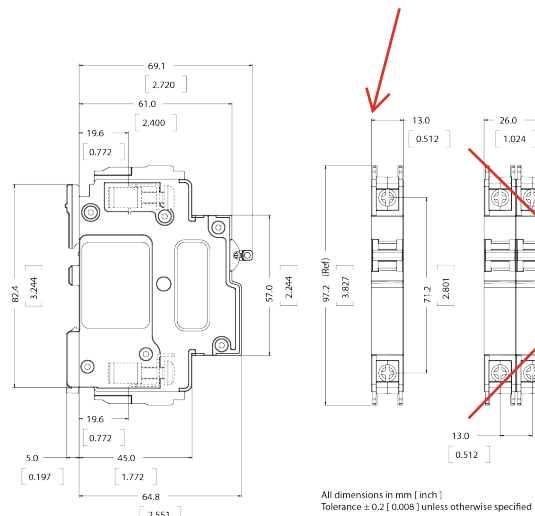

Outline Dimensions: DIN mount

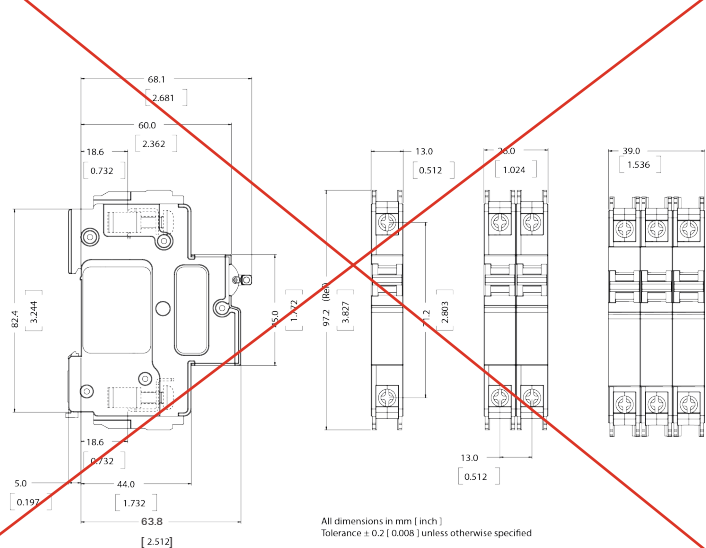

Data Sheet 3

Customer:	Johnston Construction
Reference:	Charles County Pomonkey Pump Station Improvements
Date:	04/16/2026
<u>Qty</u>	<u>Description</u>
1	Mfg: Leviton: Single Receptacle, 15A Model Number: T5015-W Tags/Service: RECP3204 / UPS Panel Specifications: • 125VAC rated supply voltage • 15A rated current • 2-pole, 3 wire grounding • White thermoplastic nylon body material • Brass 8-32 grounding screw • Zinc-plated steel strap material

T5015-W

Tamper-Resistant Single Receptacle, 15 Amp, 125 Volt

Single Receptacle Outlet, Commercial Specification Grade, Tamper-Resistant, Smooth Face, 15 Amp, 125 Volt, Back and Side Wire, NEMA 5-15R, 2-Pole, 3-Wire - White



Color :  White

UPC Code : 078477381793

Country Of Origin : Mexico

NEMA :  5-15R

Available Colors :



Technical Information

AC Horsepower Ratings

At Rated Voltage : 1/2 HP

Electrical Specifications

Amperage : 15 A

Current Limiting : Full Rated Current

Dielectric Voltage :
Withstands 2000V per UL498

Pole : 2

Temperature Rise : Max 30C
after 250 cycles OL at 200
percent rated current

Voltage : 125 VAC

Wire : 3

Environmental Specifications

Operating Temperature : -40°
C to 60°C

Material Specifications

Body Material : Thermoplastic
Nylon

Clamp Nuts : Zinc-Plated Steel

Color : White

Face Material : Thermoplastic
Nylon

Ground Clips : Brass-Plated

Grounding Screw : Brass 8-32

Line Contacts : Brass Triple-
Wipe

Strap Material : Zinc-Plated
Steel

Terminal Screws : Brass 10-32

Mechanical Specifications

Product ID : Ratings are
permanently marked on device

Screw Terminal Torque : 14-
18 in-lbs

Terminal Accom. : 14-10 AWG

Terminal ID : Brass-Hot,
Green-Ground, Silver-Neutral

Product Features

Color : White

Device Type : Single
Receptacle Outlet

Feature : Tamper-
Resistant|Smooth Face

Grade : Commercial
Specification Grade

NEMA : 5-15R

Termination : Back and Side Wire

Standards and Certifications

ANSI : C-73

CSA C22.2 No. 42 : File 152105


NEMA : WD-6

NOM : 057

UL498 : File E13399

Warranty : 10-Year Limited

Wiring Diagram

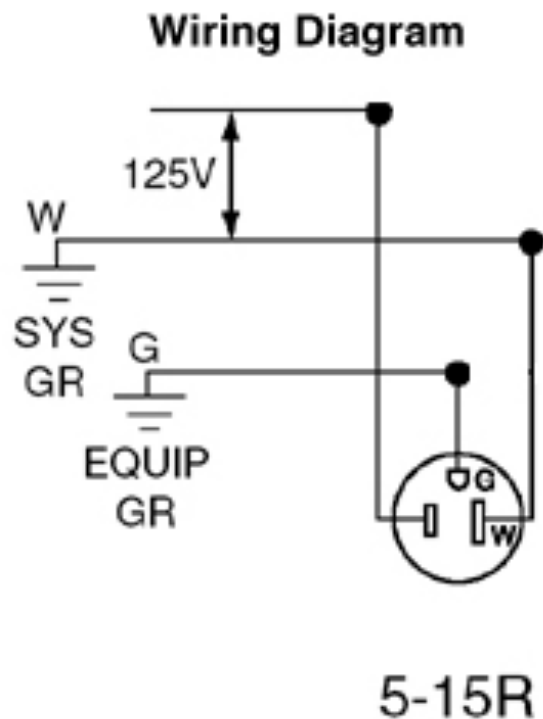

SPECIFICATION SUBMITTAL

JOB NAME: 	CATALOG NUMBERS:
JOB NUMBER: 	

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.
T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 ·
FAX: +1-800-824-3005 ·

Leviton S. de R.L. de C.V.

Data Sheet 4

Customer:	Johnston Construction
Reference:	Charles County Pomonkey Pump Station Improvements
Date:	04/16/2026
<u>Qty</u>	<u>Description</u>
1	Mfg: Schneider Electric: Relay, SP4T, 120VAC, 15A Model Number: RPM42F7 Tags/Service: CR3213 / UPS Panel Specifications: • 120VAC 50/60Hz control circuit voltage • 15A rated operational current • 4 C/O contact composition • With status LED and lockable test button • 15A load current at 250VAC • 100000 cycle resistive electrical durability
1	Mfg: Schneider Electric: Miniature Relay Socket, 120VAC, DIN Model Number: RPZF4 Tags/Service: CR3213 / UPS Panel Specifications: • <250 VAC UL rated operational voltage • 16A conventional free air thermal current • 4 C/O contact composition

TAGS: CR3213



plug-in relay, Harmony
electromechanical relays, 15A, 4CO,
with LED, lockable test button, 120V
AC

RPM42F7

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony Electromechanical Relays
Series name	RPM series
Product or Component Type	Plug-in relay
Contacts type and composition	4 C/O
Relay Type	Power relay
Status LED	With
[Uc] control circuit voltage	120 V AC 50/60 Hz
Minimum switching capacity	170 mW 10 mA, 17 V
Release time	20 ms at nominal voltage
Ambient air temperature for operation	-40...131 °F (-40...55 °C)
[Ithe] conventional enclosed thermal current	15 A -40...131 °F (-40...55 °C)

Complementary

Control Type	Lockable test button
[Ie] rated operational current	15 A 277 V AC) UL 15 A 28 V-DG) UL 15 A 250 V-AC) NO-IEC 15 A 28 V-DG) NO-IEC 7.5 A 250 V-AC) NC-IEC 7.5 A 28 V-DG) NC-IEC ₁
Degree of protection (Housing only)	IP40 conforming to IEC 60529
Rated operational voltage limits	96...132 V AC
[Ui] rated insulation voltage	250 V-IEC 300 V-CSA 300 V UL
Maximum switching voltage	250 V IEC
Drop-out voltage threshold	>= 0.15 Uc AC
Average resistance	2100 Ohm at 68 °F (20 °C) +/- 15 %
Maximum switching capacity	3750 VA 420 W
Load current	15 A 250 V AC 15 A 28 V-DG ₁
Operating time	20 ms at nominal voltage
Mechanical durability	10000000 cycles

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Electrical durability	100000 cycles resistive
Safety reliability data	B10d = 100000
Operating rate	<= 1200 cycles/hour under load <= 18000 cycles/hour no-load
Utilisation coefficient	20 %
Dielectric strength	1500 V AC between contacts with micro disconnection 2000 V AC between coil and contact with reinforced 2000 V AC between poles with basic
[Uimp] rated impulse withstand voltage	4 kV 1.2/50 µs
Protection category	RT I
Mounting Support	Plug-in
Operating position	Any position
Test levels	Level A group mounting
Device presentation	Complete product
Contacts material	AgNi
Shape of pin	Flat (faston type)
Net Weight	0.157 lb(US) (0.071 kg)

Environment

Average coil consumption in VA	2.5 60 Hz
Pollution degree	3
Standards	CSA C22.2 No 14 UL 508 IEC 61810-1
Product Certifications	UL EAC CSA
Ambient Air Temperature for Storage	-40...185 °F (-40...85 °C)
Vibration resistance	3 gn +/- 1 mm 10...150 Hz)5 cycles in operation 5 gn +/- 1 mm 10...150 Hz)5 cycles not operating
Shock resistance	15 gnin operation 30 gnnot operating

Ordering and shipping details

Category	US10CP221127
Discount Schedule	0CP2
GTIN	3389119402248
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.063 in (2.700 cm)
Package 1 Width	1.575 in (4.000 cm)
Package 1 Length	1.850 in (4.700 cm)



socket, Harmony Electromechanical Relays, for RPM4 power relays, 16A screw clamp terminals, mixed contact

RPZF4

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony Electromechanical Relays
Device short name	RPZ
Product or Component Type	Socket
Product compatibility	Plug-in relay RPM 4 C/O
Contacts type and composition	4 C/O
[Ith] conventional free air thermal current	16 A
[Ue] rated operational voltage	< 250 V

Complementary

Shape of pin	Flat
Contact terminal arrangement	Mixed
Tightening torque	< 1 N.m M3.5
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
[Uimp] rated impulse withstand voltage	4 kV
Overvoltage category	III
Pollution degree	3
Sale per indivisible quantity	10
Width	2.0 in (50 mm)
Net Weight	0.207 lb(US) (0.094 kg)

Environment

Connections - terminals	- screw clamp terminals, flexible with cable end 1 x 0.5...1 x 2.5 mm² / AWG 20...AWG 14 - screw clamp terminals, solid without cable end 1 x 0.5...1 x 1.5 mm² / AWG 20...AWG 16 - screw clamp terminals, flexible with cable end 2 x 0.5...2 x 2.5 mm² / AWG 20...AWG 14 - screw clamp terminals, solid without cable end 2 x 0.5...2 x 1.5 mm² / AWG 20...AWG 16
IP degree of protection	IP20 conforming to IEC 60529
Dielectric strength	2500 V
Standards	IEC 61984
Product Certifications	UL CSA

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Data Sheet 5

Customer:	Johnston Construction												
Reference:	Charles County Pomonkey Pump Station Improvements												
Date:	04/16/2026												
<u>Qty</u>	<u>Description</u>												
1	Mfg: APC: Uninterruptible Power Supply Model Number: SRT1000XLA Tags/Service: UPS / UPS Panel Specifications: • 120VAC single phase main input voltage • NEMA 5-15P receptacle input connection type • 40-70Hz auto-sensing input frequency • 120VAC single phase main output voltage • 1000VA rated power • 6 NEMA 5-15R receptacle outputs • Built-in bypass • On-line UPS, sine wave waveform type <u>PWS load calculations</u> <table><tr><td>Description</td><td>Power Draw (W)</td></tr><tr><td>Ethernet Switch</td><td>1</td></tr><tr><td>Modem</td><td>1</td></tr><tr><td>OIT</td><td>17</td></tr><tr><td>Level Display</td><td>24</td></tr><tr><td>Total Power Draw</td><td>43</td></tr></table>	Description	Power Draw (W)	Ethernet Switch	1	Modem	1	OIT	17	Level Display	24	Total Power Draw	43
Description	Power Draw (W)												
Ethernet Switch	1												
Modem	1												
OIT	17												
Level Display	24												
Total Power Draw	43												

	- Total power draw = $(43W) * \frac{569VA}{480W} * 1.25$ safety factor = 63.72VA. <u>UPS load calculations</u> <table> <tr> <th>Description</th><th>Power Draw (VA)</th></tr> <tr> <td>24VDC Power Supply</td><td>63.72</td></tr> <tr> <td>PLC</td><td>36</td></tr> <tr> <td>DO Card</td><td>3.6</td></tr> <tr> <td>Modem</td><td>1</td></tr> <tr> <td>Transmitters (x2)</td><td>34</td></tr> <tr> <td>Total Power Draw</td><td>138.32</td></tr> </table> - Total power draw = $(138.32VA) * \frac{900W}{1000VA} = 124.488W$. At this load, with an additional battery pack, the UPS has a runtime of approximately 6 hours and 55 minutes.	Description	Power Draw (VA)	24VDC Power Supply	63.72	PLC	36	DO Card	3.6	Modem	1	Transmitters (x2)	34	Total Power Draw	138.32
Description	Power Draw (VA)														
24VDC Power Supply	63.72														
PLC	36														
DO Card	3.6														
Modem	1														
Transmitters (x2)	34														
Total Power Draw	138.32														
1	Mfg: APC: Dry Contact I/O Card Model Number: AP9614 Tags/Service: UPS / UPS Panel Specifications: 24VDC rated voltage - Self powered via UPS SmartSlot 0...200mA line rated current 0.522ft cable length														
1	Mfg: APC: UPS External Battery Pack Model Number: SRT48BP														

	Tags/Service: BP / UPS Panel Specifications: • External lead-acid battery pack • 2U rack unit size • Stand alone battery stack • 48VDC battery voltage • 2 replacement battery cartridges
--	---



APC Smart-UPS On-Line,
1000VA, Tower, 120V, 6x 5-15R
NEMA outlets, SmartSlot,
Extended runtime, W/O rail kit

SRT1000XLA

Overview

Presentation	High density, double-conversion on-line power protection with scalable runtime.
Lead time	Usually in Stock

Main

Main Input Voltage	120 V AC 1 phase
Input Connection Type	NEMA 5-15P
Efficiency at full load	50...150 V 40% load 80...150 V
Input Frequency	40 - 70 Hz auto-sensing
Output voltage	120 V 1 phase
Rated power in W	900 W
rated power in VA	1000 VA
output connection type	6 NEMA 5-15R
Bypass type	Built-in Bypass
Crest factor	3 : 1
Harmonic distortion	Less than 2%
Maximum configurable power in VA	1000 VA
Max Configurable Power (Watts)	900 W
Topology	On-Line
Waveform Type	Sine wave
Output Frequency (sync to mains)	50/60 Hz +/- 3 Hz sync to mains
Replacement battery	APCRBC155

Graphs

Run Time	View Runtime Graph
Efficiency	View Efficiency Graph

Complementary

Battery Size	Lead-acid internal included
Emergency Power Off (EPO)	Yes
Free slots	1
Alarm	Audible and visible alarms : prioritized by severity

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

UPS connectivity	Serial port USB port
Surge energy rating	432 J
Cable length	5.9 ft (1.8 m)
Number of cables	1
color	Black
Height	17.008 in (432 mm)
Width	3.3 in (85 mm)
Depth	20 in (508 mm)
Net Weight	48.5 lb(US) (22 kg)
Mounting preference	No preference
Mounting Mode	Tower
Two post mountable	0
USB compatible	Yes
Mounting position	Vertical
Mounting mode	Tower
Provided equipment	CD with software Communication Cable Documentation CD Installation guide Removable support feet USB cable Warranty card
Number of power module filled slots	0
Number of power module free slots	0
Additional specification	High density
Redundant	No
Range of Product	Smart-UPS On-Line
Product or Component Type	Uninterruptible power supply (UPS)

Environment

Product Certifications	ENERGY STAR V2.0 (USA)
Ambient Air Temperature for Operation	32...104 °F (0...40 °C)
Ambient Air Temperature for Storage	-4...122 °F (-20...50 °C)
Storage altitude	0...50000 ft (0...15240 m)
IP degree of protection	IP20
Relative Humidity	0...95 % non-condensing
Storage Relative Humidity	0...95 % non-condensing
Acoustic level	50 dBA
Online Thermal Dissipation	317 Btu/h
Operating altitude	0...10000 ft

Batteries & Runtime

Battery Type	Lead-Acid battery
--------------	-------------------

Battery Voltage	48V
Extendable Run Time	1
Included Battery Modules	0
Battery Slots Empty	0
Typical recharge time	3 h
RBC Quantity	1
Battery Life	3...5 year(s)
Battery Charge Power (Watts)	102 W rated

Ordering and shipping details

GTIN	731304329985
------	--------------

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	9.6 in (24.5 cm)
Package 1 Width	27.2 in (69.0 cm)
Package 1 Length	23.4 in (59.5 cm)
Package weight(Lbs)	71.83 lb(US) (32.58 kg)

Contractual warranty

Warranty (in months)	24 Battery 36 UPS
----------------------	-------------------

TAGS: UPS



Dry contact, Management Options, Dry Contact I/O Card, monitor external UPS environmental sensors, output relays, and input contacts

AP9614

Product availability: Non-Stock - Not normally stocked in distribution facility

Overview

Lead time	Usually in Stock
-----------	------------------

Main

Range of Product	Management Options and Cables
Provided Equipment	User Manual USB cable
Product or Component Type	Dry contact
Number of rack unit	0U
Cable length	0.522 ft (0.159 m)
Rated voltage	24 V
Line Rated Current	0...200 mA

General

Power supply type	Self powered via SmartSlot
-------------------	----------------------------

Physical

Height	1.5 in (3.8 cm)
Width	4.8 in (12.1 cm)
Depth	5.04 in (12.8 cm)
Net Weight	0.44 lb(US) (0.20 kg)
Mounting Mode	Not rack-mountable

Conformance

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Standards	EN 55022 Class A EN 55024 EN 61000-3-2 EN 61000-3-3 EN 61000-4-2 EN 61000-4-3 EN 61000-4-4 EN 61000-4-6 FCC Part 15 class A FCC CFR 47 part 15 EN 61000-6-3 (2007) BS EN 61000-6-3 EN 55032 BS EN 55032 VCCI class A CISPR 32 EN/IEC 61000-3-2 AS/NZS CISPR 32 EN 61000-6-1 (2007) EN 55035 BS EN 55024 IEC 62040-2 BS EN 62040-2 EN 61326-2 BS EN 61326-2 BS EN 61000-4-2 BS EN 61000-4-3 BS EN 61000-4-4 EN 61000-4-5 BS EN 61000-4-5 BS EN 61000-4-6 EN 61000-4-8 BS EN 61000-4-8 EN 61000-4-11 BS EN 61000-4-11 BS EN 55035 EN 62040-2 ICES-003 class A EN 61000-6-3 BS EN 61000-3-2 BS EN 61000-3-3 AS/NZS EN 61000-3-2:2023 AS/NZS EN 61000-3-3:2023
-----------	--

Environmental

Ambient Air Temperature for Operation	32...104 °F (0...40 °C)
Operating altitude	0...10000 ft 0...50000 ft
Ambient Air Temperature for Storage	5...149 °F (-15...65 °C)
Storage altitude	0...50000 ft (0...15240 m)

Ordering and shipping details

GTIN	731304733065
------	--------------

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.008 in (5.1 cm)
Package 1 Width	6.5 in (16.5 cm)
Package 1 Length	9.4 in (23.8 cm)
Package weight(Lbs)	15.5 oz (440 g)

Product data sheet

Specifications



APC Smart-UPS SRT 48V 1kVA 1.5kVA Battery Pack

SRT48BP

Overview

Lead time	Usually in Stock
-----------	------------------

Main

Product or Component Type	External battery pack
Number of rack unit	2U
Battery Type	Lead-Acid battery
Provided Equipment	Documentation CD Installation guide
Range of Product	Smart-UPS Battery Systems

Batteries & Runtime

Battery Slots Empty	0
Included Battery Modules	0
Device mounting	Stand alone battery stack
Battery Voltage	48V
RBC Quantity	2
Replacement battery	APCRBC155

Physical

Color	Black
Height	17.008 in (432 mm)
Width	3.3 in (85 mm)
Depth	21.1 in (536 mm)
Net Weight	65.9 lb(US) (29.9 kg)
Mounting Mode	Rack-mounted with kit

Output

Battery Capacity	11 Ah
------------------	-------

Environmental

Ambient Air Temperature for Operation	32...104 °F (0...40 °C)
Operating altitude	0...10000 ft
Relative Humidity	0...95 % non-condensing

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Ambient Air Temperature for Storage	5...113 °F (-15...45 °C)
Storage altitude	0...50000 ft (0...15240 m)
Storage Relative Humidity	0...95 % non-condensing

Ordering and shipping details

GTIN	731304330141
------	--------------

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	9.646 in (24.500 cm)
Package 1 Width	29.134 in (74.000 cm)
Package 1 Length	23.425 in (59.500 cm)
Package weight(Lbs)	83.335 lb(US) (37.800 kg)
Unit Type of Package 2	P06
Number of Units in Package 2	2
Package 2 Height	25.591 in (65.000 cm)
Package 2 Width	23.622 in (60.000 cm)
Package 2 Length	31.496 in (80.000 cm)
Package 2 Weight	179.897 lb(US) (81.600 kg)


Contractual warranty

Warranty (in months)	24
----------------------	----

Runtime: SRT1000XLA

APC Smart-UPS On-Line, 1000VA, Tower, 120V, 6x 5-15R NEMA outlets, SmartSlot, Extended runtime, W/O rail kit

APC Smart-UPS On-Line

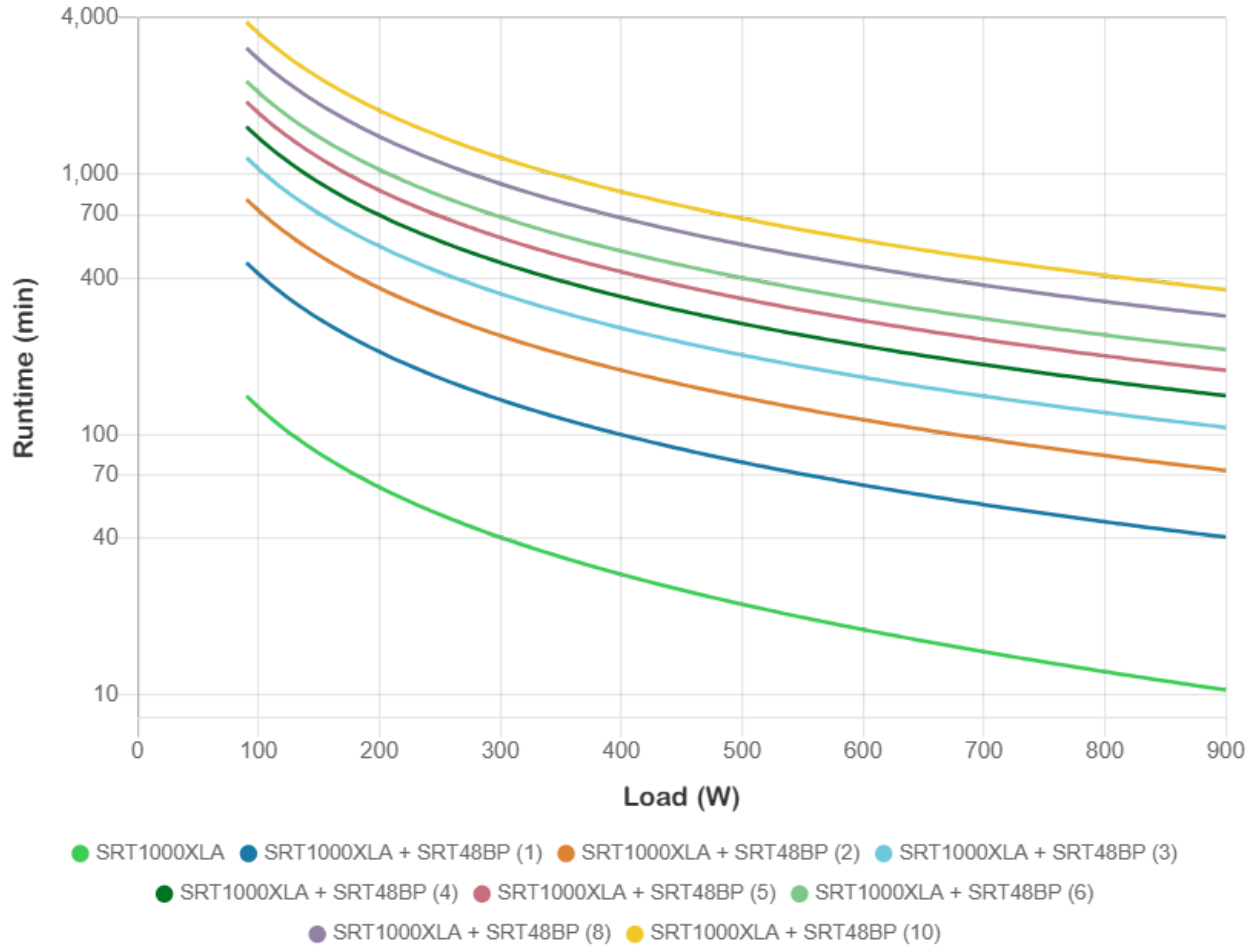

Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

Load / Runtime	90 W	100 W	200 W	300 W	400 W	500 W	600 W	700 W	800 W	900 W
SRT1000XLA	2 h 21 min	2 h 7 min	1 h 2 min	40 min	29 min 7 sec	22 min 21 sec	17 min 52 sec	14 min 41 sec	12 min 19 sec	10 min 29 sec
1x SRT1000XLA	7 h 39 min	6 h 55 min	3 h 28 min	2 h 16 min	1 h 40 min	1 h 18 min	1 h 4 min	53 min	46 min	40 min
1x SRT48BP										
4x SRT1000XLA	13 h 24 min	12 h 7 min	6 h 6 min	4 h	2 h 57 min	2 h 19 min	1 h 54 min	1 h 36 min	1 h 23 min	1 h 13 min
2x SRT48BP										
1x SRT1000XLA	19 h 21 min	17 h 31 min	8 h 50 min	5 h 48 min	4 h 17 min	3 h 22 min	2 h 46 min	2 h 20 min	2 h 1 min	1 h 46 min
3x SRT48BP										
1x SRT1000XLA	25 h 28 min	23 h 4 min	11 h 38 min	7 h 39 min	5 h 39 min	4 h 27 min	3 h 39 min	3 h 6 min	2 h 40 min	2 h 21 min
4x SRT48BP										
1x SRT1000XLA	31 h 43 min	28 h 43 min	14 h 29 min	9 h 32 min	7 h 3 min	5 h 33 min	4 h 34 min	3 h 52 min	3 h 21 min	2 h 56 min
5x SRT48BP										
1x SRT1000XLA	38 h 4 min	34 h 28 min	17 h 24 min	11 h 27 min	8 h 28 min	6 h 41 min	5 h 29 min	4 h 39 min	4 h 1 min	3 h 32 min
6x SRT48BP										
1x SRT1000XLA	51 h 1 min	46 h 12 min	23 h 20 min	15 h 22 min	11 h 22 min	8 h 58 min	7 h 23 min	6 h 15 min	5 h 25 min	4 h 46 min
8x SRT48BP										
1x SRT1000XLA	64 h 14 min	58 h 10 min	29 h 23 min	19 h 21 min	14 h 19 min	11 h 18 min	9 h 18 min	7 h 53 min	6 h 50 min	6 h 1 min
10x SRT48BP										

<https://www.se.com/us/en/products-runtime-graph/SRT1000XLA/apc-smartups-online-1000va-tower-120v-6x-515r-nema-outlets-smartslot-extended-runtime-w-o-rail-kit/>

Data Sheet 6

Customer:	Johnston Construction
Reference:	Charles County Pomonkey Pump Station Improvements
Date:	04/16/2026
<u>Qty</u>	<u>Description</u>
1	Mfg: SCE: Enclosure Heater Model Number: SCE-TSH50 Tags/Service: HTR3203 / UPS Panel Specifications: • For protection from condensation • Positive temperature coefficient application • 35mm DIN rail clip for mounting • Touch safe heater, with 2 screw terminals for standard AWG 14 wire



ENCLOSURE HEATER

TAGS: HTR3203

Saginaw Control and Engineering
 95 Midland Road Saginaw, MI 48638-5770
 (800) 234-6871 - Fax: (989) 799-4524
 SCE@SaginawControl.com

SCE-TSH50

Product Specifications:



Part Number: SCE-TSH50
Description: Heater - 50W
Height: 4.92"
Width: 1.61"
Depth: 1.61"
Price Code: P1
List Price: \$142.60
Catalog Page: 402
Est. Ship Weight: 0.35 lbs
Max. Current : 3.5
Model Number: 501050

Application

PTC (Positive Temperature Coefficient)
 Din rail clip design for 35mm Din Rail. Designed for protection from low temperatures, condensation and corrosion. Touch Safe with 2 screw terminal for standard AWG 14 wire. 110-240V AC.

For low temperatures management use with thermostat

For condensate management no thermostat is necessary - continuous heat is most effective see installaton Instruction for sizing.

Industry Standards - (IS24)

✳ UL Component Recognized

Notes

UL File #E358386

Optional Accessories

SCE-TEMD Thermostat (Dual)
 SCE-TEMNC Thermostat (Normally Closed)

Similar Part Numbers

SCE-TSH100Heater - 100W
 SCE-TSH150Heater - 150W
 SCE-TSH25Heater - 25W
 SCE-TSH75Heater - 75W

Installation Information

✳ Touch Safe Heaters

Data Sheet 7

Customer:	Johnston Construction
Reference:	Charles County Pomonkey Pump Station Improvements
Date:	04/16/2026
<u>Qty</u>	<u>Description</u>
1	Mfg: Finder: Enclosure Heater Thermostat, NC Model Number: 7T.81.0.000.2403 Tags/Service: THERMOSTAT / UPS Panel Specifications: • 1 NC SPST contact configuration • 10A rated current, 20A maximum peak current • 0.3A breaking capacity at 110VAC • Silver Nickel standard contact material • 0...60°C setting range • 7±4K switch differential • 100 * 10¹³ cycle electrical life at 2500VA load • IP20 protection category • -45...80°C ambient temperature range



TAGS: THERMOSTAT

Panel Thermo-Hygrostat and Thermostats

7T
SERIES



Drying kilns



Industrial refrigeration



Road / tunnel lighting



Industrial furnaces and ovens



Automatic car-washes



Panels for electrical distribution



Control panels



Forced-air ventilators



Panel Thermo-Hygrostat

- Small, compact size (17.5 mm wide)
- Electronic control
- 4 functions
- Nominal voltage 110...240 V AC/DC
- Temperature ranges from +10 ° to +60°C
- Humidity range up to 90%
- LED status indication contact ON
- 35 mm rail (EN 60715) mount

Panel thermostat

- Small, compact size (17.5 mm wide)
- Snap action thermostatic Bimetal sensor
- Wide temperature setting range
- Long electrical life
- 35 mm rail (EN 60715) mount

7T.51/7T.81
Box clamp



* Measured with 0.3 K/min
** Measured with 0.5 %/min

For outline drawing see page 6

Contact specification

Contact configuration	1 NO (SPST-NO)	1 NC (SPST-NC)	1 NO (SPST-NO)
Rated current/Maximum peak current	A	10/15	10/20
Rated voltage/ Maximum switching voltage	V AC	250/400	250/250
Rated load AC1	VA	2500	2500
Rated load AC15 (230 V AC)	VA	500	250
Single phase motor rating AC3 (230 V AC)	kW	—	1.1
Breaking capacity DC1: 24/110/220 V	A	10/0.3/0.12	1/0.3/0.15
Minimum switching load	mW (V/mA)	500 (12/10)	500 (12/10)
Standard contact material	AgNi	AgNi	AgNi

Coil specifications

Nominal Voltage	V AC/DC	110...240	—	—
Rated Power	VA (50Hz)/W	1.8/0.44	—	—
Operating range	V AC/DC	88...264	—	—

Temperature specifications *

Setting range (ventilation)	°C	+10...+60	-20...+40 -20...+60 0...+60	-20...+40 -20...+60 0...+60
Switch differential	K	4 ± 2	7 ± 4	7 ± 4
Setting accuracy full range	K	-1...+3	—	—

Humidity specifications **

Setting range (humidity)	%	50...90	—	—
Hysteresis	%	4 ± 2	—	—
Setting accuracy	%	5	—	—

Technical data

Electrical life at rated load AC1	cycles	100 · 10 ³	100 · 10 ³	100 · 10 ³
Ambient temperature range	°C	-25...+60	-45...+80	-45...+80
Protection category		IP 20	IP 20	IP 20

Approvals (according to type)

NEW 7T.51



- Thermo-Hygrostatic control
- Nominal voltage 110...240 V AC/DC

7T.81.0.000.240x



- Heating control


7T.81.0.000.230x



- Ventilation control

Ordering information


Example: 7T Series, Thermo-Hygrostat for temperature and humidity control, 110...240 V AC/DC, Multifunction, 35 mm rail (EN 60715) mount.

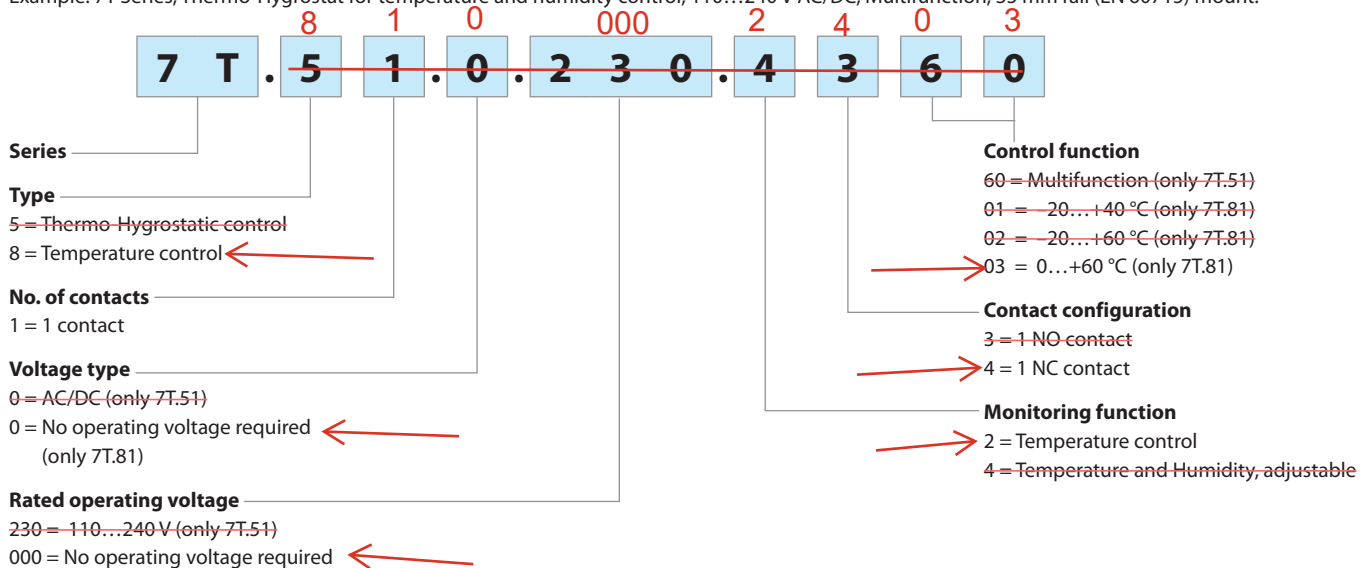

Technical data

Insulation		7T.51	7T.81
Dielectric strength between open contacts	V AC	1000	500
Dielectric strength between supply and contact	V AC	2000	—
Other data		7T.51	7T.81
Vibration resistance	g	—	16
Shock resistance	g	—	20
		7T.51/7T.81	
Screw torque	Nm	0.5	0.5
Max. wire size		solid cable	stranded cable
	mm ²	1 x 4 / 2 x 2.5	1 x 4 / 2 x 2.5
	AWG	1 x 12 / 2 x 14	1 x 12 / 2 x 14
Wire strip length	mm	9	9


Functions 7T.51

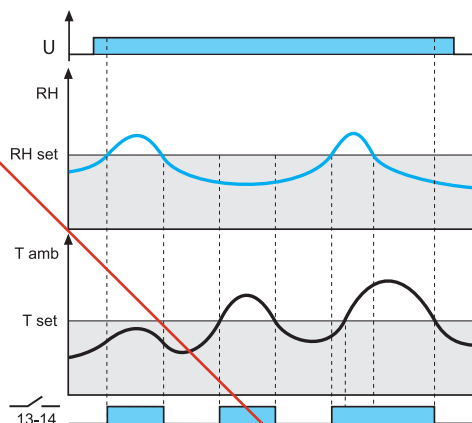

HT: $RH > RH_{set}$ or $T_{amb} > T_{set}$

Power is permanently applied to the thermo-hygrostat.
The contact 13-14 closes if the ambient humidity (RH) is $>$ of set humidity (RHset) or if the ambient temperature (Tamb) is $>$ of set temperature (Tset).


When contact is close, LED is ON

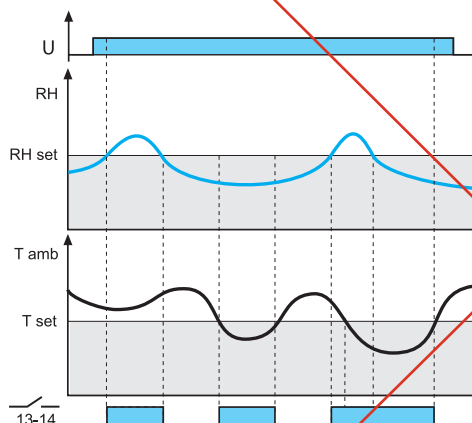

TH: $RH > RH_{set}$ or $T_{amb} < T_{set}$

The contact 13-14 closes if the ambient humidity (RH) is $>$ of set humidity (RHset) or if the ambient temperature (Tamb) is $<$ of set temperature (Tset).


When contact is close, LED is ON

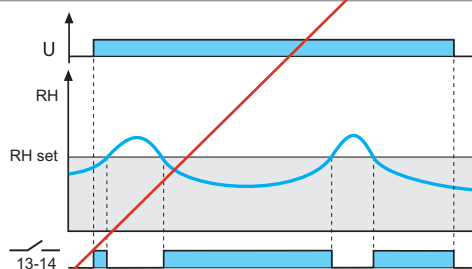

HL: $RH < RH_{set}$

The contact 13-14 closes if the ambient humidity (RH) is $<$ of set humidity (RHset)

When contact is close, LED is ON

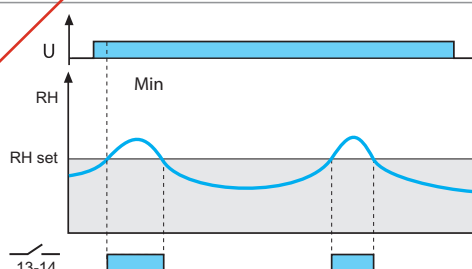





HM: $RH > RH_{set}$

The contact 13-14 closes if the ambient humidity (RH) is $>$ of set humidity (RHset)

When contact is close, LED is ON

G


Functions 7T.81



Heating control - Should the panel temperature fall below the (minimum) set temperature the contact will close to call for heat.
The contact will open when this set temperature is exceeded.


Ventilation control - Should the panel temperature exceed the (maximum) set temperature then the contact will close to call for cooling.
The contact will open when the temperature falls below this set temperature.

Wiring diagrams

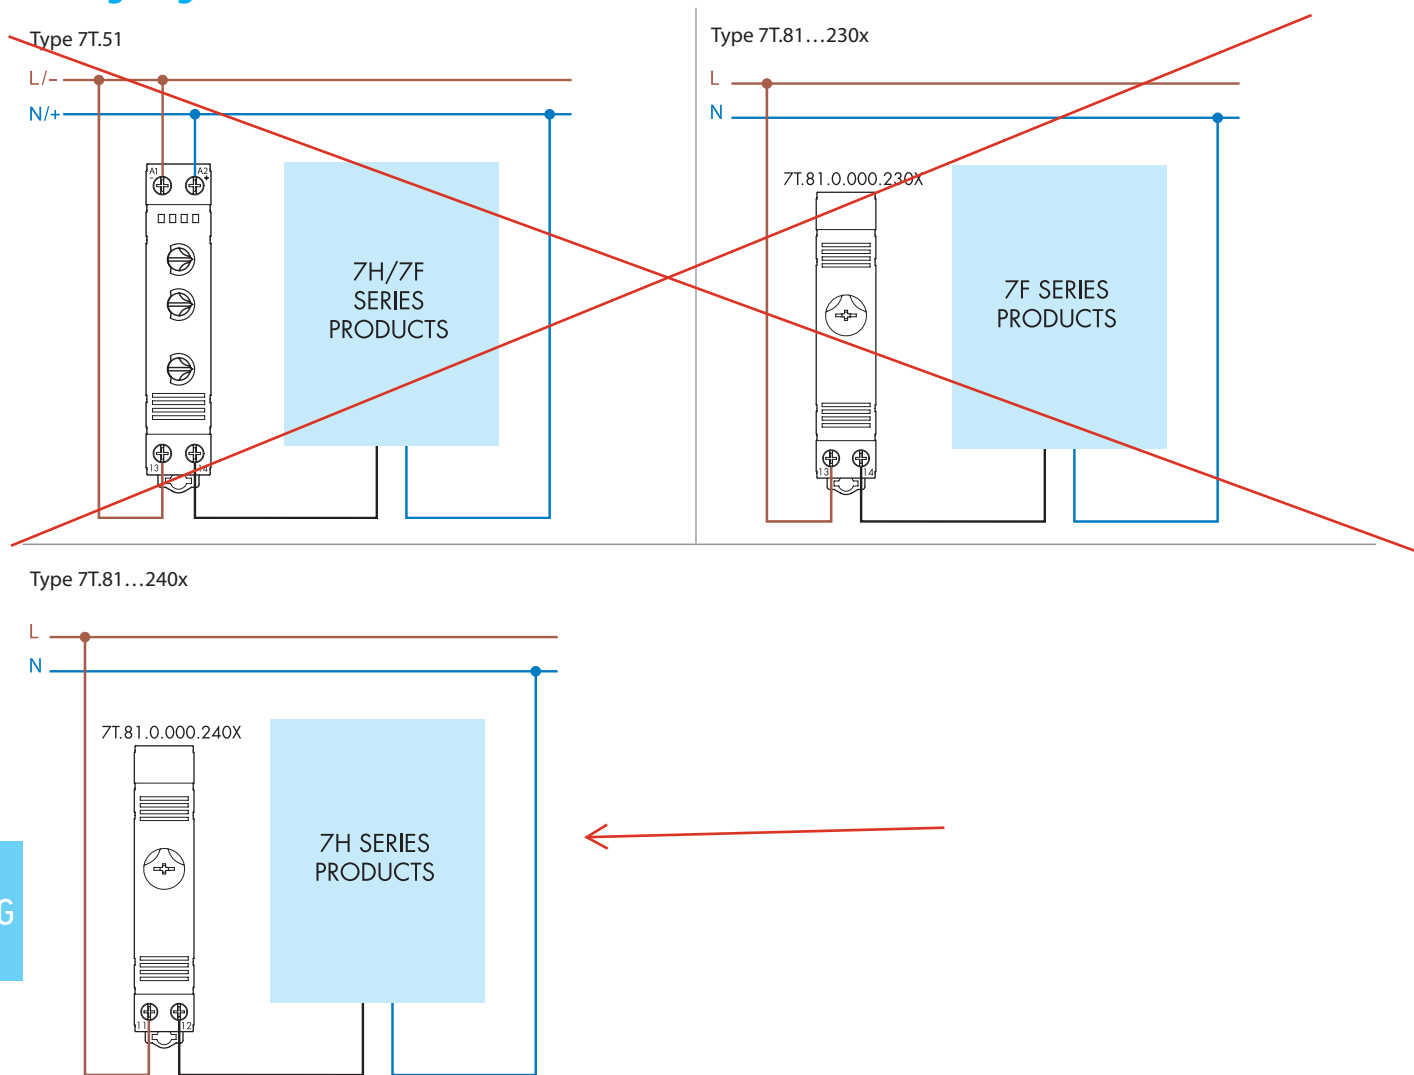


Outline drawings

Type 7T.51
Box clamp

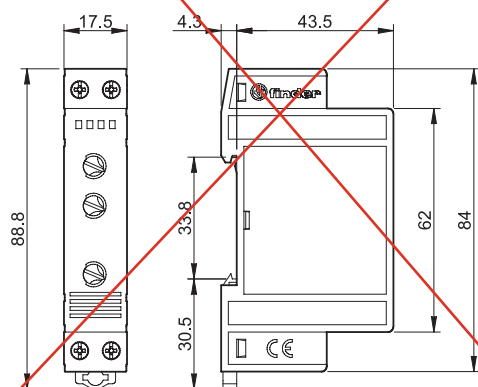

Type 7T.81
Box clamp

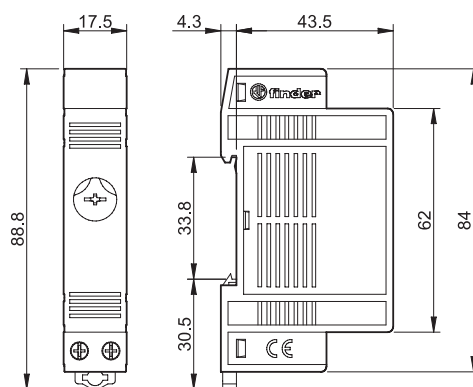

Data Sheet 8

Customer:	Johnston Construction
Reference:	Charles County Pomonkey Pump Station Improvements
Date:	04/16/2026
<u>Qty</u>	<u>Description</u>
A/R	Mfg: Phoenix Contact: Terminal Block Model Number: 3044076
A/R	Mfg: Phoenix Contact: Grounding Terminal Block Model Number: 3044092
A/R	Mfg: Phoenix Contact: Terminal End Barrier Model Number: 3047028
A/R	Mfg: Phoenix Contact: Terminal Anchor Model Number: 0800886 Tags / Service: TB-AC / UPS Panel Specifications: • Feed through and grounding terminals • Screw clamps • End plates and anchors • DIN rail mount

UT 2,5

Order No.: 3044076



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3044076>

Universal terminal block, Type of connection: Screw connection,
Screw connection, Cross section: 0.14 mm² - 4 mm², AWG 26 - 12,
Width: 5.2 mm, Color: gray, Mounting type: NS 35/7,5, NS 35/15



Commercial data	
EAN	4017918960377
Pack	50 pcs.
Customs tariff	85369010
Weight/Piece	0.008227 KG
Catalog page information	Page 26 (CL-2009)

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
General	
Number of levels	1
Number of connections	2
Color	gray

Insulating material	PA
Inflammability class acc. to UL 94	V0

Dimensions

Width	5.2 mm
Length	47.7 mm
Height NS 35/7,5	47.5 mm
Height NS 35/15	55 mm

Technical data

Maximum load current	32 A (with 4 mm ² conductor cross section)
Rated surge voltage	8 kV
Pollution degree	3
Surge voltage category	III
Insulating material group	I
Connection in acc. with standard	IEC 60947-7-1
Nominal current I _N	24 A
Nominal voltage U _N	1000 V
Open side panel	ja

Connection data

Conductor cross section solid min.	0.14 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.14 mm ²
Conductor cross section stranded max.	4 mm ²
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	12
Conductor cross section stranded, with ferrule without plastic sleeve min.	0.14 mm ²
Conductor cross section stranded, with ferrule without plastic sleeve max.	2.5 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve min.	0.14 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve max.	2.5 mm ²
2 conductors with same cross section, solid min.	0.14 mm ²
2 conductors with same cross section, solid max.	1.5 mm ²
2 conductors with same cross section, stranded min.	0.14 mm ²

2 conductors with same cross section, stranded max.	1.5 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min.	0.5 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	1.5 mm ²
2 conductors with same cross section, stranded, ferrules without plastic sleeve, min.	0.14 mm ²
2 conductors with same cross section, stranded, ferrules without plastic sleeve, max.	1.5 mm ²
Type of connection	Screw connection
Stripping length	9 mm
Internal cylindrical gage	A3
Screw thread	M3
Tightening torque, min	0.6 Nm
Tightening torque max	0.8 Nm

Certificates / Approvals



Certification

CB, CSA, CUL, DNV, GL, GOST, LR, UL, VDE-PZI

Certification Ex:

IECEX, KEMA-EX

CSA

Nominal voltage U_N	600 V
Nominal current I_N	20 A
AWG/kcmil	26-12

CUL


Nominal voltage U_N	600 V
Nominal current I_N	20 A
AWG/kcmil	26-12

UL

Nominal voltage U_N	600 V
Nominal current I_N	20 A
AWG/kcmil	26-12

UT 2,5-PE

Order No.: 3044092
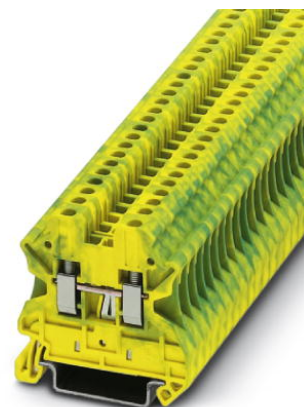
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3044092>

Feed-through modular terminal block, Type of connection: Screw connection, Screw connection, Cross section: 0.14 mm² - 4 mm², AWG 26 - 12, Width: 5.2 mm, Color: green-yellow, Mounting type: NS 35/7,5, NS 35/15



Commercial data

EAN	4017918960360
Pack	50 pcs.
Customs tariff	85369010
Weight/Piece	0.012156 KG
Catalog page information	Page 32 (CL-2009)

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General

Number of levels	1
Number of connections	2
Color	green-yellow

Insulating material	PA
Inflammability class acc. to UL 94	V0

Dimensions

Width	5.2 mm
Length	47.7 mm
Height NS 35/7,5	47.5 mm
Height NS 35/15	55 mm

Technical data

Rated surge voltage	8 kV
Pollution degree	3
Surge voltage category	III
Insulating material group	I
Connection in acc. with standard	IEC 60947-7-2
Open side panel	ja

Connection data

Conductor cross section solid min.	0.14 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.14 mm ²
Conductor cross section stranded max.	4 mm ²
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	12
Conductor cross section stranded, with ferrule without plastic sleeve min.	0.14 mm ²
Conductor cross section stranded, with ferrule without plastic sleeve max.	2.5 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve min.	0.14 mm ²
Conductor cross section stranded, with ferrule with plastic sleeve max.	2.5 mm ²
2 conductors with same cross section, solid min.	0.14 mm ²
2 conductors with same cross section, solid max.	1.5 mm ²
2 conductors with same cross section, stranded min.	0.14 mm ²
2 conductors with same cross section, stranded max.	1.5 mm ²

2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min.	0.5 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	1.5 mm ²
2 conductors with same cross section, stranded, ferrules without plastic sleeve, min.	0.14 mm ²
2 conductors with same cross section, stranded, ferrules without plastic sleeve, max.	1.5 mm ²
Type of connection	Screw connection
Stripping length	9 mm
Internal cylindrical gage	A3
Screw thread	M3
Tightening torque, min	0.6 Nm
Tightening torque max	0.8 Nm

Certificates / Approvals



Certification

CB, CSA, CUL, DNV, GL, LR, UL, VDE-PZI

Certification Ex:

IECEEx, KEMA-EX

CSA

AWG/kcmil	26-12
-----------	-------

CUL

AWG/kcmil	26-12
-----------	-------

UL

AWG/kcmil	26-12
-----------	-------

D-UT 2,5/10

Order No.: 3047028



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3047028>

End cover, Length: 47.7 mm, Width: 2.2 mm, Height: 48.4 mm,
Color: gray

Commercial data

EAN	4017918960346
Pack	50 pcs.
Customs tariff	85389099
Weight/Piece	0.00248 KG
Catalog page information	Page 26 (CL-2009)

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

E/NS 35 N - End bracket


0800886

<https://www.phoenixcontact.com/us/products/0800886>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

End clamp, width: 9.5 mm, color: gray



Your advantages

- Large-surface marking

Commercial data

Item number	0800886
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE07
Product key	BE7111
GTIN	4017918129309
Weight per piece (including packing)	14.16 g
Weight per piece (excluding packing)	13.708 g
Customs tariff number	39269097
Country of origin	DE

E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/us/products/0800886>




Technical data

Connection data

Screw thread	M3
Tightening torque	0.5 ... 0.8 Nm

Dimensions

Dimensional drawing	
Width	9.5 mm
Height	48.6 mm
Depth	32.8 mm
Depth on NS 35/7,5	34.3 mm
Length	48.6 mm

Material specifications

Color	gray (RAL 7042)
Material	PA
Flammability rating according to UL 94	V0
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Mounting

Mounting type	NS 35/7,5
	NS 35/15

E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/us/products/0800886>



Phoenix Contact 2026 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com

32384 CHARLES COUNTY POMONKEY PUMP STATION IMPROVEMENTS

Drawings Index:

Drawing Number	Drawing Description
D32384-30	POMONKEY PUMP STATION UPS PANEL ENCLOSURE EXT. LAYOUT
D32384-31	POMONKEY PUMP STATION UPS PANEL ENCLOSURE INT. LAYOUT
D32384-32	POMONKEY PUMP STATION UPS PANEL UPS WIRING DIAGRAM

**32384 CHARLES COUNTY POMONKEY PUMP STATION
IMPROVEMENTS**

Drawings:

WARNING NAMEPLATE DETAIL

S-L CONTROLS, DWG D32384-30
VOLTAGE: 120VAC, 60HZ, SINGLE PHASE
AMPS: 28.75

SHORT CIRCUIT CURRENT: N/A

ENCLOSURE RATING: UL TYPE 4X

CAUTION: MULTIPLE POWER SOURCES ARE PROVIDED FROM FIELD
TERMINALS. EACH SOURCE SHOULD BE DISCONNECTED FOR
SERVICING.

WARNING: - RISK OF ELECTRIC SHOCK - UPS EQUIPMENT
OUTPUTS REMAIN LIVE WITH MAIN DISCONNECT IN THE OFF
POSITION

WARNING: TO MAINTAIN OVERCURRENT, SHORT CIRCUIT, AND
GROUND FAULT PROTECTION, THE MANUFACTURER'S INSTRUCTIONS
FOR SELECTING CURRENT ELEMENTS MUST BE FOLLOWED

NAMEPLATES SIZED AS REQUIRED



NAME PLATE LEGEND TABLE

ITEM	QTY	DESCRIPTION
1	1	UPS CONTROL PANEL
2	1	120VAC 15 AMP / FOR UPS ONLY

NOTES:
ALL PLATES SHALL BE ENGRAVED ON WHITE BACKGROUND WITH
BLACK CHARACTERS. LETTER HEIGHT SHOULD BE MINIMUM 1/4"

WIRING:


- 1) □ - INDICATES CABINET TERMINAL BLOCK
- 2) DASHED LINES INDICATE WIRING REMOTE TO CONTROL PANEL.
- 3) PROVIDE 20% SPARE TERMINALS
- 4) UL APPROVED NO. TO BE PROVIDED AT TIME OF MANUFACTURING
- 5) ELECTRICAL CONNECTION TORQUES:
TERMINAL: 12 INCH POUNDS
CIRCUIT BREAKER: 20 INCH POUNDS

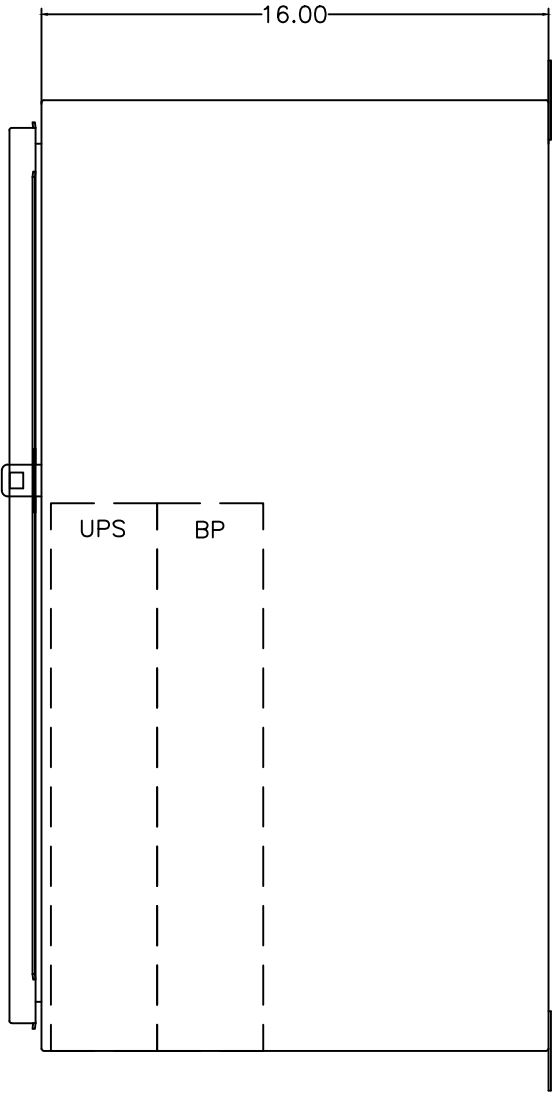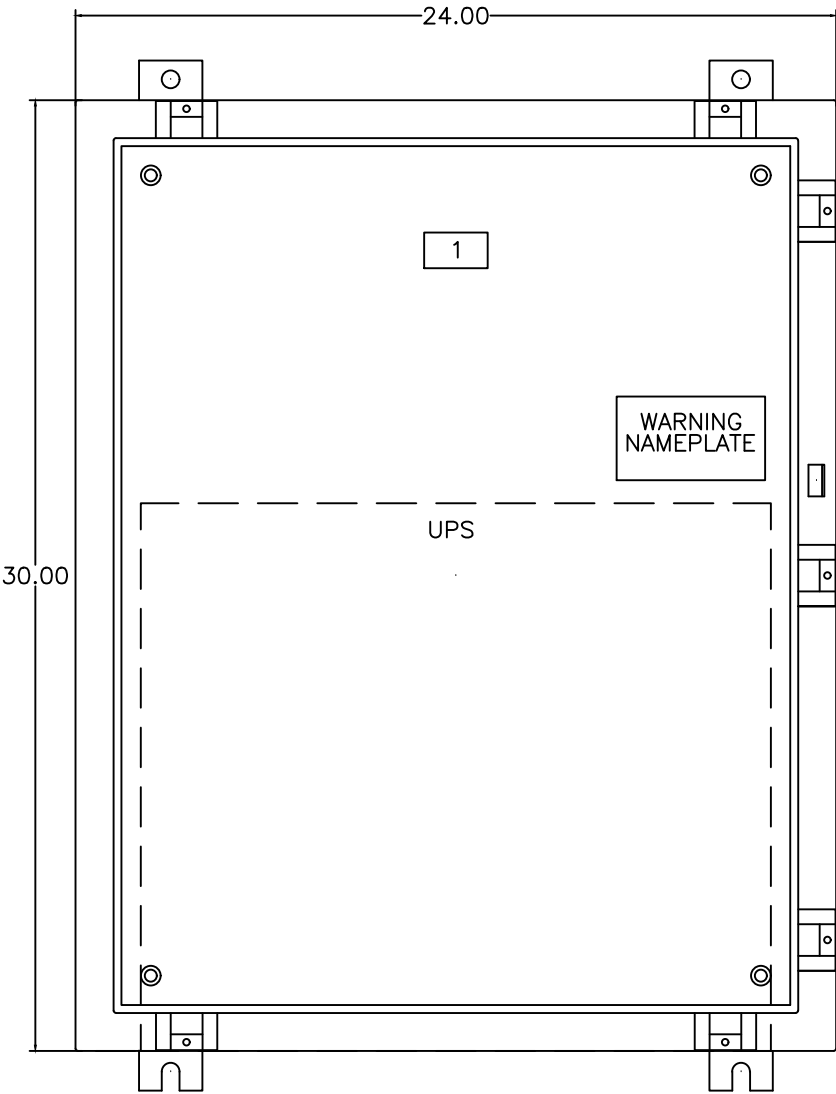

PANEL WIRING


AREA	VOLTAGE	NOUN NAME	ID	GAGE	COLOR	TYPE
INTERNAL	120VAC	HOT	(1), (1A), (X1)	14	BLACK	MTW
INTERNAL	120VAC	NEUTRAL	(N)	14	WHITE	MTW
CONTROL	120VAC	HOT	VARIOUS	16	RED	MTW
CONTROL	120VAC	NEUTRAL	N	16	WHITE	MTW
CONTROL	24VDC	DC+	VARIOUS	16	BLUE	MTW
CONTROL	24VDC	DC-	VARIOUS	16	WHT/BLU	MTW

TOLERANCES	REVISIONS			POMONKEY PUMP STATION UPS PANEL EXT. ENCLOSURE LAYOUT		
	NO.	DATE	BY			
DECIMAL	1					
	2					
FRACTIONAL	3			DRAWN BY ZBB	SCALE NONE	MATERIAL
	4					
ANGULAR	5			CHK'D MN	DATE 04-16-2026	DRAWING NUMBER D32384-30
	6					
				TRACED	APP'D	

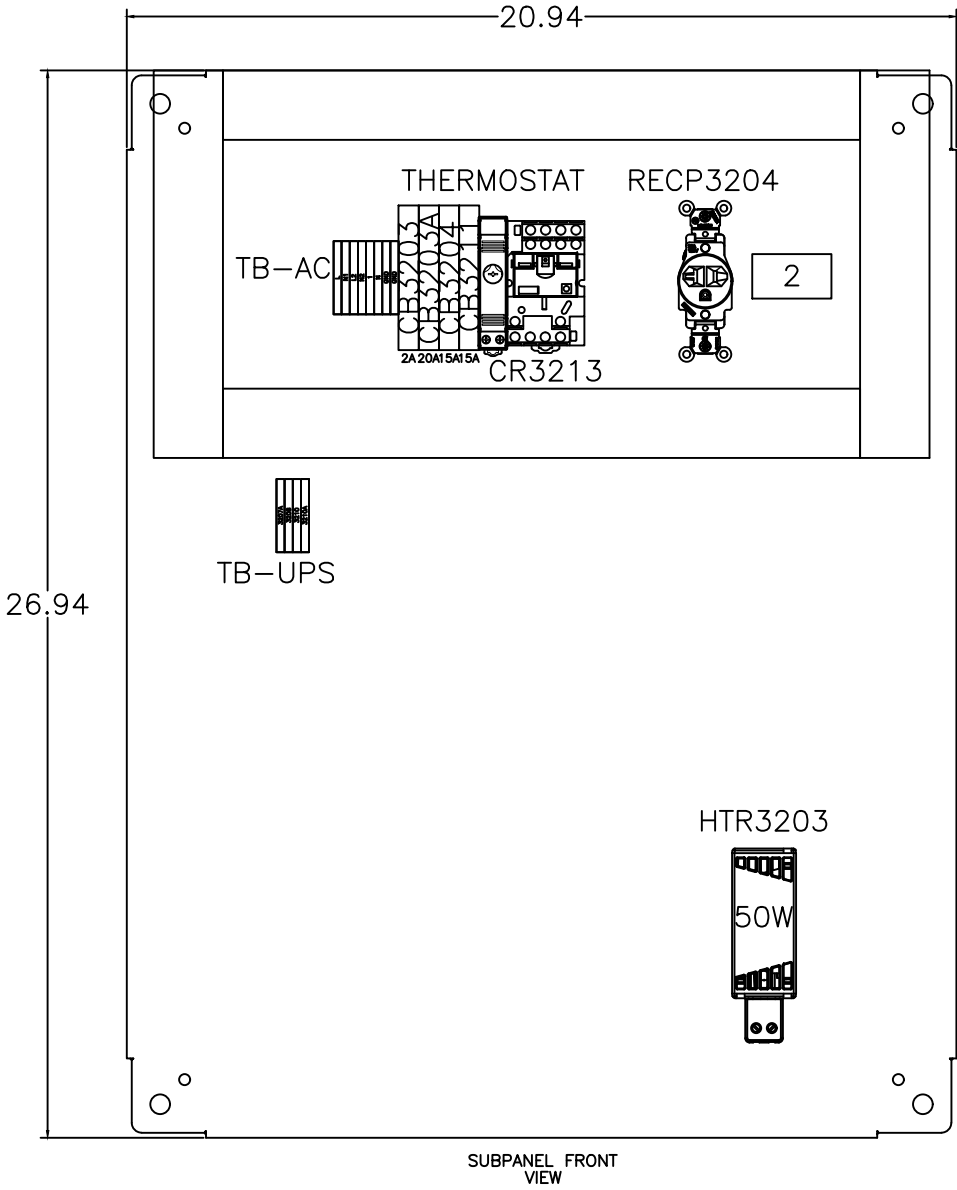

TAGS	QTY	CATALOG	DESCRIPTION	MANUFACTURER
ENC	1	SCE-30H2416SSLP	WALL MOUNT ENCLOSURE – NEMA 4X	SCE
ENC	1	SCE-30P24	ENCLOSURE BACKPANEL	SCE
CB3203	1	7940102572	CIRCUIT BREAKER, 120VAC, 2A	WEIDMULLER
CB3203A	1	7940102584	CIRCUIT BREAKER, 120VAC, 20A	WEIDMULLER
CB3204, CB3211	2	7940102582	CIRCUIT BREAKER, 120VAC, 15A	WEIDMULLER
RECP3204	1	T5015-W	SINGLE RECEPTACLE, 15A	LEVITON
CR3213	1	RPM42F7	RELAY, SP4T, 120VAC, 15A	SCHNEIDER ELECTRIC
CR3213	1	RPZF4	RELAY SOCKET, 120VAC, 14 BLADE, DIN	SCHNEIDER ELECTRIC
UPS	1	SRT1000XLA	UNINTERRUPTIBLE POWER SUPPLY	APC
UPS	1	AP9614	DRY CONTACT I/O CARD	APC
BP	1	SRT48BP	UPS EXTERNAL BATTERY PACK	APC
THERMOSTAT	1	7T.81.0.000.2403	ENCLOSURE HEATER THERMOSTAT, NC	FINDER
HTR3203	1	SCE-TSH50	ENCLOSURE HEATER	SCE
TB-AC, TB-UPS	12	3044076	UNIVERSAL TERMINAL BLOCK – UT 2,5	PHOENIX CONTACT
TB-AC, TB-UPS	A/R	3047028	TERMINAL END BARRIER	PHOENIX CONTACT
TB-AC, TB-UPS	A/R	3044092	GROUNDING TERMINAL BLOCK	PHOENIX CONTACT
TB-AC, TB-UPS	A/R	0800886	TERMINAL ANCHOR	PHOENIX CONTACT

TOLERANCES		REVISIONS			POMONKEY PUMP STATION UPS PANEL INT. PANEL LAYOUT		
		NO.	DATE	BY			
DECIMAL	1						
	2						
FRACTIONAL	3				DRAWN BY ZBB	SCALE NONE	MATERIAL
	4				CHK'D MN	DATE 04-16-2026	DRAWING NUMBER
ANGULAR	5				TRACED	APP'D	D32384-31
	6						

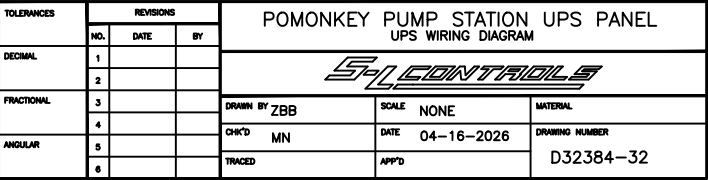

TOLERANCES	REVISIONS			POMONKEY PUMP STATION UPS PANEL		
	NO.	DATE	BY	UPS WIRING DIAGRAM		
DECIMAL	1					
	2					
FRACTIONAL	3			DRAWN BY ZBB		
	4			SCALE NONE		
ANGULAR	5			CHK'D MN	DATE 04-16-2026	DRAWING NUMBER
	6			TRACED	APP'D	D32384-32