403 Forbidden

本电子书由CyberArticle制作。点击这里下载CyberArticle。注册版本不会显示该信息。 删除广告

本电子书由CyberArticle制作。点击这里下载CyberArticle。注册版本不会显示该信息。 删除广告

本电子书由CyberArticle制作。点击这里下载CyberArticle。注册版本不会显示该信息。 删除广告

本电子书由CyberArticle制作。点击这里下载CyberArticle。注册版本不会显示该信息。 删除广告

本电子书由CyberArticle制作。点击这里下载CyberArticle。注册版本不会显示该信息。 删除广告

本电子书由CyberArticle制作。点击这里下载CyberArticle。注册版本不会显示该信息。 删除广告

V7交换机配置文件备份方法

目录

V7交换机配置文件备份方法 1

- 1 配置需求或说明 1
 - 1.1 适用产品系列 1
 - 1.2 配置需求 1
- 2 组网图 1
- 3 配置步骤 1
 - 3.1 WEB方式 1
 - 3.2 命令方式 2

1 配置需求或说明

1.1 适用产品系列

本案例适用于如 S5130-28F-WiNet、S5500V2-24P-WiNet、S5500V2-48P-WiNet等的V7交换机,V5、V7交换机具体分类及型号可以参考"1.1 Comware V5、V7平台交换机分类说明"。

1.2 配置需求

对设备执行配置操作后,建议及时保存当前配置,最好再把配置导出备份,以免配置丢失。

2组网图

无

3 配置步骤

3.1 **WEB**方式

- (1)在导航栏中选择"设备 > 配置文件"。
- (2)点击"导出当前配置",如图3-1所示的界面。
- (3)浏览器会提示"正在下载配置文件",如图3-2所示的界面。
- (4)浏览器提示"仍然要保留startup.cfg吗",点击"保留"即可

图3-1

保存当前配置	
查看当前配置 >	
恢复出厂配置 >	

图3-2


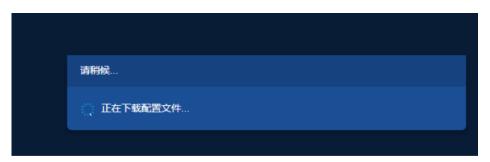


图3-3



3.2 命令方式

#首先保存设备配置

<H3C>save

The current configuration will be written to the device. Are Please input the file name(*.cfg)[flash:/startup.cfg]

(To leave the existing filename unchanged, press the enter ke Validating file. Please wait...

Saved the current configuration to mainboard device successfu 以上表明设备默认保存了一个starup.cfg的文件。

接下来通常都是搭建一个tftp服务器的方式把存到设备内存里的文件给下载下来,需要确保电脑跟设备能ping通。

<H3C> tftp 10.88.18.117 put backup.cfg

File will be transferred in binary mode

Sending file to remote TFTP server. Please wait... |

TFTP: 2287 bytes sent in 0 second(s).

File uploaded successfully.

其中的地址是您调试的终端电脑的地址。