A Multiplicative Value Function for Safe and Efficient Reinforcement Learning

Nick Bührer [1], Zhejun Zhang [1], Alexander Liniger [1], Fisher Yu [1], Luc Van Gool [1,2].

[1] Computer Vision Lab, ETH Zurich, Switzerland. [2] PSI, KU Leuven, Belgium.

OCTOBER 1 - 5, 2023

IEEE/RSJ International Conference on Intelligent Robots and Systems

Motivation



Environment with Constraints



Ground-Truth Value



Regular Value Function

- **Sharp discontinuities are hard to learn.**
- **Poor training stability and sample efficiency.**



Multiplicative Value Function

$=$



Probabilistic Safety Critic

$\otimes$



Constraint-Free Reward Critic

Method

Multiplicative Value/Q Function:

$$V^{\pi}_{\text{mult}}(s) = (\bar{V}^{\pi}(s) - \bar{v}_{min}) \cdot (1 - \Phi^{\pi}(s)) + \bar{v}_{min}$$

$$Q^{\pi}_{\text{mult}}(s,a) = (\bar{Q}^{\pi}(s,a) - \bar{q}_{min}) \cdot (1 - \Psi^{\pi}(s,a)) + \bar{q}_{min},$$

$$\bar{v}_{min} \coloneqq \min_{s} \bar{V}^{\pi}(s), \bar{q}_{min} \coloneqq \min_{s,a} \bar{Q}^{\pi}(s,a)$$

Multiplicative Advantage:

(V1) Bootstrap Q:

$$A^{\pi}_{\text{mult}}(s_t, a_t) = \left[\overline{r_t} + \gamma V^{\pi}_{\text{mult}}(s_{t+1})\right] - V^{\pi}_{\text{mult}}(s_t)$$

(V2) W/O bootstrap: $A^{\pi}_{\text{mult}}(s_t, a_t) = Q^{\pi}_{\text{mult}}(s_t, a_t) - V^{\pi}_{\text{mult}}(s_t)$

(V3) Bootstrap the safety critic inside $Q^{\pi}_{\text{mult}}(s_t, a_t)$:

$$(\bar{Q}^{\pi}(s_t, a_t) - \bar{q}_{min}) \cdot \left(1 - \left(r_{c,t} + \gamma_c \Phi^{\pi}(s_{t+1})\right)\right) + \bar{q}_{min}$$

Apply to SAC and PPO

SAC: $\max_{\theta} \mathbb{E}_{a_\theta \sim \pi_\theta}\left[Q^{\pi_\theta}_{\text{mult}}(s, a_\theta) - \alpha \log \pi_\theta(s_\theta | x)\right]$

PPO: $\max_{\theta} \mathbb{E}_{a \sim \pi_\theta}\left[\min\left\{\frac{\pi_\theta(a|s)}{\pi_{\theta_k}(a|s)} A^{\pi_{\theta_k}}_{\text{mult}}(s,a), g\left(\epsilon, A^{\pi_{\theta_k}}_{\text{mult}}(s,a)\right)\right\}\right]$

Results

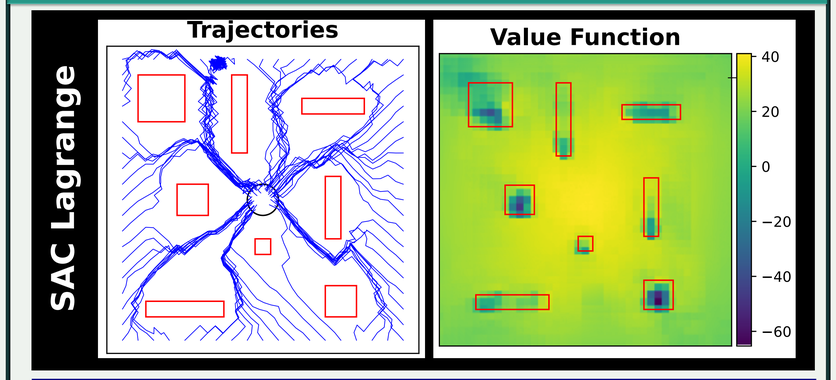

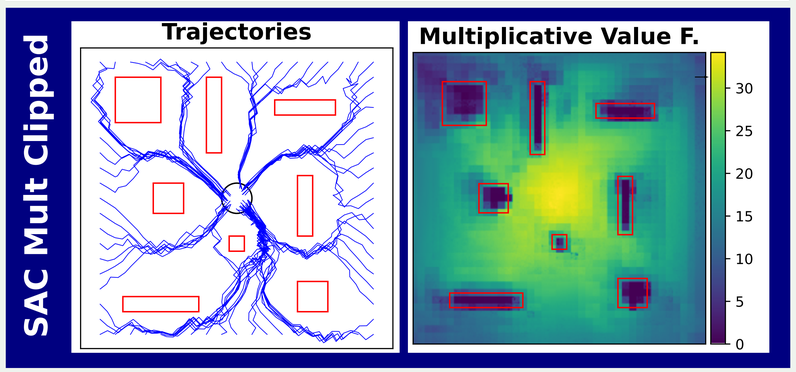

Value Loss for Lunar Lander

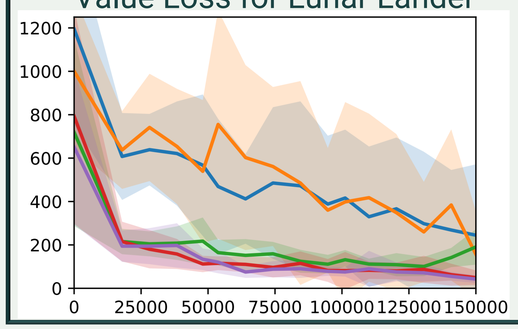

Improved

- **Training stability**
- **Sample efficiency**
- **Value matching to the obstacles**

Real-World Experiments

(a)

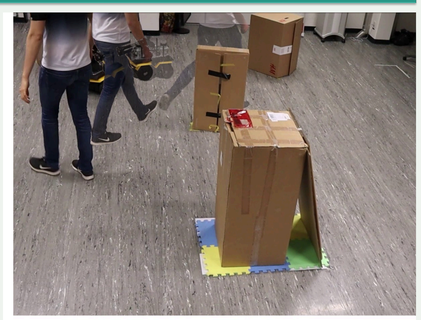

(b1)

(b2)

(c)

- **Differential drive robot with 1D-Lidar.**
- **Training in Gazebo Simulation.**
- **Zero-Shot Sim-to-Real.**
- **Safe Interaction with Dynamic Objects and Human.**

Summary

- **Multiplicative Value Function**
  - Safety Critic: Binary decision problem.
  - Reward Critic: Constraint-free RL.
- **Integration into SAC and PPO:**
  - Increased sample efficiency and learning stability.
- **Future works:** Theoretical justification
- **Code:** github.com/nikeke19/Safe-Mult-RL
- **Homepage with Videos:** zhejz.github.io/saferl