


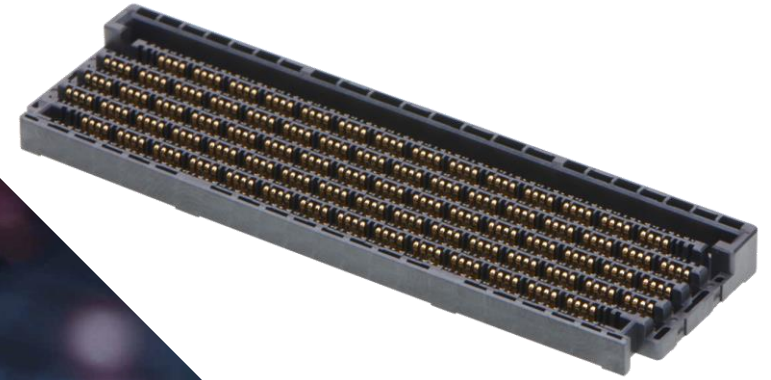

Product Release (Enhancement)

MIRROR MEZZ 15X11 OCP CONNECTORS

ADDING: Mirror Mezz Enhanced 224 Gbps Connectors to offer faster 224 Gbps speeds for next-generation data center, artificial intelligence (AI) and high-density applications using Open Compute Project (OCP)-standard hermaphroditic connectors

AUGUST 2023 | CUSTOMER PRESENTATION

creating connections for life

molex

MIRROR MEZZ 15X11 OCP CONNECTORS

Mirror Mezz, Mirror Mezz Pro and Mirror Mezz Enhanced 15x11 OCP Connectors are stackable, Open Compute Project (OCP)-standard hermaphroditic mezzanine connectors that deliver superior signal integrity performance and data speeds up to 224 Gbps to address ever-increasing data transmission requirements for telecommunications, networking and other high-density applications.

Key Product Information


Category: Board-to-Board Connectors

Data Rate: Up to 224 Gbps

Pitch: 4.00 by 1.50mm differential pair pitch

Stack Height: 5.00, 8.00 or 11.00mm

Pin Count: Up to 270 differential pairs

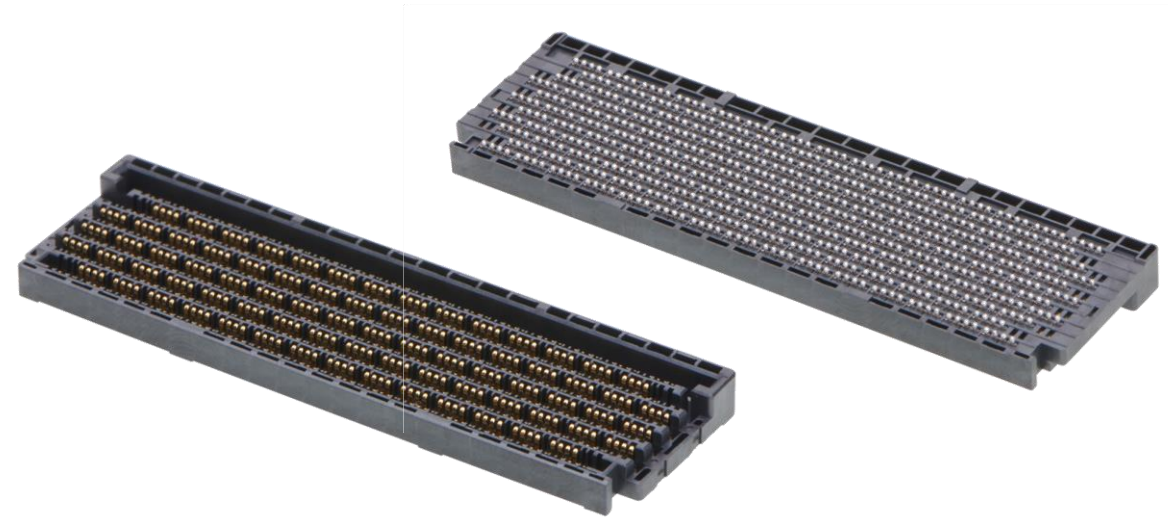

[View Product Landing Page](#)

[Download Datasheet](#)

Previously Released Series

- | | |
|--------|--|
| 209311 | Mirror Mezz 112 Gbps 2.50mm Connector |
| 218910 | Mirror Mezz Pro 112 Gbps 2.50mm Connector |
| 218916 | Mirror Mezz Pro 112 Gbps 5.50mm Connector |

New Series

- | | |
|--------|---|
| 224048 | Mirror Mezz Enhanced 224 Gbps 2.50mm Connector |
|--------|---|

VITAL PRODUCT INFORMATION



What makes this product different from the competition?

A stackable hermaphroditic design with an available Open Compute Project (OCP)-standard 15x11 compatible footprint and up to 224 Gbps data transfer rate makes Mirror Mezz Connectors a unique combination of compactness, performance and design flexibility.

How does this product create value for our customers?

Complementary pairing of identical (hermaphroditic) connectors lowers tooling and inventory costs while improving operational efficiency and optimizing space in height-constrained applications. Ball Grid Array (BGA)-attach mounting provides consistent solder ball profiles, leading to improved signal integrity for the entire connector system.

What is the Molex Advantage?

Global manufacturing capability, robust engineering support, and complementary Mirror Mezz-compatible products such as copper flex and high-performance cables make Molex a unique partner in finding capability solutions.

MARKETS AND APPLICATIONS



Server and Storage

- Networking
- Storage
- Servers



Telecommunications

- Infrastructure
- Networking

PRODUCT FEATURES AND ADVANTAGES

Supports data transmission rates up to 224 Gbps using compatible mating interface

Enables upgrading to next-generation speeds without PCB redesign

Lowest costs through hermaphroditic design

Simplifies procurement processes and inventory management while minimizing tooling requirements

Optimizes use of space in height-constrained applications


Cross-mating or self-mating of 2.50 and 5.50mm height connectors permits ultra-low and medium stack heights of 5.00, 8.00 or 11.00mm

Eases design challenges by maximizing PCB real estate

High-density connector pin field includes up to 270 differential pairs (DPs) and 107 to 115 DPs per square inch

Reduces assembly errors and damage during mating with robust shrouded housing design

Shrouding helps protect contact tips from stubbing or other damage and pass the “thumb test”

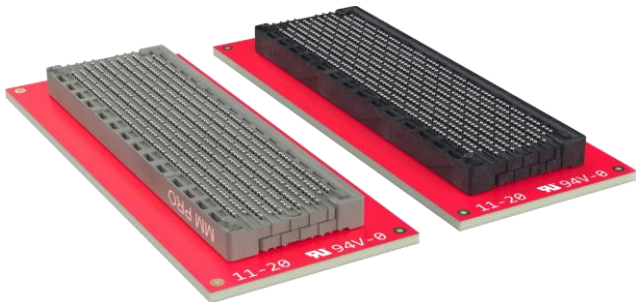

Key Specifications	
Standard	Open Compute Project (OCP)
Speed	Up to 224 Gbps
Pin Count	Up to 270 differential pairs (DPs)
Pitch	4.00mm between DPs
Stack Height	5.00, 8.00 or 11.00mm
Mates With	2.50 and 5.50mm connectors
Operating Temperature	-40 to +105°C

PRODUCT FEATURES AND ADVANTAGES (CONT'D)

Blind mating simplifies assembly operations

Contact tip design offers fine alignment of 0.70mm in blind mating scenarios, making mating operations easier and more reliable

Improves signal integrity (SI) performance and reliability

“Stubless” contact interface includes two points of contact on each beam for greater reliability and reduces minimum stack height to 5.00mm

Offers increased reliability

Opposing beam support ensures full support for mated beams at mated condition with 1.50mm maximum wiper

Permits easy upgrades to 224 Gbps speeds with Mirror Mezz Enhanced

Identical footprint to Mirror Mezz and Mirror Mezz Pro connectors helps reduce PCB redesign requirements

Reduces costs through use of ball grid array (BGA) attachment

Proven BGA design features a consistent ball profile, leading to improved and more predictable SI

Provides cost savings and design versatility

Flex cable links offer excellent SI with controlled channels and pinned grounds, enabling relaxed tolerancing with offsets between boards and flexible architecture

Optimizes performance and SI

Pitch varies between contacts and “paddles” to optimize impedance while paddle-to-contact bend direction alternates between rows to minimize crosstalk





THANK YOU

creating connections for life

molex