

Molex Supports OCP's Open Standards >



OCP-compliant solutions enable a diverse set of compute accelerators within the data center.

OPEN ACCELERATOR MODULE INFRASTRUCTURE

The rapid evolution of artificial intelligence (AI) is producing an explosion of new types of hardware accelerators for machine learning (ML) and deep learning (DL). Common requirements such as flexibility, robustness, serviceability and configuration management as well as power and cooling make an open mezzanine module a smart design choice. Additional Open Accelerator Module (OAM) benefits include the ability to support multiple suppliers, also termed a multi-OAM, Universal Base Board (UBB).

In support of the OAM infrastructure, the Molex Mirror Mezz 15x11 solution was specifically developed as the sole connector interface between the module and the base board. Molex Mirror Mezz Connectors offer superior signal integrity and density, allowing customers to achieve mechanical and electrical targets required by next-generation high-speed systems. In addition to signal contacts, the 15x11 Mirror Mezz Connector for OAM also transfers the necessary power to the modules, creating an all-in-one solution for mezzanine connectivity.



Mirror Mezz Connector

FEATURES AND ADVANTAGES

68.00 by 22.00mm after mating

Up to 270 differential pairs


56, 112 or 224Gbps

1.0A per pin @ 1.5oz. Copper after derating


90 Ohms +/- 5%

Supports either 12V or 48V input


Up to 200W (12V) or 500W (48V)



Self-Mating Mirror Mezz Connector

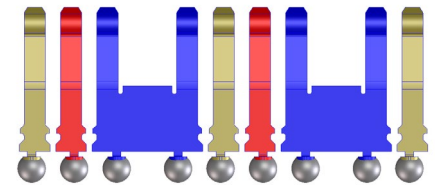

GSSG Pinout and Ball Grid Array Attachment

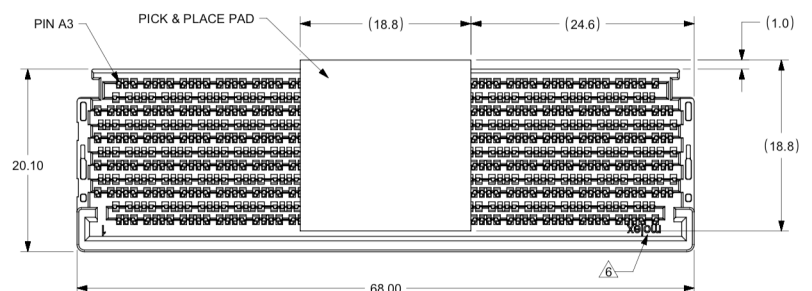

www.molex.com