

Sequence Report



Summary

Mic500 200k Termination

Signal Path Setup PASSED

Stepped Frequency Sweep MIC 500 FAILED

Mic 2k 200k termination

Signal Path Setup PASSED

Stepped Frequency Sweep MIC 2K FAILED

Mic 2k 15dB PAD 200k termination

Signal Path Setup PASSED

Stepped Frequency Sweep 15dB PAD FAILED

Line Gain -10 200kTermination

Signal Path Setup PASSED

Stepped Frequency Sweep -10 FAILED

Line Gain -10 600 Termination

Signal Path Setup PASSED

Level and Gain -10 FAILED

Line Gain +5 200kTermination

Signal Path Setup PASSED

Stepped Frequency Sweep +5 FAILED

Line Gain +5 600 Termination

Signal Path Setup PASSED

Level and Gain +5 FAILED

Line Gain -5 600 Termination

Signal Path Setup PASSED

Level and Gain -5 FAILED

Line Gain 0 600 Termination

Signal Path Setup PASSED

Level and Gain 0 FAILED

Line Gain +10 600 Termination

Signal Path Setup PASSED

Level and Gain +10 FAILED

Line Gain +10 200k Termination Level Hi

Signal Path Setup PASSED

Noise Recorder (RMS) CW FAILED

Line Gain +10 200k Termination Level Low

Signal Path Setup PASSED

Noise Recorder (RMS) CCW FAILED

Hi Z Gain -10 2.2M 200k Termination

Signal Path Setup	✓ PASSED
Level and Gain 2.2M	⚠ FAILED
Hi Z Gain -10 47k 200k Termination	
Signal Path Setup	✓ PASSED
Level and Gain 47K	⚠ FAILED
Dummy Signal Path For Report	
Signal Path Setup	✓ PASSED
Sequence Result:	
Sequence Result:	⚠ FAILED

Sequence Report



Mic500 200k Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00

Sequence Report



Port C (hex): 00
Port D (hex): 00
• Clocks
Output Rate: Track Output SR
Sync Out Level: 3.300 V
Sync Out Polarity: Normal
Timebase Reference: Internal
Jitter: Disabled
• Triggers
Source: Off
Input Logic Level: 3.300 V
Edge: Rising

Mic500 200k Termination : Verify Connections

Waveform: Sine
Generator Level: -42.300 dBu
DC Offset: 0.000 V
Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:34:41.449 PM)

Ch1 282.5 mVrms

Gain (5/15/2023 7:34:41.449 PM)

Ch1 33.538 dB

THD+N Ratio (5/15/2023 7:34:41.449 PM)

Ch1 ---- %

Frequency (5/15/2023 7:34:41.449 PM)

Ch1 ---- Hz

Sequence Report



Mic500 200k Termination : Stepped Frequency Sweep MIC 500

Generator Level: -42.300 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/15/2023 7:34:44 PM

RMS Level (5/15/2023 7:34:44.942 PM)

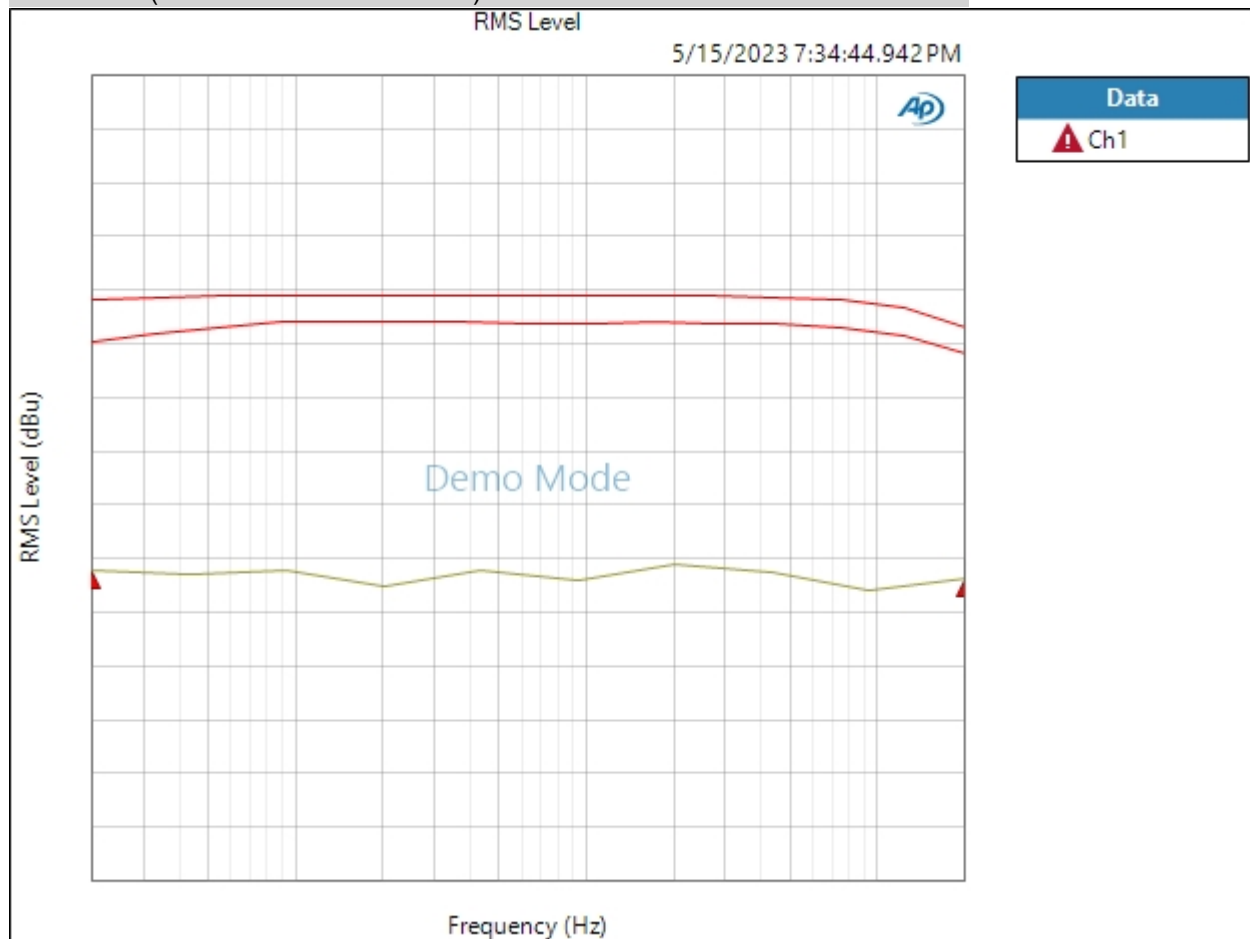


Ch1 ▲ Failed Lower Limit

Sequence Report



Result: FAILED


THD+N Ratio (5/15/2023 7:34:44.942 PM)

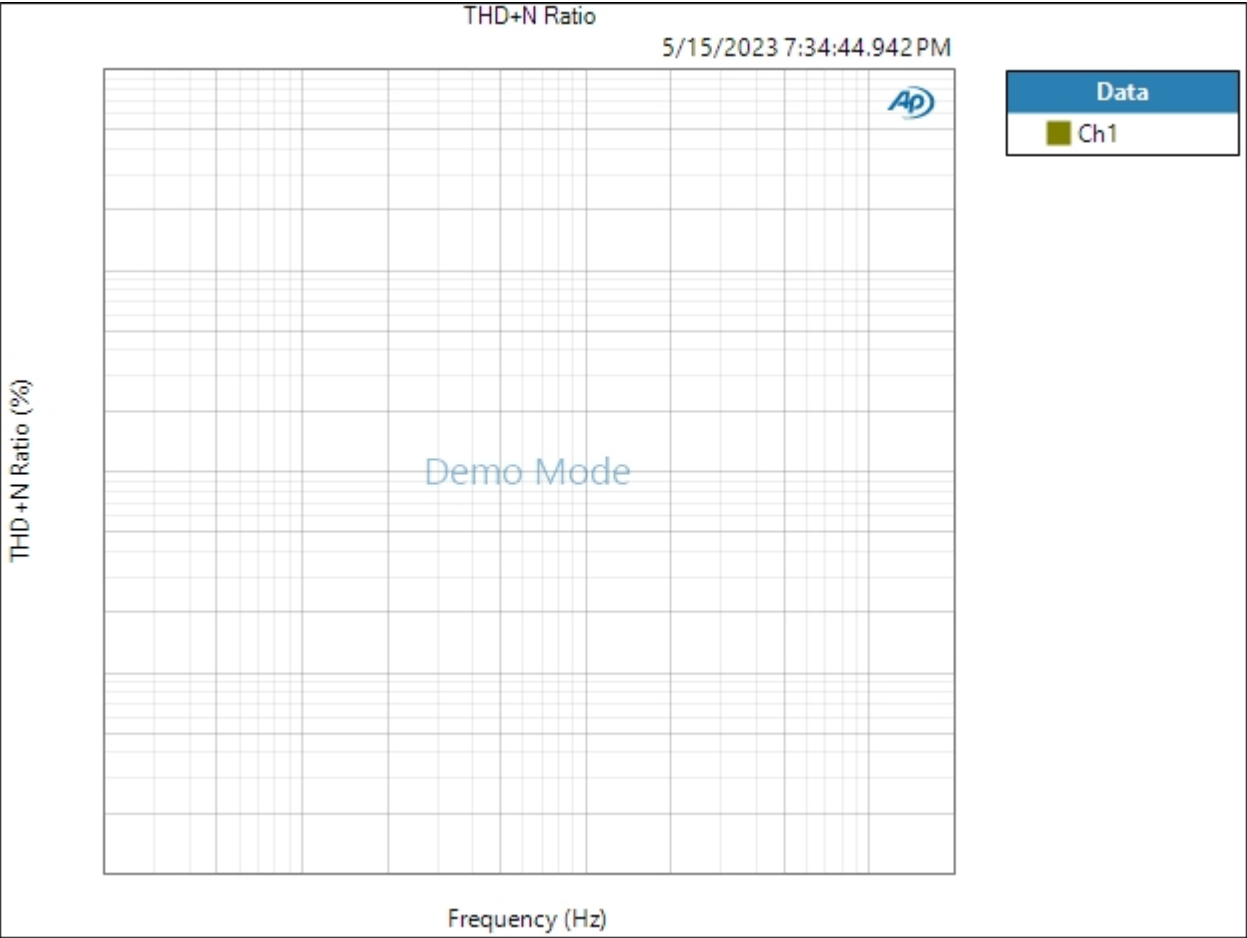

Result: PASSED

THD Ratio (5/15/2023 7:34:44.942 PM)

Sequence Report

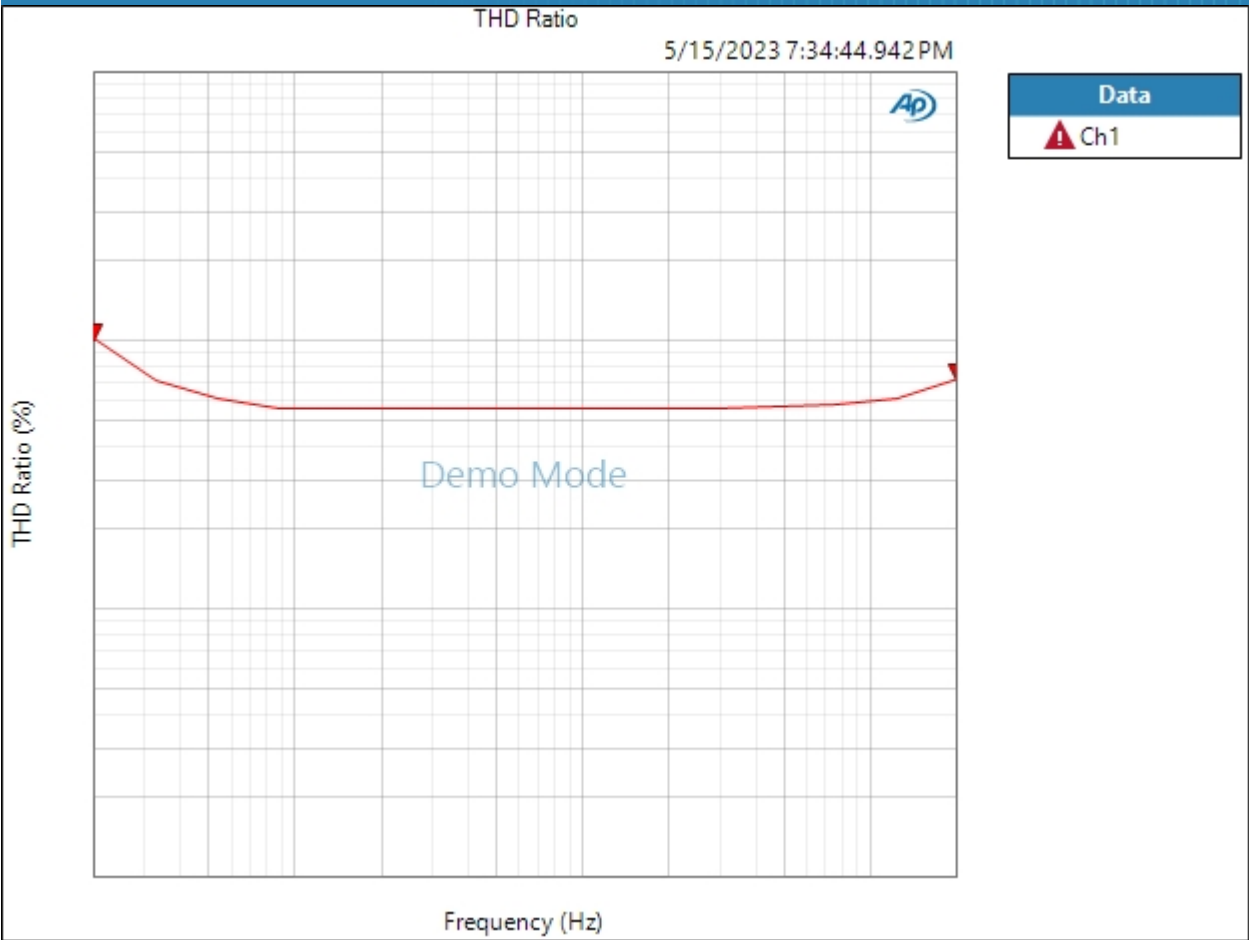

Ch1 Failed Upper Limit

Result: FAILED

Sequence Report



Mic 2k 200k termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 7:36 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Mic 2k 200k termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:34:50.119 PM)

Ch1 277.9 mVrms

Gain (5/15/2023 7:34:50.119 PM)

Ch1 33.396 dB

THD+N Ratio (5/15/2023 7:34:50.119 PM)

Ch1 ---- %

Frequency (5/15/2023 7:34:50.119 PM)

Ch1 ---- Hz

Sequence Report



Mic 2k 200k termination : Stepped Frequency Sweep MIC 2K

Generator Level: -42.300 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/15/2023 7:34:53 PM

RMS Level (5/15/2023 7:34:53.832 PM)

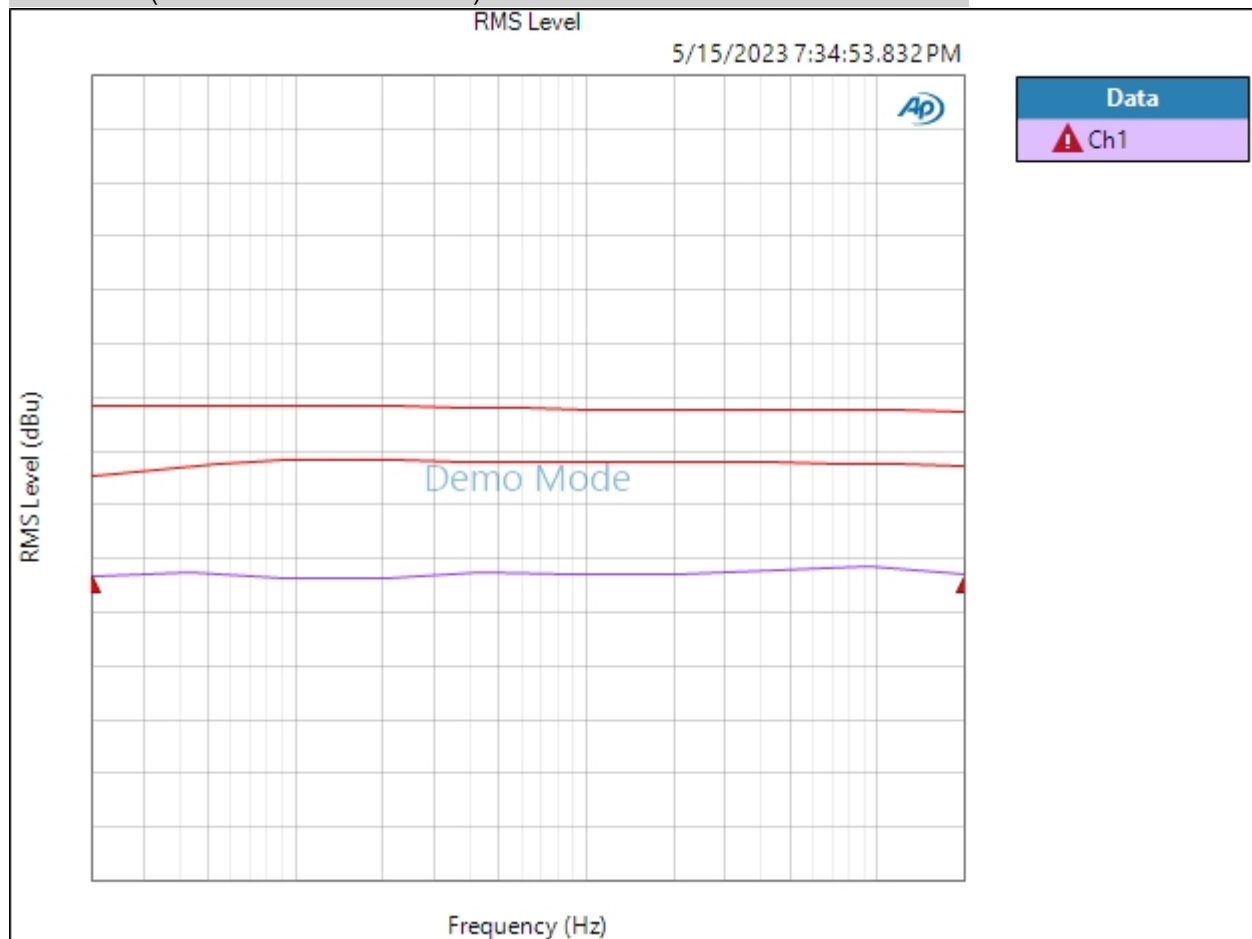

Ch1 Failed Lower Limit

5/15/2023 7:36 PM


Page 10 of 54

Sequence Report



Result: ▲ FAILED

THD Ratio (5/15/2023 7:34:53.832 PM)

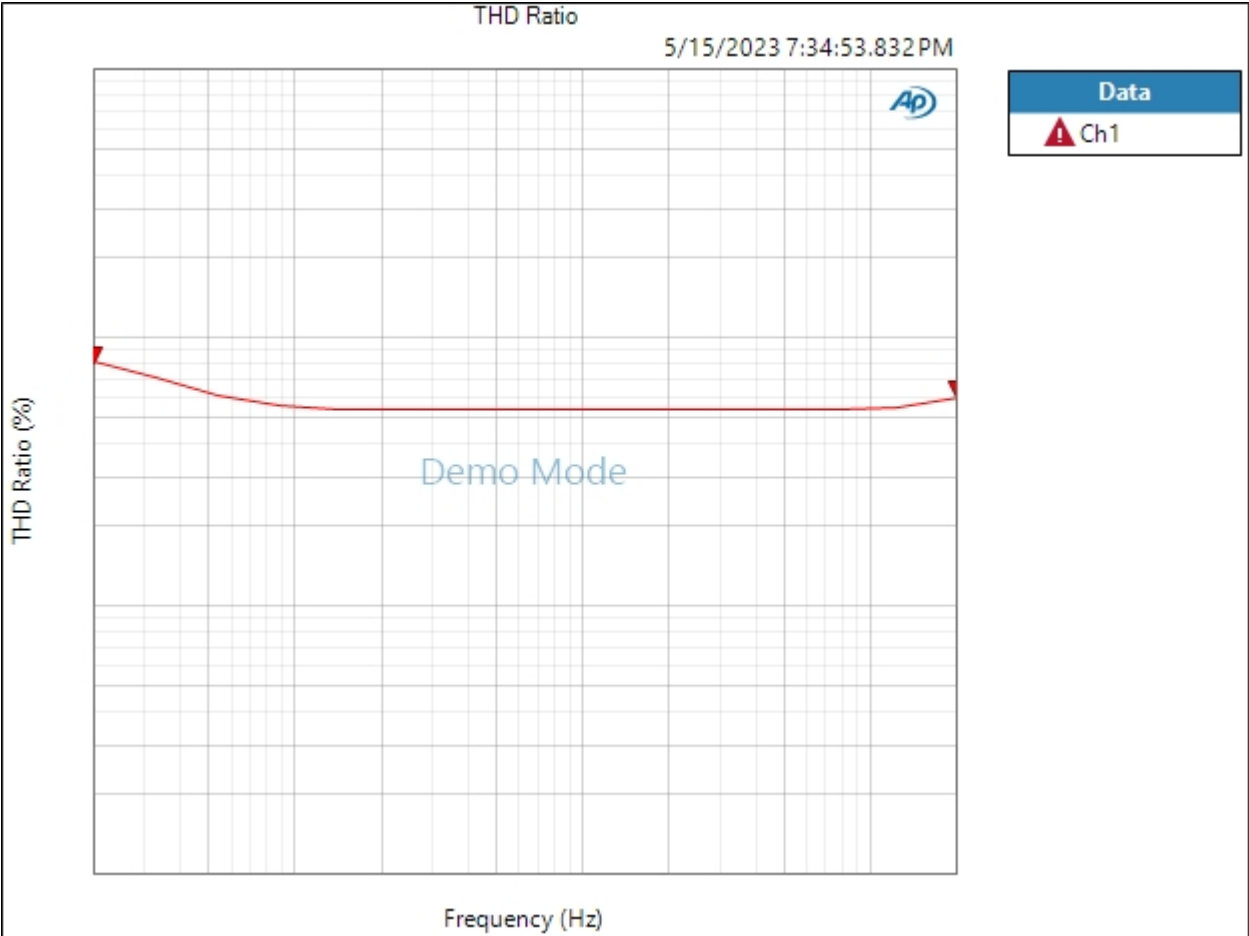

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

Sequence Report



Mic 2k 15dB PAD 200k termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 7:36 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Mic 2k 15dB PAD 200k termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:34:59.015 PM)

Ch1 290.4 mVrms

Gain (5/15/2023 7:34:59.015 PM)

Ch1 33.779 dB

THD+N Ratio (5/15/2023 7:34:59.015 PM)

Ch1 ---- %

Frequency (5/15/2023 7:34:59.015 PM)

Ch1 ---- Hz

Sequence Report



Mic 2k 15dB PAD 200k termination : Stepped Frequency Sweep 15dB PAD

Generator Level: -42.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/15/2023 7:35:03 PM

RMS Level (5/15/2023 7:35:03.226 PM)

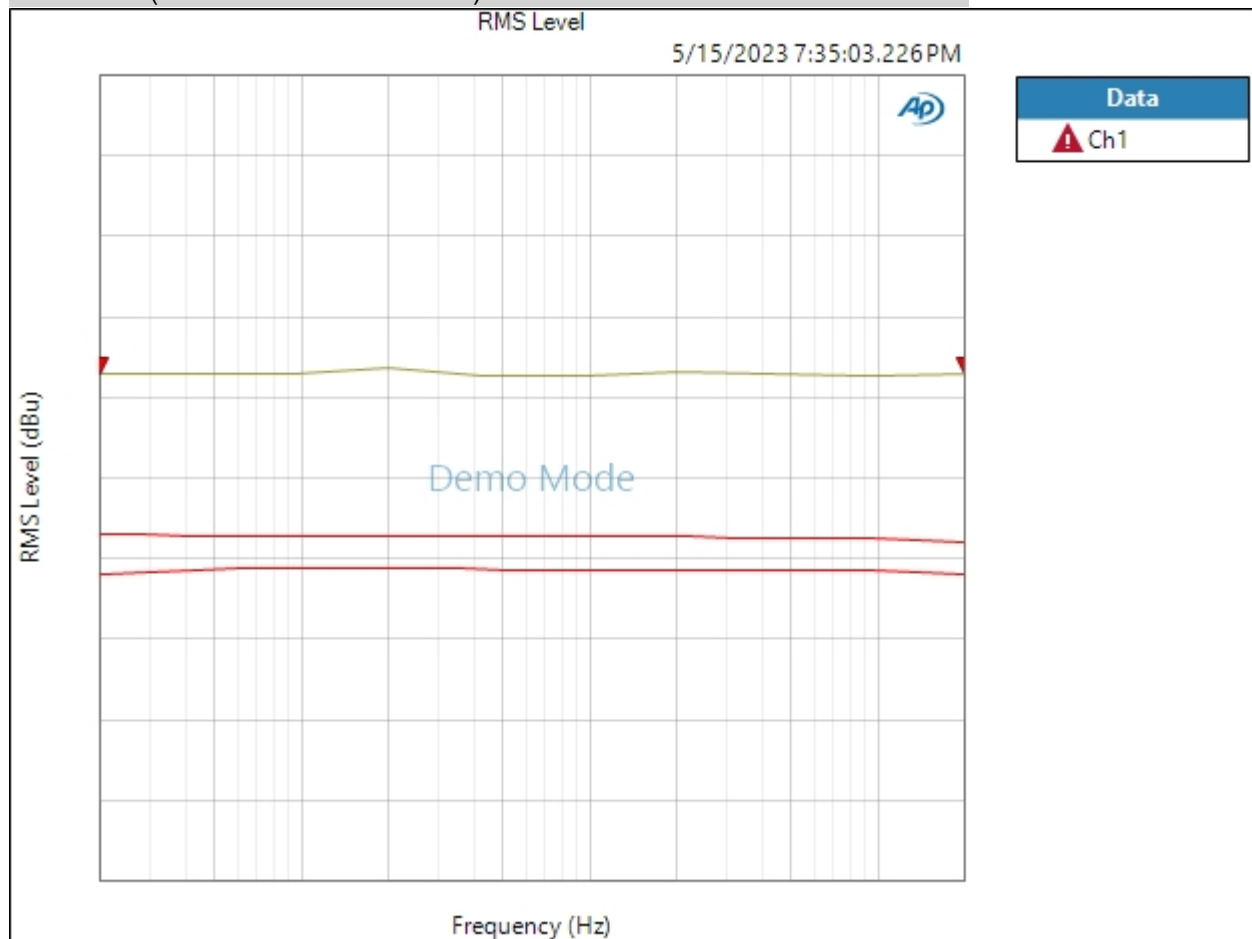

Ch1 Failed Upper Limit

5/15/2023 7:36 PM


Page 14 of 54

Sequence Report



Result: FAILED

THD Ratio (5/15/2023 7:35:03.226 PM)

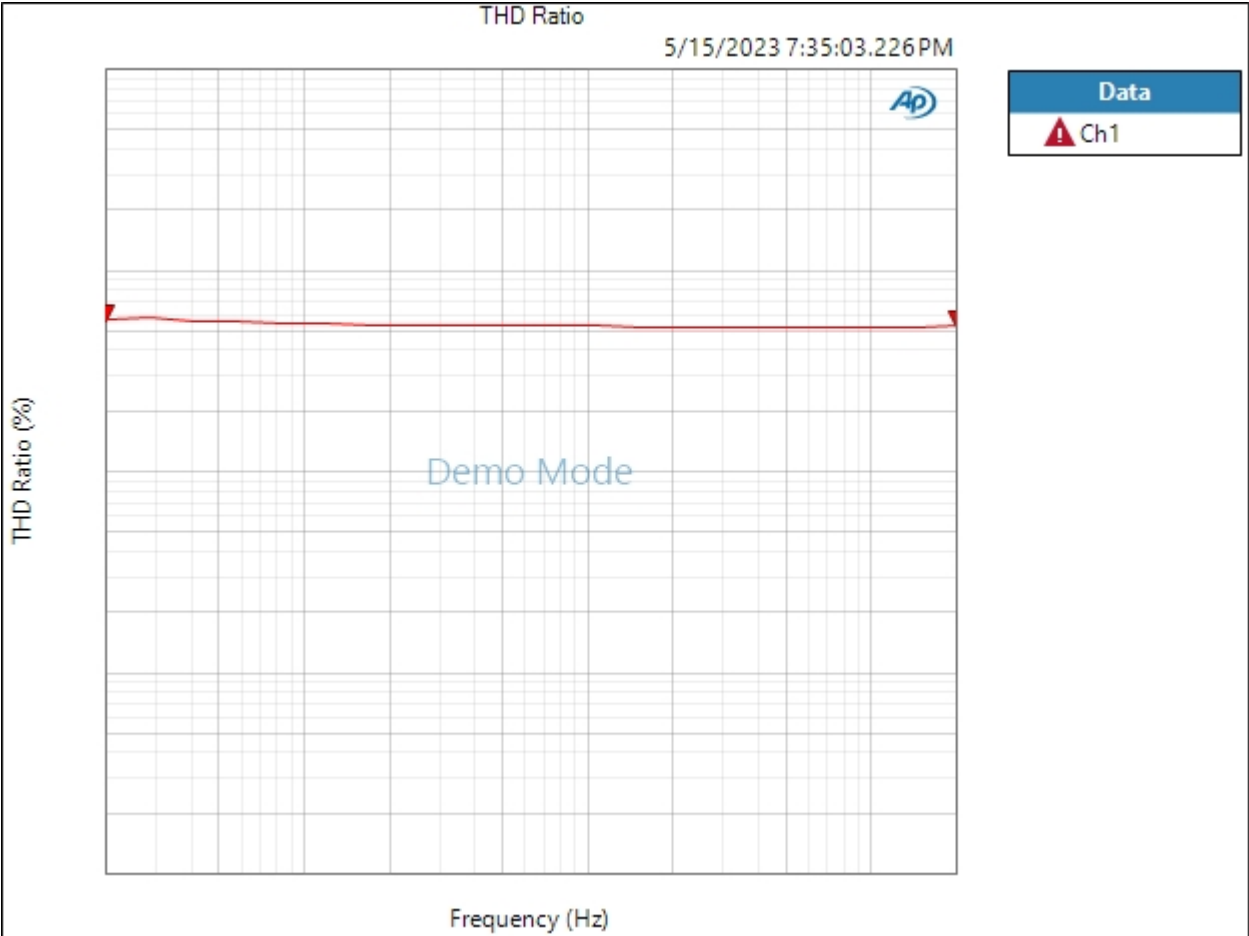

Ch1 Failed Upper Limit

Result: FAILED

Sequence Report



Line Gain -10 200kTermination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBra:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 7:36 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain -10 200kTermination : Verify Connections

Waveform: Sine

Generator Level: 0.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:35:08.885 PM)

Ch1 277.1 mVrms

Gain (5/15/2023 7:35:08.885 PM)

Ch1 -8.930 dB

THD+N Ratio (5/15/2023 7:35:08.885 PM)

Ch1 ---- %

Frequency (5/15/2023 7:35:08.885 PM)

Ch1 ---- Hz

Sequence Report



Line Gain -10 200kTermination : Stepped Frequency Sweep -10

Generator Level: 0.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/15/2023 7:35:13 PM

RMS Level (5/15/2023 7:35:13.659 PM)

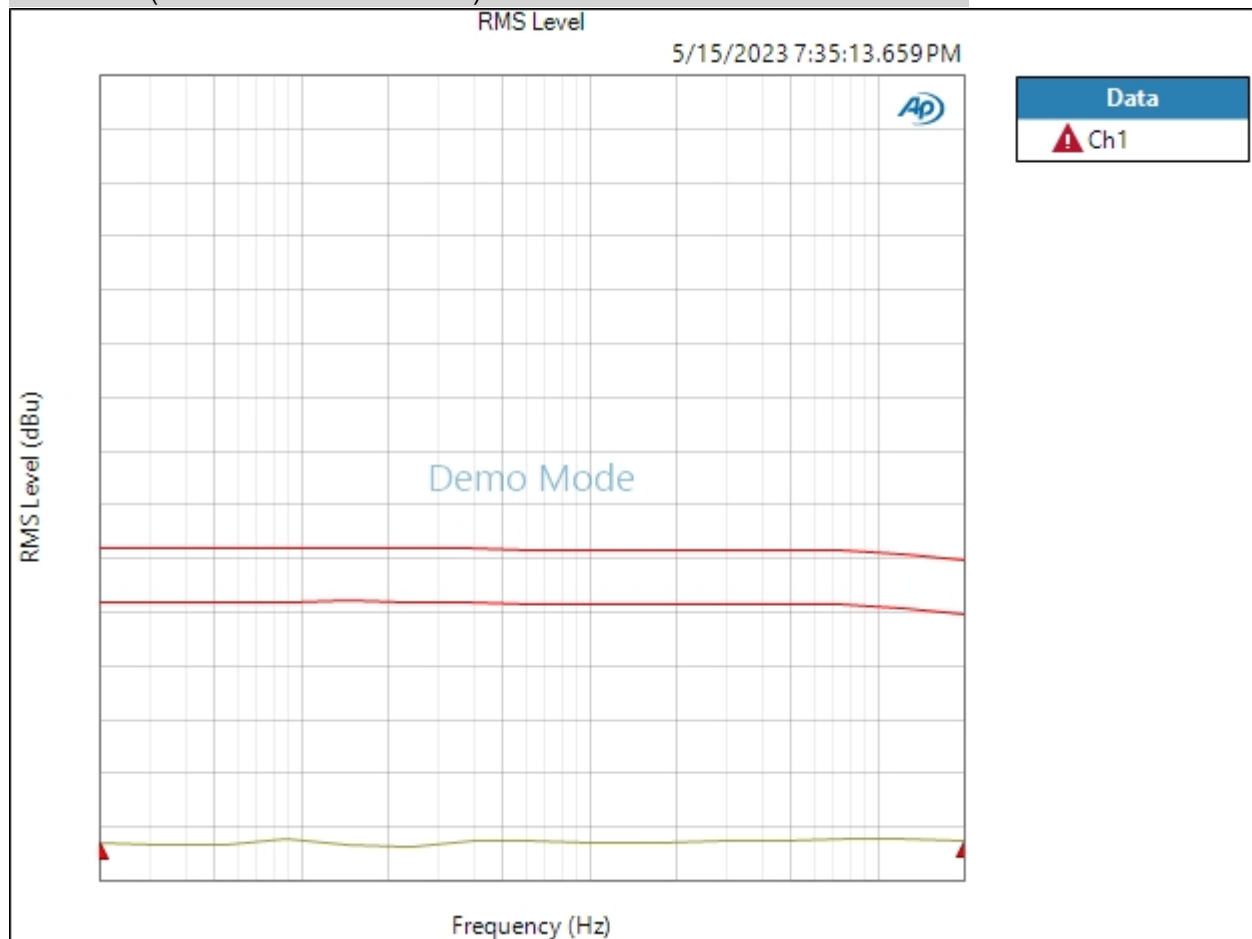


Ch1 Failed Lower Limit

Sequence Report



Result: FAILED

THD+N Ratio (5/15/2023 7:35:13.659 PM)

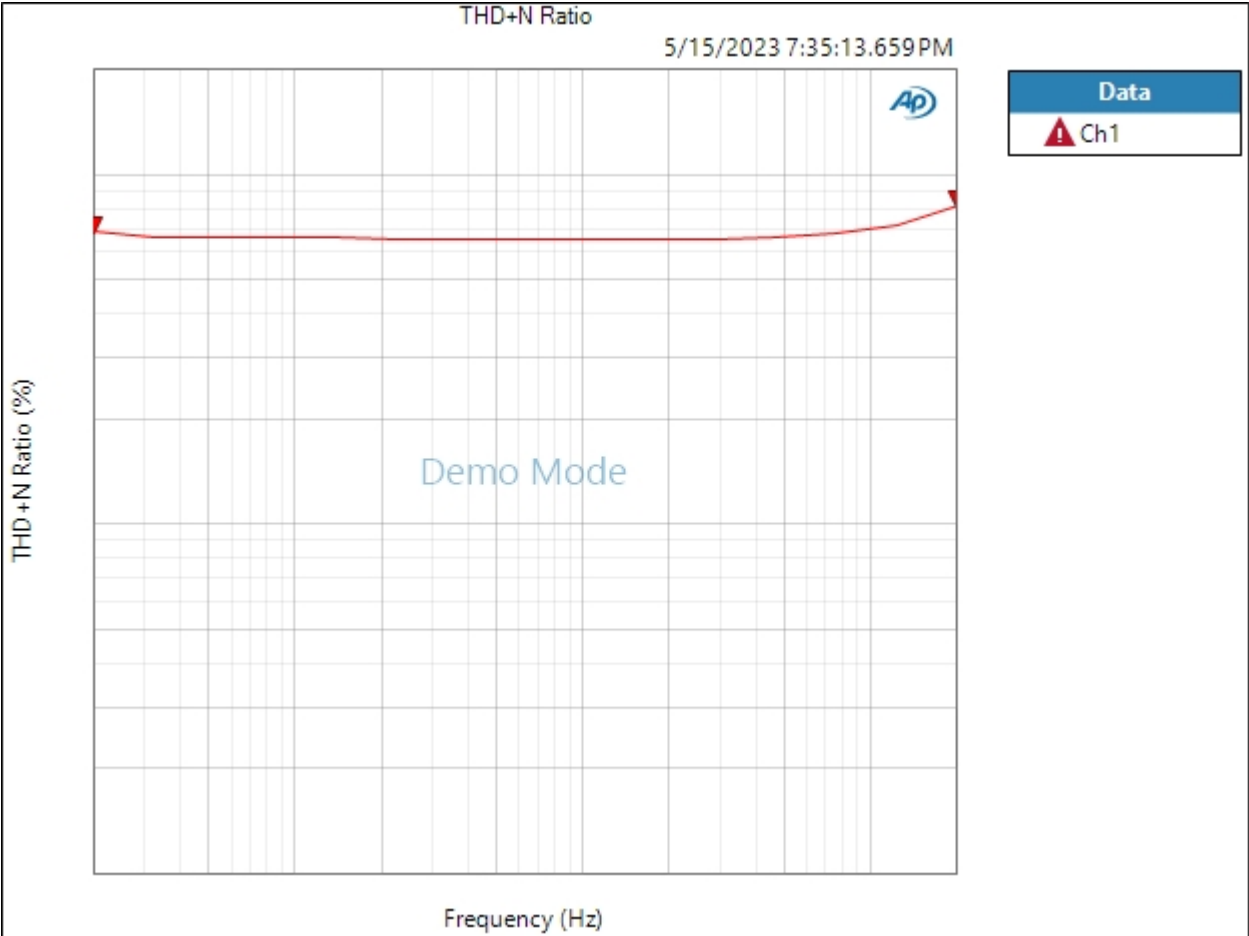

Ch1 Failed Upper Limit

Result: FAILED

Sequence Report



Line Gain -10 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBra:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 7:36 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain -10 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:35:19.066 PM)

Ch1 290.4 mVrms

Gain (5/15/2023 7:35:19.066 PM)

Ch1 1.479 dB

THD+N Ratio (5/15/2023 7:35:19.066 PM)

Ch1 ---- %

Frequency (5/15/2023 7:35:19.066 PM)

Ch1 ---- Hz

Sequence Report



Line Gain -10 600 Termination : Level and Gain -10

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:35:21.986 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-11.500 dBu	-8.477 dBu	-8.500 dBu	

Result:  FAILED

Sequence Report



Line Gain +5 200kTermination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
AG52 Generator Option: Installed
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

5/15/2023 7:36 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain +5 200kTermination : Verify Connections

Waveform: Sine

Generator Level: 0.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:35:27.530 PM)

Ch1 279.6 mVrms

Gain (5/15/2023 7:35:27.530 PM)

Ch1 -8.852 dB

THD+N Ratio (5/15/2023 7:35:27.530 PM)

Ch1 ---- %

Frequency (5/15/2023 7:35:27.530 PM)

Ch1 ---- Hz

Sequence Report



Line Gain +5 200kTermination : Stepped Frequency Sweep +5

Generator Level: 0.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/15/2023 7:35:32 PM

RMS Level (5/15/2023 7:35:32.272 PM)

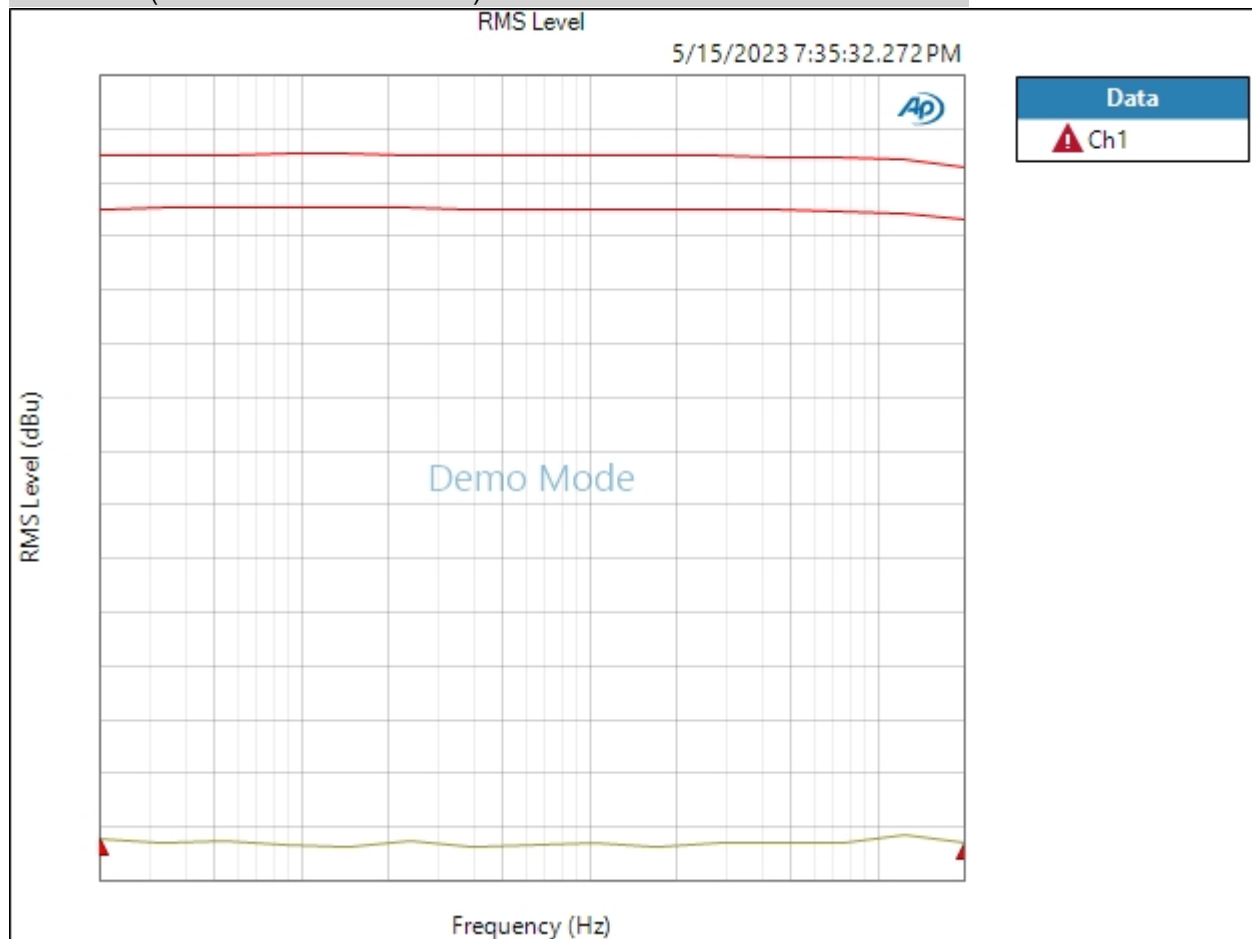

Ch1 Failed Lower Limit

5/15/2023 7:36 PM


Page 25 of 54

Sequence Report



Result: FAILED

THD+N Ratio (5/15/2023 7:35:32.272 PM)

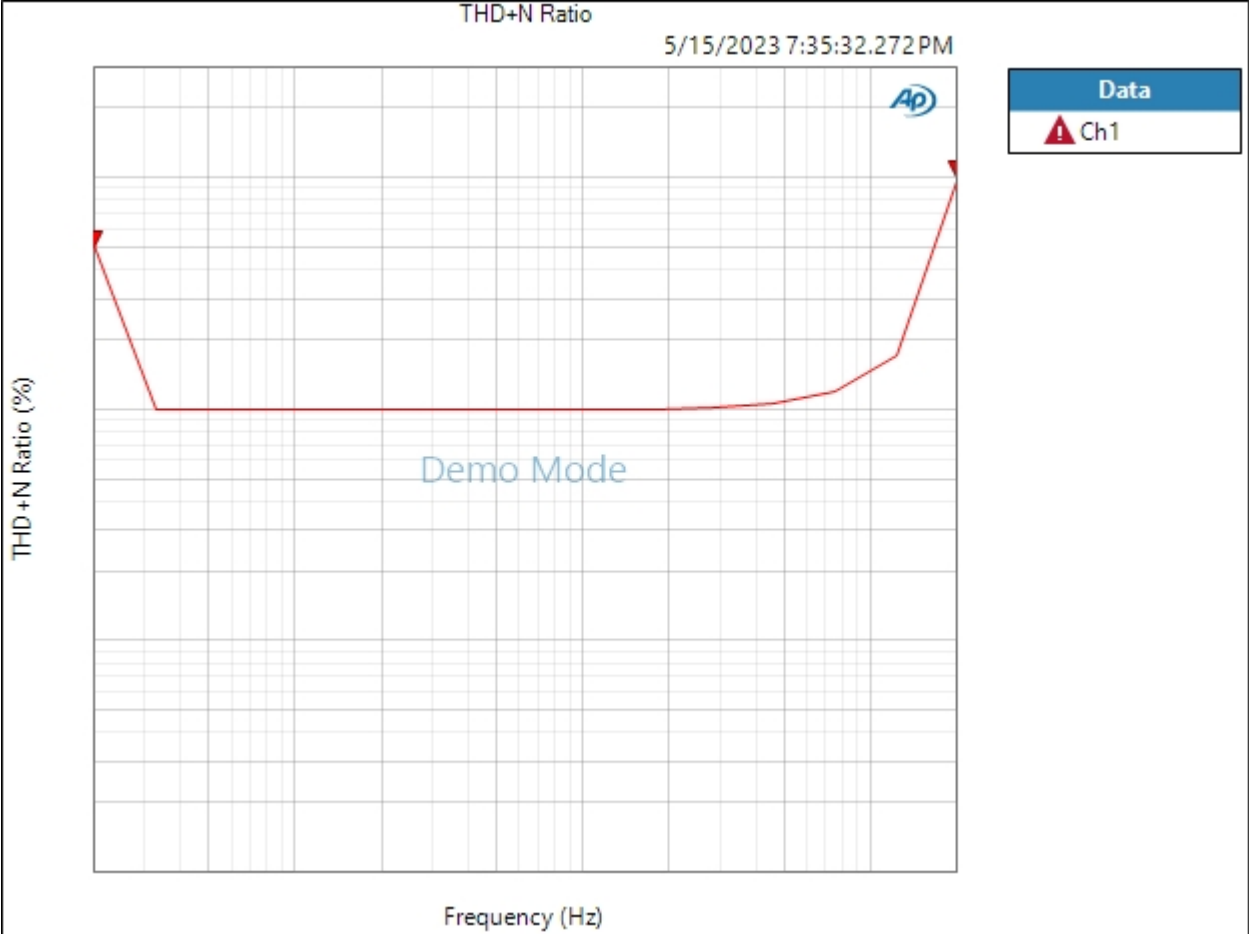

Ch1 Failed Upper Limit

Result: FAILED

Sequence Report



Line Gain +5 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBra:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 7:36 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain +5 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:35:37.831 PM)

Ch1 294.7 mVrms

Gain (5/15/2023 7:35:37.831 PM)

Ch1 1.607 dB

THD+N Ratio (5/15/2023 7:35:37.831 PM)

Ch1 ---- %

Frequency (5/15/2023 7:35:37.831 PM)

Ch1 ---- Hz

Sequence Report



Line Gain +5 600 Termination : Level and Gain +5


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:35:40.632 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	+3.500 dBu	-8.482 dBu	+6.500 dBu	

Result:  FAILED

Sequence Report



Line Gain -5 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 7:36 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain -5 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:35:46.141 PM)

Ch1 282.6 mVrms

Gain (5/15/2023 7:35:46.141 PM)

Ch1 1.241 dB

THD+N Ratio (5/15/2023 7:35:46.141 PM)

Ch1 ---- %

Frequency (5/15/2023 7:35:46.141 PM)

Ch1 ---- Hz

Sequence Report



Line Gain -5 600 Termination : Level and Gain -5


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:35:48.954 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-6.500 dBu	-8.489 dBu	-3.500 dBu	

Result:  FAILED

Sequence Report



Line Gain 0 600 Termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
AG52 Generator Option: Installed
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 600 ohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

5/15/2023 7:36 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain 0 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:35:54.485 PM)

Ch1 296.4 mVrms

Gain (5/15/2023 7:35:54.485 PM)

Ch1 1.655 dB

THD+N Ratio (5/15/2023 7:35:54.485 PM)

Ch1 ---- %

Frequency (5/15/2023 7:35:54.485 PM)

Ch1 ---- Hz

Sequence Report



Line Gain 0 600 Termination : Level and Gain 0


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:35:57.308 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-1.500 dBu	-8.456 dBu	+1.500 dBu	

Result:  FAILED

Sequence Report



Line Gain +10 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 7:36 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain +10 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:36:02.897 PM)

Ch1 283.0 mVrms

Gain (5/15/2023 7:36:02.897 PM)

Ch1 1.255 dB

THD+N Ratio (5/15/2023 7:36:02.897 PM)

Ch1 ---- %

Frequency (5/15/2023 7:36:02.897 PM)

Ch1 ---- Hz

Sequence Report



Line Gain +10 600 Termination : Level and Gain +10


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:36:05.695 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	+8.500 dBu	-8.643 dBu	+11.500 dBu	

Result:  FAILED

Sequence Report



Line Gain +10 200k Termination Level Hi : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 7:36 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain +10 200k Termination Level Hi : Verify Connections

Waveform: Sine

Generator Level: -20.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:36:11.209 PM)

Ch1 290.3 mVrms

Gain (5/15/2023 7:36:11.209 PM)

Ch1 11.475 dB

THD+N Ratio (5/15/2023 7:36:11.209 PM)

Ch1 ---- %

Frequency (5/15/2023 7:36:11.209 PM)

Ch1 ---- Hz


Sequence Report



Line Gain +10 200k Termination Level Hi : Noise Recorder (RMS) CW

Waveform: None
Low-pass Filter: 20 kHz
Weighting Filter: Signal Path
High-pass Filter: 20 Hz
Sweep Time: 0.00:00:03.000
Reading Rate: 10/sec
Input Bandwidth: Use Signal Path
Record Acquisition: False
Measured 1 5/15/2023 7:36:16 PM

RMS Level (5/15/2023 7:36:16.549 PM)

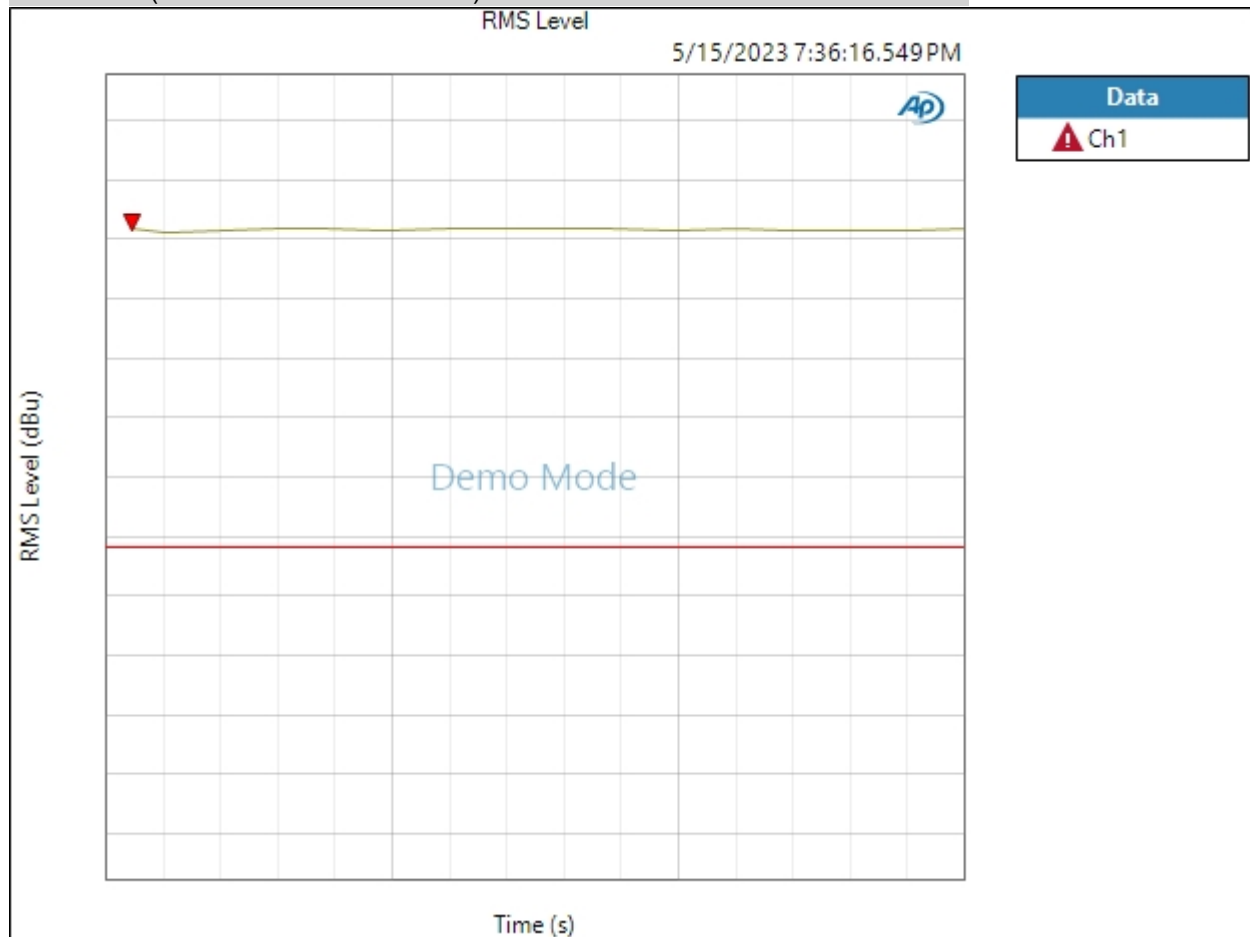

Ch1 Failed Upper Limit

Result: FAILED

5/15/2023 7:36 PM

Page 41 of 54

Sequence Report



Line Gain +10 200k Termination Level Low : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBra:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 7:36 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain +10 200k Termination Level Low : Verify Connections

Waveform: Sine

Generator Level: -20.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:36:21.956 PM)

Ch1 288.3 mVrms

Gain (5/15/2023 7:36:21.956 PM)

Ch1 11.416 dB

THD+N Ratio (5/15/2023 7:36:21.956 PM)

Ch1 ---- %

Frequency (5/15/2023 7:36:21.956 PM)

Ch1 ---- Hz


Sequence Report



Line Gain +10 200k Termination Level Low : Noise Recorder (RMS) CCW

Waveform: None
Low-pass Filter: 20 kHz
Weighting Filter: Signal Path
High-pass Filter: 20 Hz
Sweep Time: 0.00:00:03.000
Reading Rate: 10/sec
Input Bandwidth: Use Signal Path
Record Acquisition: False
Measured 1 5/15/2023 7:36:28 PM

RMS Level (5/15/2023 7:36:28.065 PM)

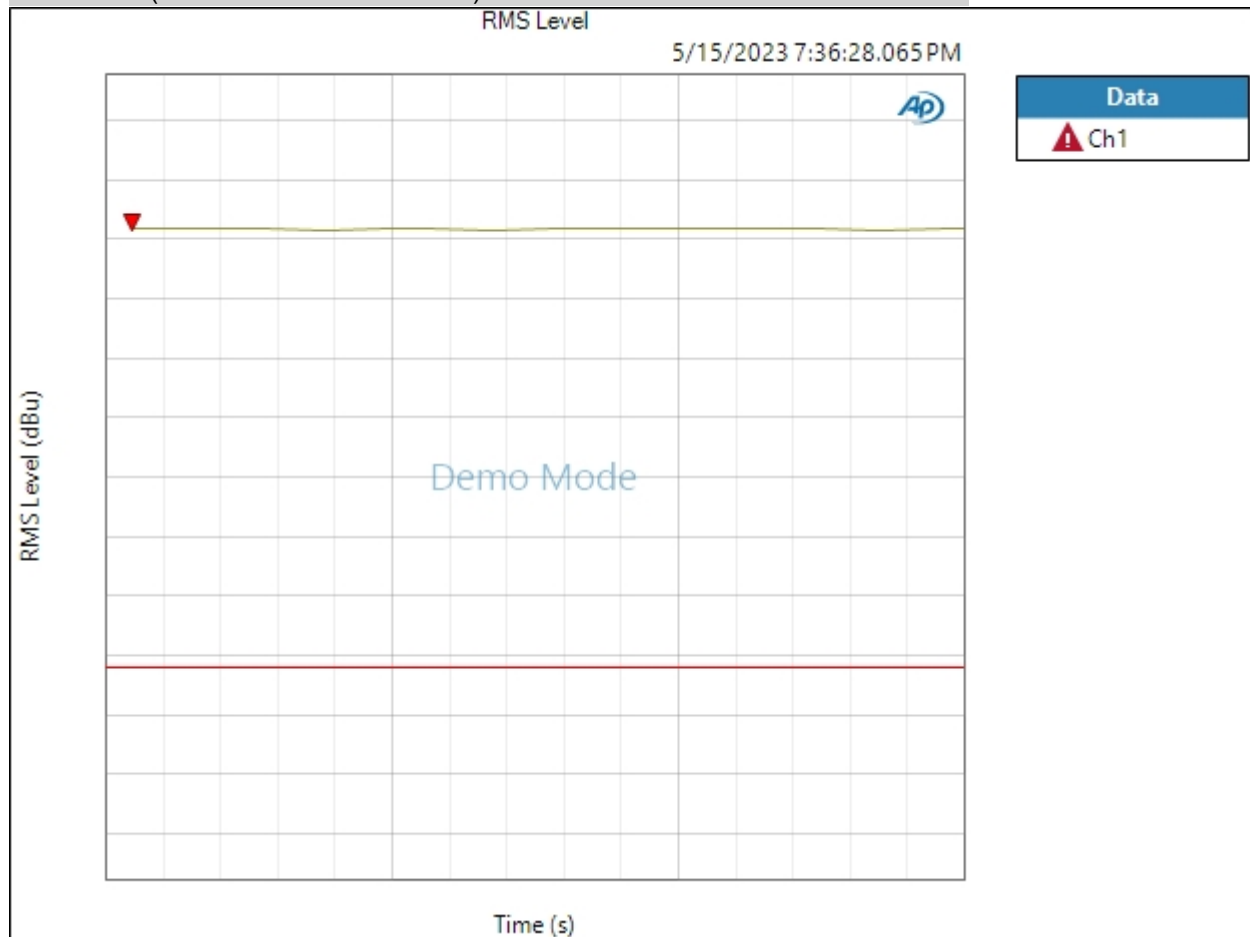

Ch1 Failed Upper Limit

Result: FAILED

5/15/2023 7:36 PM

Page 45 of 54

Sequence Report



Hi Z Gain -10 2.2M 200k Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	2
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 7:36 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Hi Z Gain -10 2.2M 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:36:33.499 PM)

Ch1 287.0 mVrms

Gain (5/15/2023 7:36:33.499 PM)

Ch1 13.675 dB

THD+N Ratio (5/15/2023 7:36:33.499 PM)

Ch1 ---- %

Frequency (5/15/2023 7:36:33.499 PM)

Ch1 ---- Hz

Sequence Report



Hi Z Gain -10 2.2M 200k Termination : Level and Gain 2.2M


Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:36:36.975 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-2.000 dBu	-8.597 dBu	+2.000 dBu	

Result:  FAILED

Sequence Report



Hi Z Gain -10 47k 200k Termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 2
Source Impedance: 100 ohm
AG52 Generator Option: Installed
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

5/15/2023 7:36 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Hi Z Gain -10 47k 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:36:42.529 PM)

Ch1 305.9 mVrms

Gain (5/15/2023 7:36:42.529 PM)

Ch1 14.231 dB

THD+N Ratio (5/15/2023 7:36:42.529 PM)

Ch1 ---- %

Frequency (5/15/2023 7:36:42.529 PM)

Ch1 ---- Hz

Sequence Report



Hi Z Gain -10 47k 200k Termination : Level and Gain 47K


Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 7:36:45.402 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-8.000 dBu	-8.678 dBu	-4.000 dBu	

Result:  FAILED

Sequence Report



Dummy Signal Path For Report : Signal Path Setup

Output Connector:	Analog Unbalanced
Channels:	2
Source Impedance:	50 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Unbalanced
Channels:	2
Termination:	100 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00
Port D (hex):	00

5/15/2023 7:36 PM

Sequence Report



- Clocks

Output Rate:	Track Output SR
Sync Out Level:	3.300 V
Sync Out Polarity:	Normal
Timebase Reference:	Internal
Jitter:	Disabled

- Triggers

Source:	Off
Input Logic Level:	3.300 V
Edge:	Rising

Dummy Signal Path For Report : Verify Connections

Waveform:	Sine
Generator Level:	100.0 mVrms
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/15/2023 7:36:49.158 PM)

Ch1	281.5 mVrms
Ch2	286.3 mVrms