

## Sequence Report



### Summary

#### Mic500 200k Termination

Signal Path Setup PASSED

Stepped Frequency Sweep MIC 500 PASSED

#### Mic 2k 200k termination

Signal Path Setup PASSED

Stepped Frequency Sweep MIC 2K FAILED

#### Mic 2k 15dB PAD 200k termination

Signal Path Setup PASSED

Stepped Frequency Sweep 15dB PAD FAILED

#### Line Gain -10 200kTermination

Signal Path Setup PASSED

Stepped Frequency Sweep -10 FAILED

#### Line Gain -10 600 Termination

Signal Path Setup PASSED

Level and Gain -10 FAILED

#### Line Gain +5 200kTermination

Signal Path Setup PASSED

Stepped Frequency Sweep +5 FAILED

#### Line Gain +5 600 Termination

Signal Path Setup PASSED

Level and Gain +5 FAILED

#### Line Gain -5 600 Termination

Signal Path Setup PASSED

Level and Gain -5 FAILED

#### Line Gain 0 600 Termination

Signal Path Setup PASSED

Level and Gain 0 FAILED

#### Line Gain +10 600 Termination

Signal Path Setup PASSED

Level and Gain +10 FAILED

#### Line Gain +10 200k Termination Level Hi

Signal Path Setup PASSED

Noise Recorder (RMS) CW FAILED

#### Line Gain +10 200k Termination Level Low

Signal Path Setup PASSED

Noise Recorder (RMS) CCW PASSED

#### Hi Z Gain -10 2.2M 200k Termination

Signal Path Setup	✓ PASSED
Level and Gain 2.2M	⚠ FAILED
Hi Z Gain -10 47k 200k Termination	
Signal Path Setup	✓ PASSED
Level and Gain 47K	⚠ FAILED
Dummy Signal Path For Report	
Signal Path Setup	✓ PASSED
Sequence Result:	
Sequence Result:	⚠ FAILED

## Sequence Report



### Mic500 200k Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

#### • References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

#### • DCX

DCX is not detected.

## Sequence Report



Mic500 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 3:04:26.631 PM)

Ch1 880.4 mVrms

Gain (5/25/2023 3:04:26.631 PM)

Ch1 43.412 dB

THD+N Ratio (5/25/2023 3:04:26.631 PM)

Ch1 0.104174 %

Frequency (5/25/2023 3:04:26.631 PM)

Ch1 1.00000 kHz

## Sequence Report



Mic500 200k Termination : Stepped Frequency Sweep MIC 500

Generator Level: -42.300 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/25/2023 3:04:33 PM

RMS Level (5/25/2023 3:04:33.718 PM)

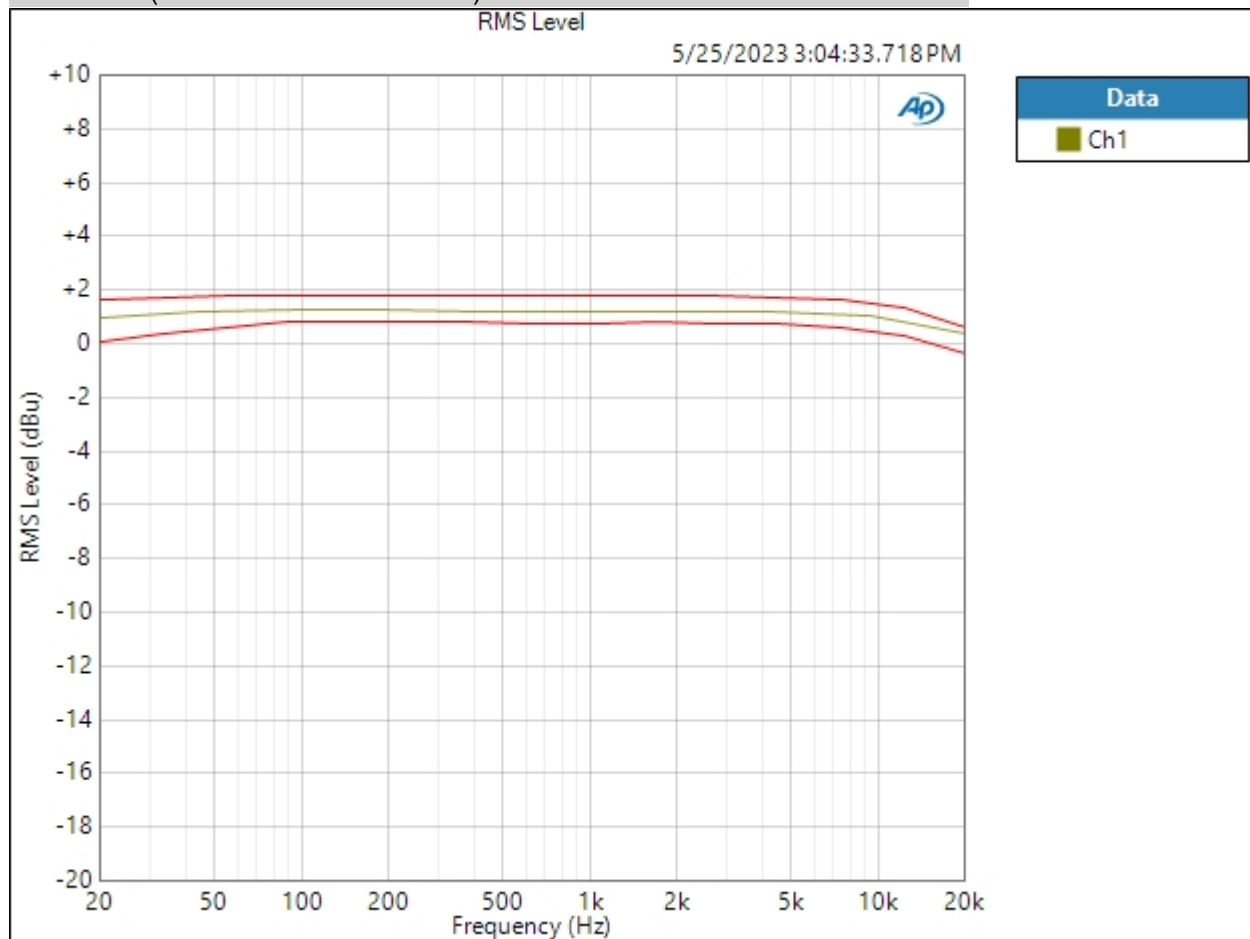

Ch1 PASSED

5/25/2023 3:07 PM


Page 5 of 45

## Sequence Report



Result: PASSED


THD+N Ratio (5/25/2023 3:04:33.718 PM)

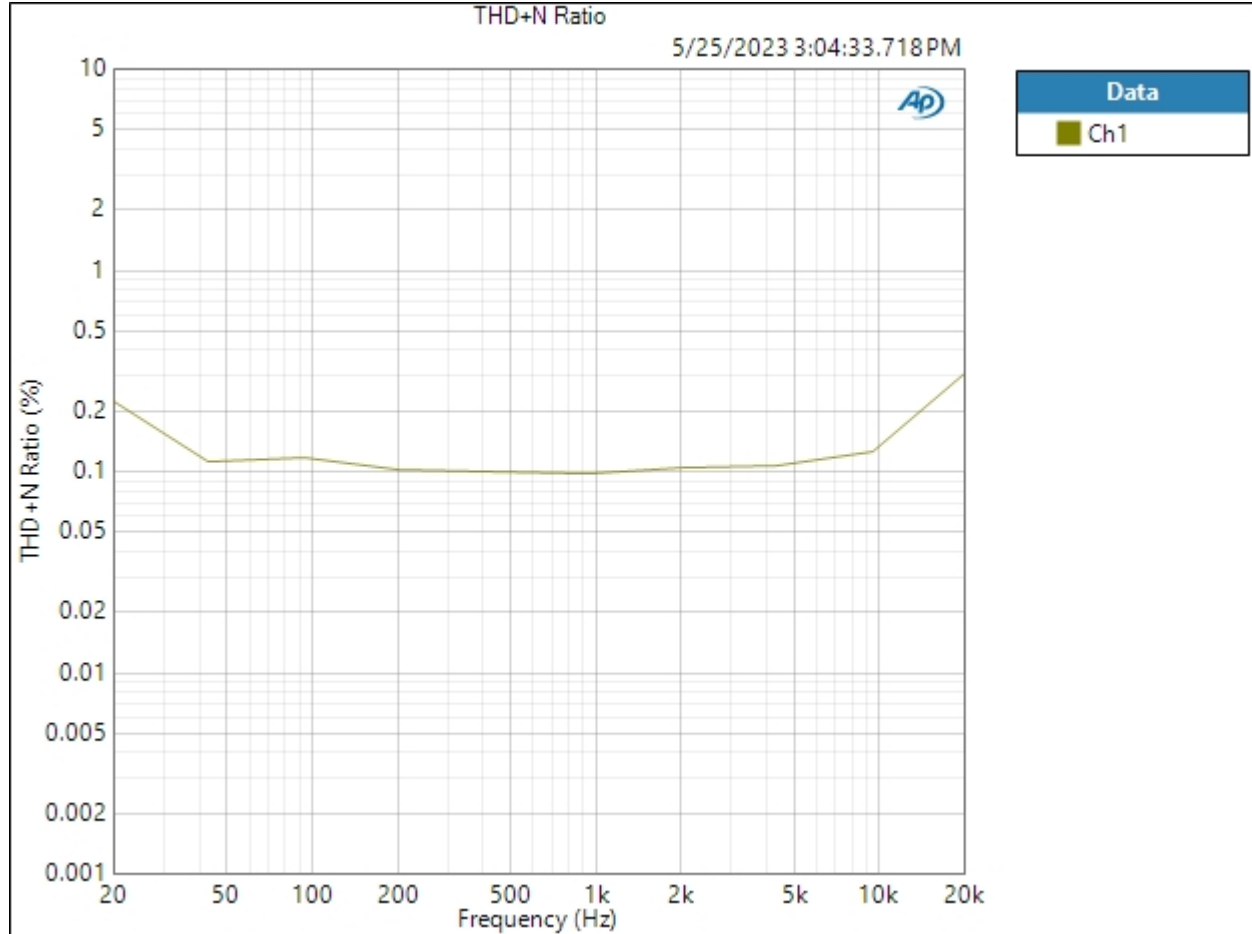

Result: PASSED

THD Ratio (5/25/2023 3:04:33.718 PM)

## Sequence Report

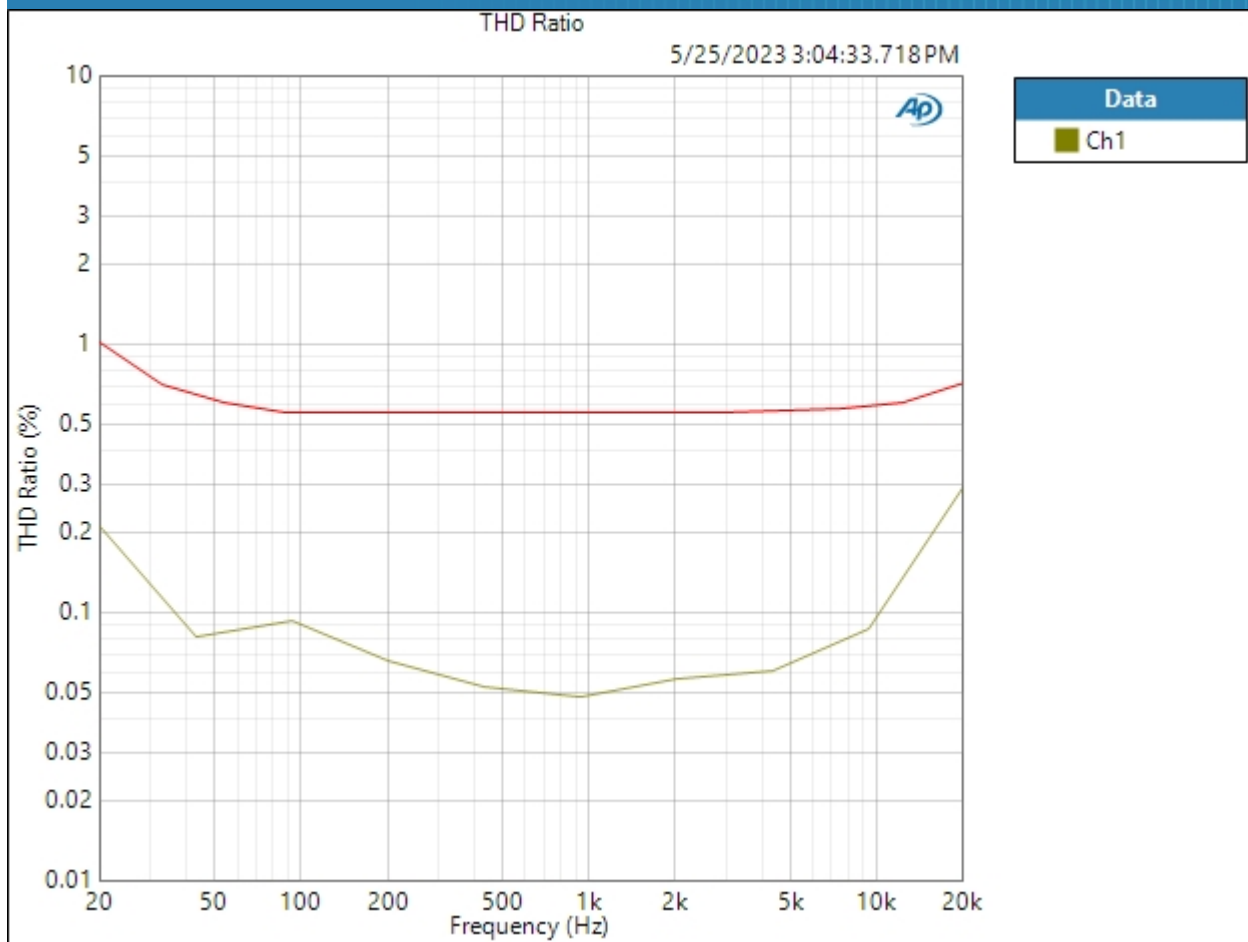

Ch1 PASSED

Result: PASSED

## Sequence Report



### Mic 2k 200k termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

#### • References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

#### • DCX

DCX is not detected.



## Sequence Report



Mic 2k 200k termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 3:04:39.252 PM)

Ch1 2.658 mVrms

Gain (5/25/2023 3:04:39.252 PM)

Ch1 -6.986 dB

THD+N Ratio (5/25/2023 3:04:39.252 PM)

Ch1 ---- %

Frequency (5/25/2023 3:04:39.252 PM)

Ch1 ---- Hz

## Sequence Report



Mic 2k 200k termination : Stepped Frequency Sweep MIC 2K

Generator Level: -42.300 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/25/2023 3:04:45 PM

RMS Level (5/25/2023 3:04:45.002 PM)

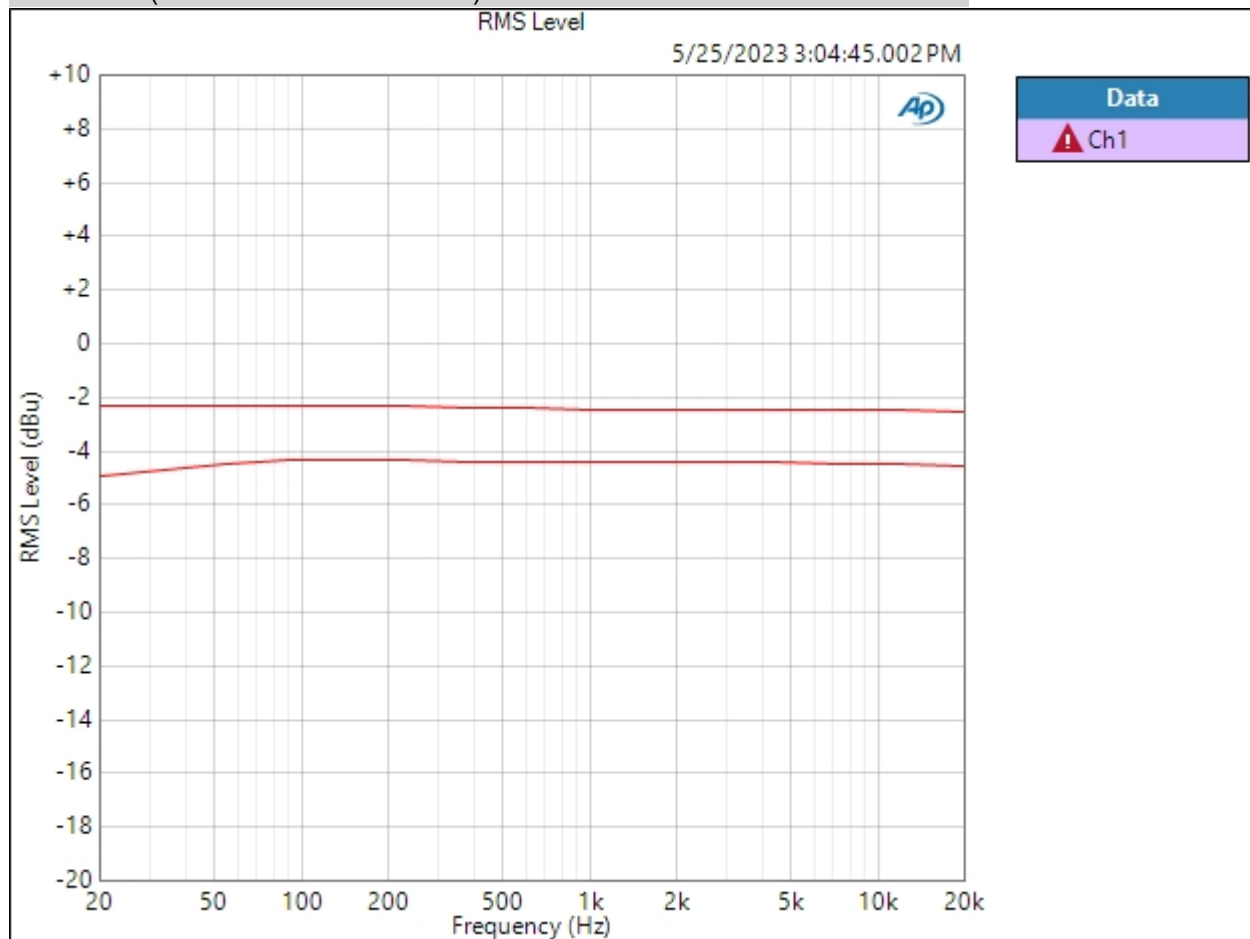


Ch1 Failed Lower Limit

## Sequence Report



Result: ▲ FAILED

THD Ratio (5/25/2023 3:04:45.002 PM)

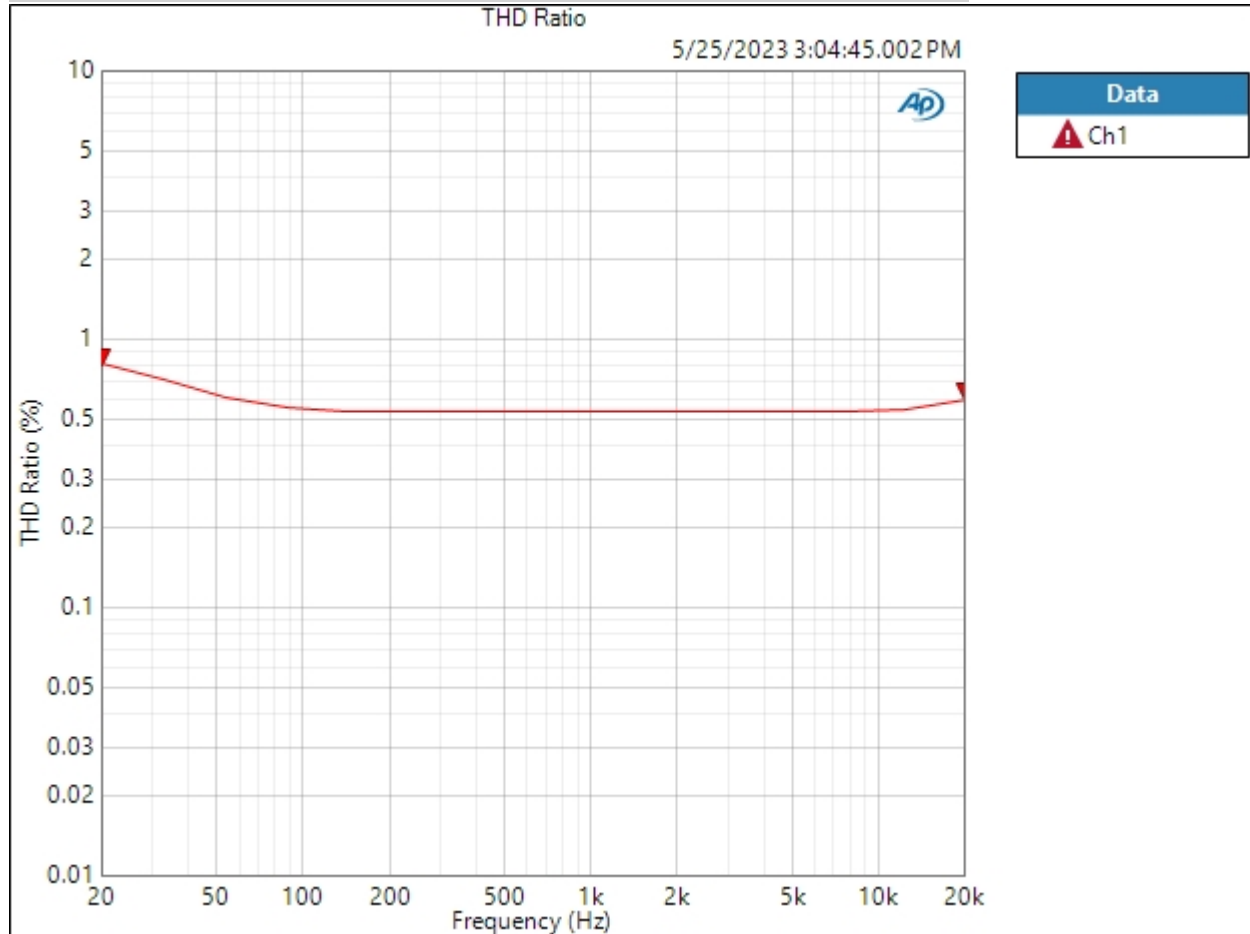

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

## Sequence Report



Mic 2k 15dB PAD 200k termination : Signal Path Setup

Output Connector: Analog Balanced  
Channels: 1  
Source Impedance: 100 ohm  
Output EQ: None  
Input Connector: Analog Balanced  
Channels: 1  
Channel: Ch1  
Termination: 200 kohm  
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)  
Device Delay: 0.000 s  
Input EQ: None

### • References

dBr G: 100.0 mVrms  
dBm (Output Power): 600.0 ohm  
W(watts) (Output Power): 8.000 ohm  
Shared Frequency Reference: 1.00000 kHz  
dBrA: 1.000 Vrms  
dBrB: 1.000 Vrms  
dBrA Offset: 0.000 dB  
dBrB Offset: 0.000 dB  
dBSPL1: 10.00 mVrms  
dBSPL2: 10.00 mVrms  
dBSPL1 Calibrator Level: 94.000 dB SPL  
dBSPL2 Calibrator Level: 94.000 dB SPL  
dBm (Input Power): 600.0 ohm  
W(watts) (Input Power): 8.000 ohm

### • DCX

DCX is not detected.

## Sequence Report



Mic 2k 15dB PAD 200k termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 3:04:50.358 PM)

Ch1 3.309 mVrms

Gain (5/25/2023 3:04:50.358 PM)

Ch1 -5.111 dB

THD+N Ratio (5/25/2023 3:04:50.358 PM)

Ch1 ---- %

Frequency (5/25/2023 3:04:50.358 PM)

Ch1 ---- Hz

## Sequence Report



Mic 2k 15dB PAD 200k termination : Stepped Frequency Sweep 15dB PAD

Generator Level: -42.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/25/2023 3:04:56 PM

RMS Level (5/25/2023 3:04:56.800 PM)

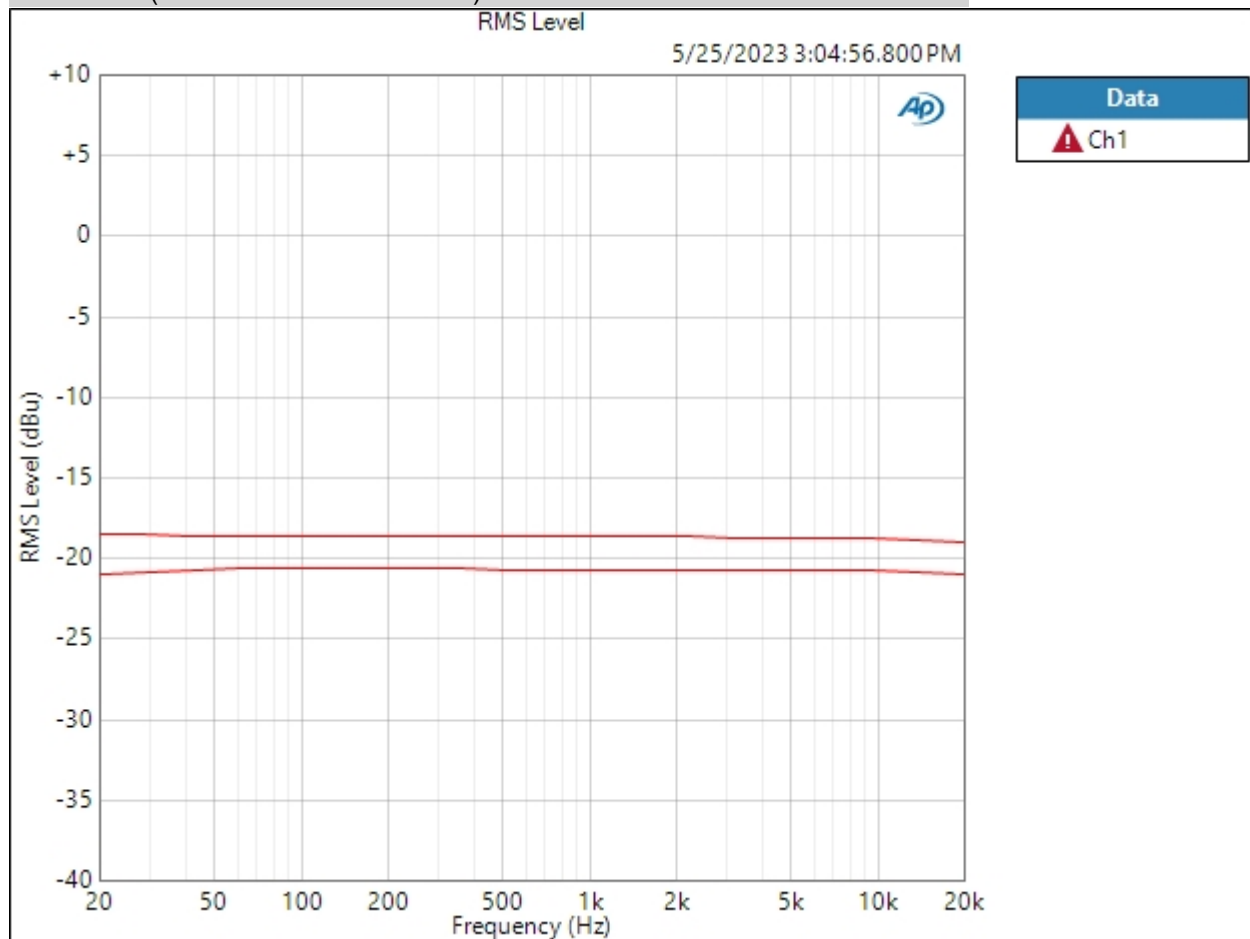

Ch1 Failed Lower Limit

5/25/2023 3:07 PM


Page 14 of 45

## Sequence Report



Result: ▲ FAILED

THD Ratio (5/25/2023 3:04:56.800 PM)

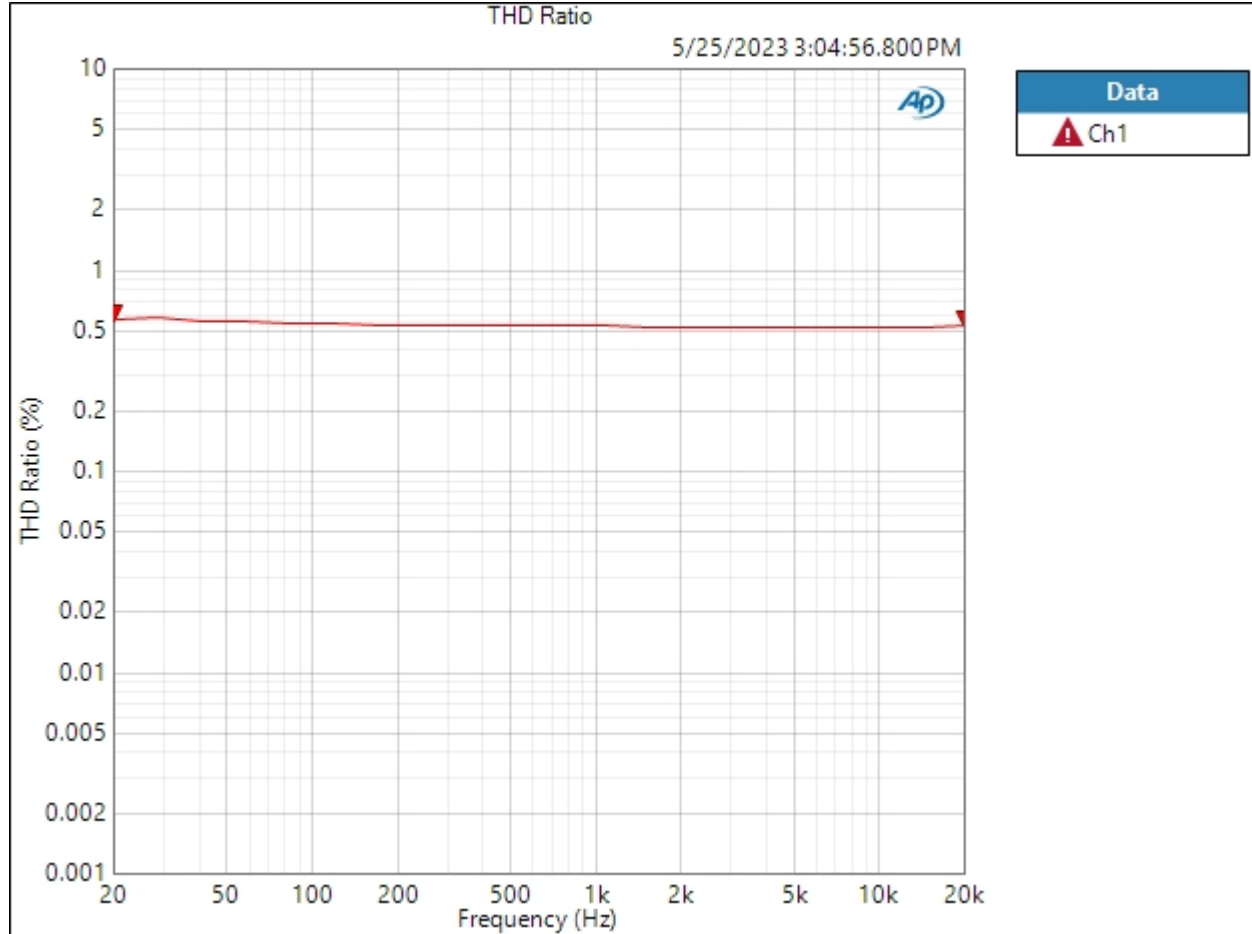

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

## Sequence Report



### Line Gain -10 200kTermination : Signal Path Setup

Output Connector: Analog Balanced  
Channels: 1  
Source Impedance: 100 ohm  
Output EQ: None  
Input Connector: Analog Balanced  
Channels: 1  
Channel: Ch1  
Termination: 200 kohm  
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)  
Device Delay: 0.000 s  
Input EQ: None

#### • References

dBr G: 100.0 mVrms  
dBm (Output Power): 600.0 ohm  
W(watts) (Output Power): 8.000 ohm  
Shared Frequency Reference: 1.00000 kHz  
dBrA: 1.000 Vrms  
dBrB: 1.000 Vrms  
dBrA Offset: 0.000 dB  
dBrB Offset: 0.000 dB  
dBSPL1: 10.00 mVrms  
dBSPL2: 10.00 mVrms  
dBSPL1 Calibrator Level: 94.000 dB SPL  
dBSPL2 Calibrator Level: 94.000 dB SPL  
dBm (Input Power): 600.0 ohm  
W(watts) (Input Power): 8.000 ohm

#### • DCX

DCX is not detected.



## Sequence Report



Line Gain -10 200kTermination : Verify Connections

Waveform: Sine

Generator Level: 0.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 3:05:02.937 PM)

Ch1 1.398 Vrms

Gain (5/25/2023 3:05:02.937 PM)

Ch1 5.128 dB

THD+N Ratio (5/25/2023 3:05:02.937 PM)

Ch1 0.122832 %

Frequency (5/25/2023 3:05:02.937 PM)

Ch1 1.00000 kHz

## Sequence Report



Line Gain -10 200kTermination : Stepped Frequency Sweep -10

Generator Level: 0.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/25/2023 3:05:12 PM

RMS Level (5/25/2023 3:05:12.795 PM)

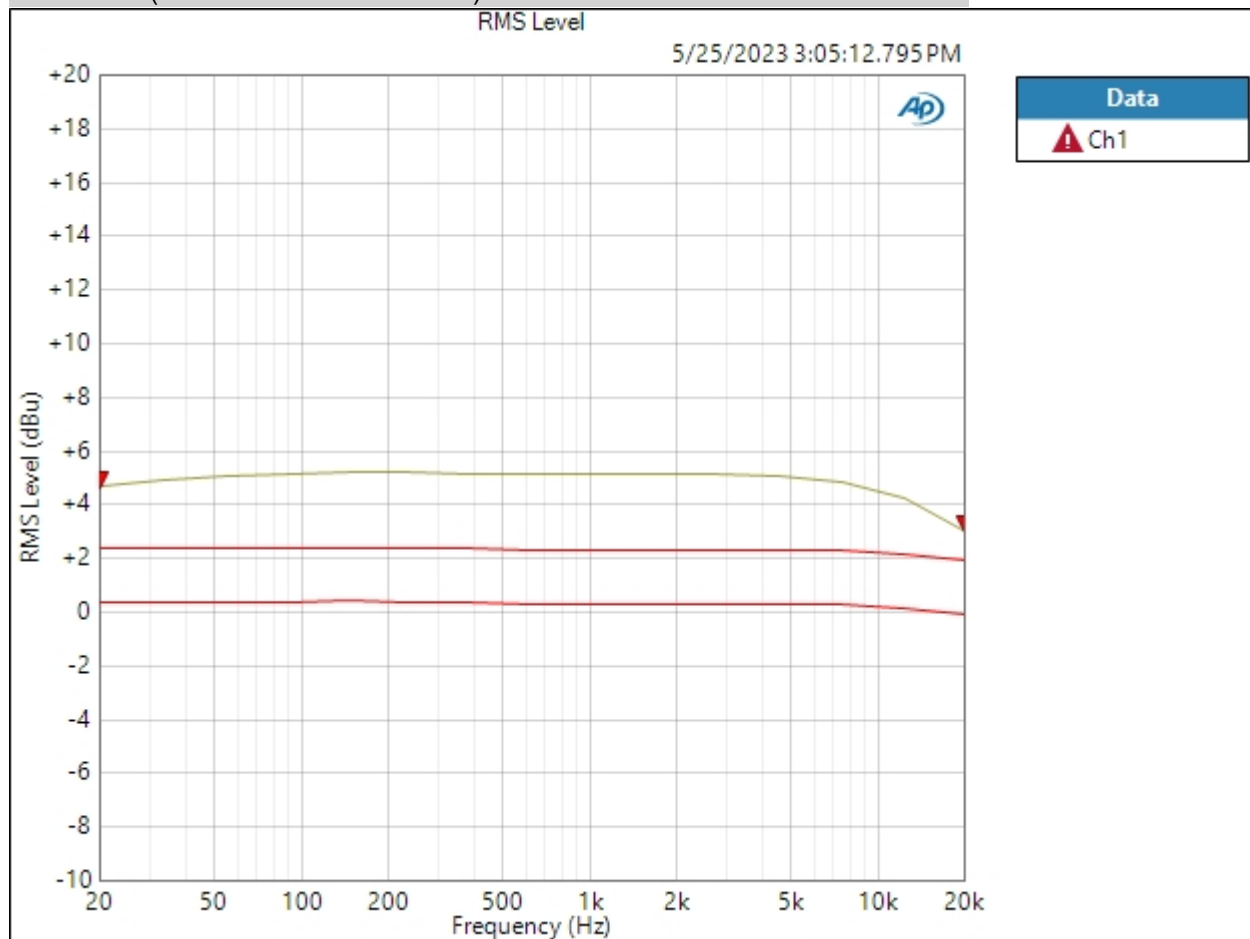

Ch1 Failed Upper Limit

5/25/2023 3:07 PM


Page 18 of 45

# Sequence Report



Result: ▲ FAILED

THD+N Ratio (5/25/2023 3:05:12.795 PM)

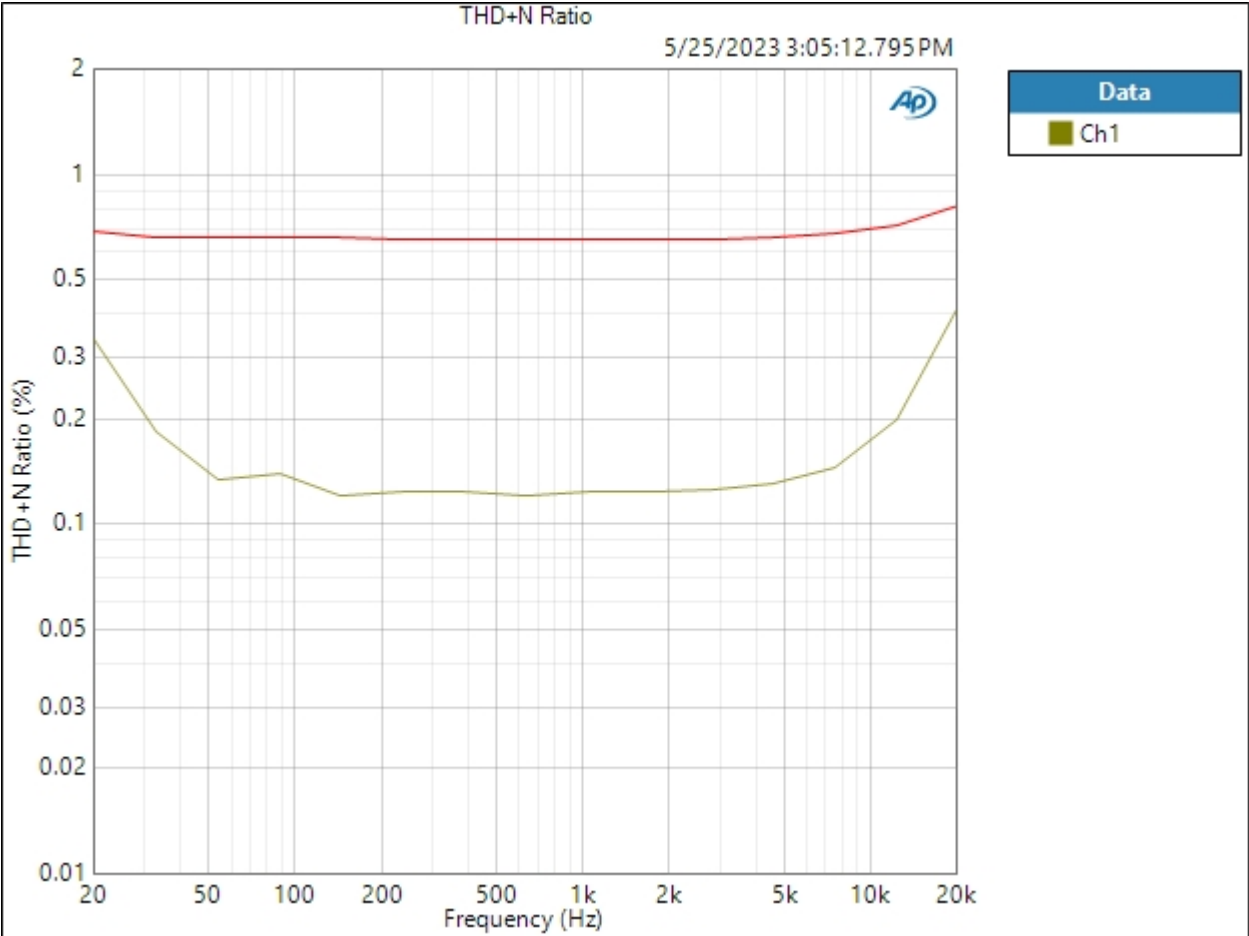

Ch1 ✔ PASSED

Result: ✔ PASSED

## Sequence Report



### Line Gain -10 600 Termination : Signal Path Setup

Output Connector: Analog Balanced  
Channels: 1  
Source Impedance: 100 ohm  
Output EQ: None  
Input Connector: Analog Balanced  
Channels: 1  
Channel: Ch1  
Termination: 600 ohm  
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)  
Device Delay: 0.000 s  
Input EQ: None

#### • References

dBr G: 100.0 mVrms  
dBm (Output Power): 600.0 ohm  
W(watts) (Output Power): 8.000 ohm  
Shared Frequency Reference: 1.00000 kHz  
dBrA: 1.000 Vrms  
dBrB: 1.000 Vrms  
dBrA Offset: 0.000 dB  
dBrB Offset: 0.000 dB  
dBSPL1: 10.00 mVrms  
dBSPL2: 10.00 mVrms  
dBSPL1 Calibrator Level: 94.000 dB SPL  
dBSPL2 Calibrator Level: 94.000 dB SPL  
dBm (Input Power): 600.0 ohm  
W(watts) (Input Power): 8.000 ohm

#### • DCX

DCX is not detected.

## Sequence Report



### Line Gain -10 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 3:05:18.803 PM)

Ch1 388.7 mVrms

Gain (5/25/2023 3:05:18.803 PM)

Ch1 4.010 dB

THD+N Ratio (5/25/2023 3:05:18.803 PM)

Ch1 0.251297 %

Frequency (5/25/2023 3:05:18.803 PM)

Ch1 1.00000 kHz

### Line Gain -10 600 Termination : Level and Gain -10


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 3:05:21.960 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-11.500 dBu	-5.990 dBu	-8.500 dBu	

Result:  FAILED

## Sequence Report



### Line Gain +5 200kTermination : Signal Path Setup

Output Connector: Analog Balanced  
Channels: 1  
Source Impedance: 100 ohm  
Output EQ: None  
Input Connector: Analog Balanced  
Channels: 1  
Channel: Ch1  
Termination: 200 kohm  
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)  
Device Delay: 0.000 s  
Input EQ: None

#### • References

dBr G: 100.0 mVrms  
dBm (Output Power): 600.0 ohm  
W(watts) (Output Power): 8.000 ohm  
Shared Frequency Reference: 1.00000 kHz  
dBrA: 1.000 Vrms  
dBrB: 1.000 Vrms  
dBrA Offset: 0.000 dB  
dBrB Offset: 0.000 dB  
dBSPL1: 10.00 mVrms  
dBSPL2: 10.00 mVrms  
dBSPL1 Calibrator Level: 94.000 dB SPL  
dBSPL2 Calibrator Level: 94.000 dB SPL  
dBm (Input Power): 600.0 ohm  
W(watts) (Input Power): 8.000 ohm

#### • DCX

DCX is not detected.

## Sequence Report



Line Gain +5 200kTermination : Verify Connections

Waveform: Sine

Generator Level: 0.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 3:05:27.726 PM)

Ch1 7.432 Vrms

Gain (5/25/2023 3:05:27.726 PM)

Ch1 19.660 dB

THD+N Ratio (5/25/2023 3:05:27.726 PM)

Ch1 0.856390 %

Frequency (5/25/2023 3:05:27.726 PM)

Ch1 1.00000 kHz

## Sequence Report



Line Gain +5 200kTermination : Stepped Frequency Sweep +5

Generator Level: 0.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/25/2023 3:05:36 PM

RMS Level (5/25/2023 3:05:36.418 PM)

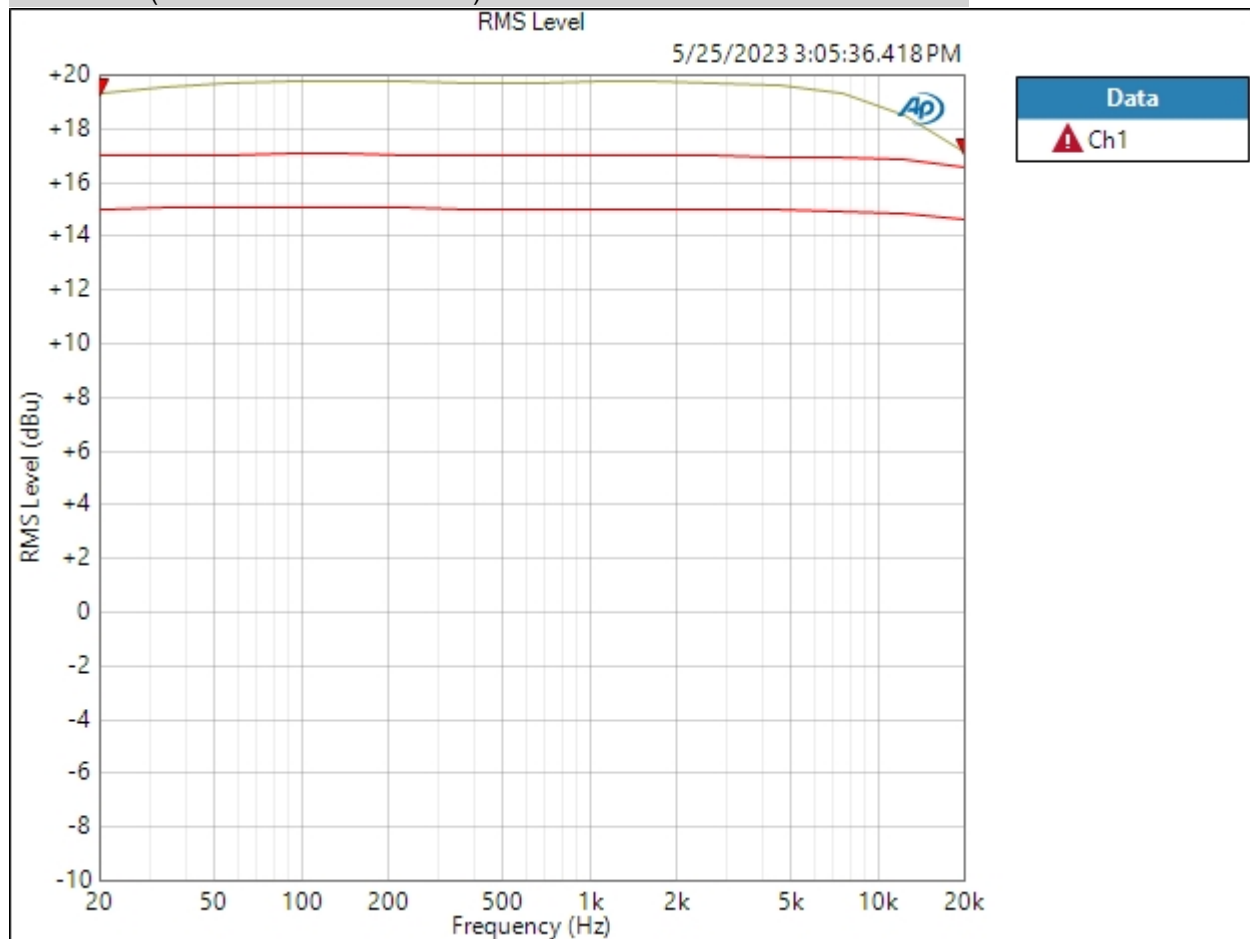

Ch1 Failed Upper Limit

5/25/2023 3:07 PM

Page 24 of 45




## Sequence Report



Result: ▲ FAILED

THD+N Ratio (5/25/2023 3:05:36.418 PM)

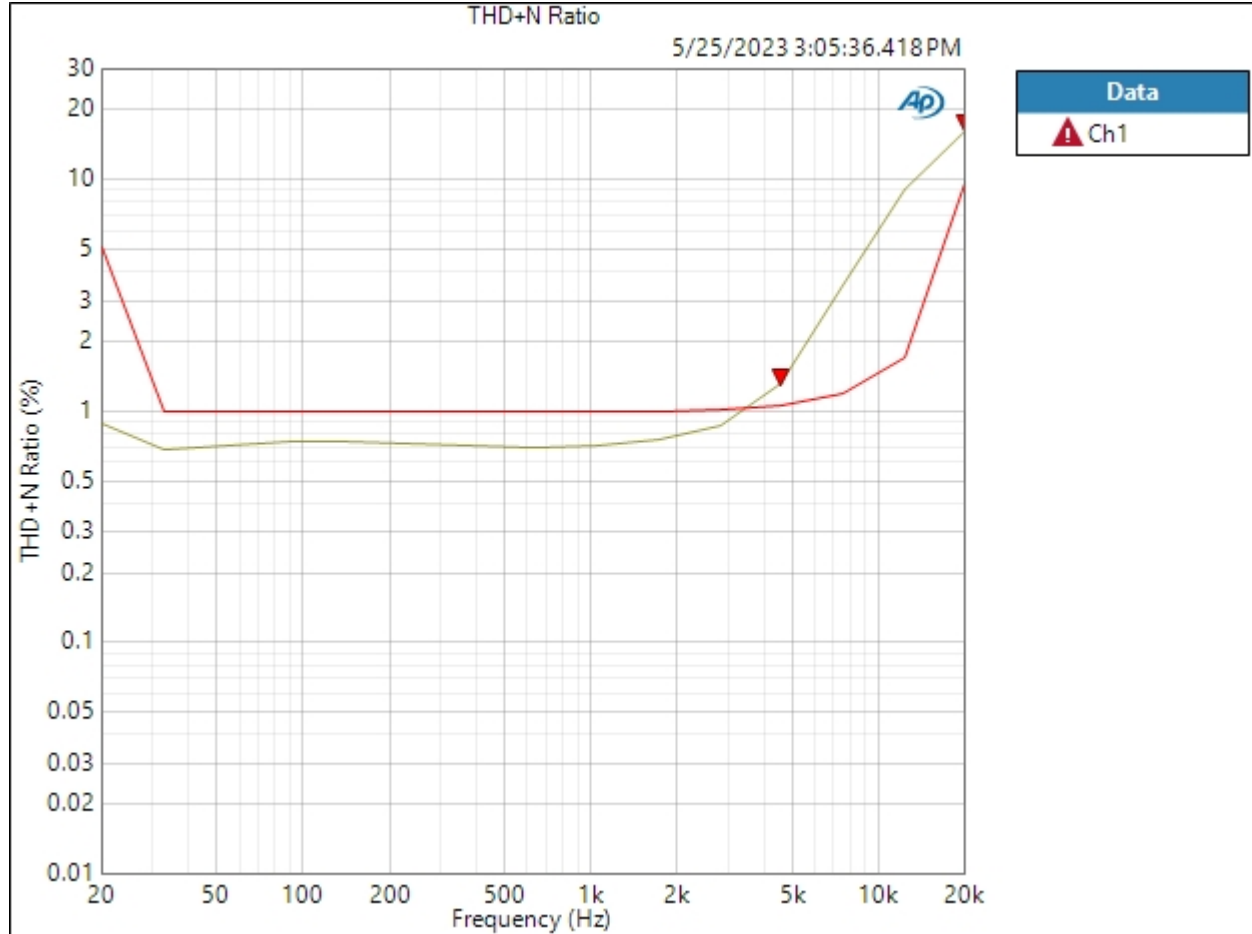

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

## Sequence Report



### Line Gain +5 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

#### • References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

#### • DCX

DCX is not detected.

## Sequence Report



### Line Gain +5 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 3:05:42.569 PM)

Ch1 2.095 Vrms

Gain (5/25/2023 3:05:42.569 PM)

Ch1 18.643 dB

THD+N Ratio (5/25/2023 3:05:42.569 PM)

Ch1 0.440777 %

Frequency (5/25/2023 3:05:42.569 PM)

Ch1 1.00000 kHz

### Line Gain +5 600 Termination : Level and Gain +5


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 3:05:45.958 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	+3.500 dBu	+8.642 dBu	+6.500 dBu	

Result:  FAILED

## Sequence Report



### Line Gain -5 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

#### • References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

#### • DCX

DCX is not detected.

## Sequence Report



### Line Gain -5 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 3:05:51.804 PM)

Ch1 650.0 mVrms

Gain (5/25/2023 3:05:51.804 PM)

Ch1 8.477 dB

THD+N Ratio (5/25/2023 3:05:51.804 PM)

Ch1 0.270550 %

Frequency (5/25/2023 3:05:51.804 PM)

Ch1 1.00000 kHz

### Line Gain -5 600 Termination : Level and Gain -5


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 3:05:55.010 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-6.500 dBu	-1.524 dBu	-3.500 dBu	

Result:  FAILED

## Sequence Report



### Line Gain 0 600 Termination : Signal Path Setup

Output Connector: Analog Balanced  
Channels: 1  
Source Impedance: 100 ohm  
Output EQ: None  
Input Connector: Analog Balanced  
Channels: 1  
Channel: Ch1  
Termination: 600 ohm  
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)  
Device Delay: 0.000 s  
Input EQ: None

#### • References

dBr G: 100.0 mVrms  
dBm (Output Power): 600.0 ohm  
W(watts) (Output Power): 8.000 ohm  
Shared Frequency Reference: 1.00000 kHz  
dBrA: 1.000 Vrms  
dBrB: 1.000 Vrms  
dBrA Offset: 0.000 dB  
dBrB Offset: 0.000 dB  
dBSPL1: 10.00 mVrms  
dBSPL2: 10.00 mVrms  
dBSPL1 Calibrator Level: 94.000 dB SPL  
dBSPL2 Calibrator Level: 94.000 dB SPL  
dBm (Input Power): 600.0 ohm  
W(watts) (Input Power): 8.000 ohm

#### • DCX

DCX is not detected.

## Sequence Report



### Line Gain 0 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 3:06:01.080 PM)

Ch1 1.133 Vrms

Gain (5/25/2023 3:06:01.080 PM)

Ch1 13.306 dB

THD+N Ratio (5/25/2023 3:06:01.080 PM)

Ch1 0.294349 %

Frequency (5/25/2023 3:06:01.080 PM)

Ch1 1.00000 kHz

### Line Gain 0 600 Termination : Level and Gain 0


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 3:06:04.763 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-1.500 dBu	+3.306 dBu	+1.500 dBu	

Result:  FAILED

## Sequence Report



### Line Gain +10 600 Termination : Signal Path Setup

Output Connector: Analog Balanced  
Channels: 1  
Source Impedance: 100 ohm  
Output EQ: None  
Input Connector: Analog Balanced  
Channels: 1  
Channel: Ch1  
Termination: 600 ohm  
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)  
Device Delay: 0.000 s  
Input EQ: None

#### • References

dBr G: 100.0 mVrms  
dBm (Output Power): 600.0 ohm  
W(watts) (Output Power): 8.000 ohm  
Shared Frequency Reference: 1.00000 kHz  
dBrA: 1.000 Vrms  
dBrB: 1.000 Vrms  
dBrA Offset: 0.000 dB  
dBrB Offset: 0.000 dB  
dB SPL1: 10.00 mVrms  
dB SPL2: 10.00 mVrms  
dB SPL1 Calibrator Level: 94.000 dB SPL  
dB SPL2 Calibrator Level: 94.000 dB SPL  
dBm (Input Power): 600.0 ohm  
W(watts) (Input Power): 8.000 ohm

#### • DCX

DCX is not detected.



## Sequence Report



### Line Gain +10 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 3:06:10.730 PM)

Ch1 3.675 Vrms

Gain (5/25/2023 3:06:10.730 PM)

Ch1 23.524 dB

THD+N Ratio (5/25/2023 3:06:10.730 PM)

Ch1 0.743468 %

Frequency (5/25/2023 3:06:10.730 PM)

Ch1 1.00000 kHz

### Line Gain +10 600 Termination : Level and Gain +10

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 3:06:14.009 PM)

Channel	Lower Limit	Value	Upper Limit
Ch1	+8.500 dBu	+13.524 dBu	+11.500 dBu



Result: FAILED

## Sequence Report



Line Gain +10 200k Termination Level Hi : Signal Path Setup

Output Connector: Analog Balanced  
Channels: 1  
Source Impedance: 100 ohm  
Output EQ: None  
Input Connector: Analog Balanced  
Channels: 1  
Channel: Ch1  
Termination: 200 kohm  
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)  
Device Delay: 0.000 s  
Input EQ: None

### • References

dBr G: 100.0 mVrms  
dBm (Output Power): 600.0 ohm  
W(watts) (Output Power): 8.000 ohm  
Shared Frequency Reference: 1.00000 kHz  
dBrA: 1.000 Vrms  
dBrB: 1.000 Vrms  
dBrA Offset: 0.000 dB  
dBrB Offset: 0.000 dB  
dBSPL1: 10.00 mVrms  
dBSPL2: 10.00 mVrms  
dBSPL1 Calibrator Level: 94.000 dB SPL  
dBSPL2 Calibrator Level: 94.000 dB SPL  
dBm (Input Power): 600.0 ohm  
W(watts) (Input Power): 8.000 ohm

### • DCX

DCX is not detected.

## Sequence Report



Line Gain +10 200k Termination Level Hi : Verify Connections

Waveform: Sine

Generator Level: -20.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 3:06:19.927 PM)

Ch1 1.330 Vrms

Gain (5/25/2023 3:06:19.927 PM)

Ch1 24.694 dB

THD+N Ratio (5/25/2023 3:06:19.927 PM)

Ch1 0.882516 %

Frequency (5/25/2023 3:06:19.927 PM)

Ch1 1.00000 kHz


## Sequence Report



Line Gain +10 200k Termination Level Hi : Noise Recorder (RMS) CW

Waveform: None  
Low-pass Filter: 20 kHz  
Weighting Filter: Signal Path  
High-pass Filter: 20 Hz  
Sweep Time: 0.00:00:03.000  
Reading Rate: 10/sec  
Input Bandwidth: Use Signal Path  
Record Acquisition: False  
Measured 1 5/25/2023 3:06:25 PM

RMS Level (5/25/2023 3:06:25.071 PM)

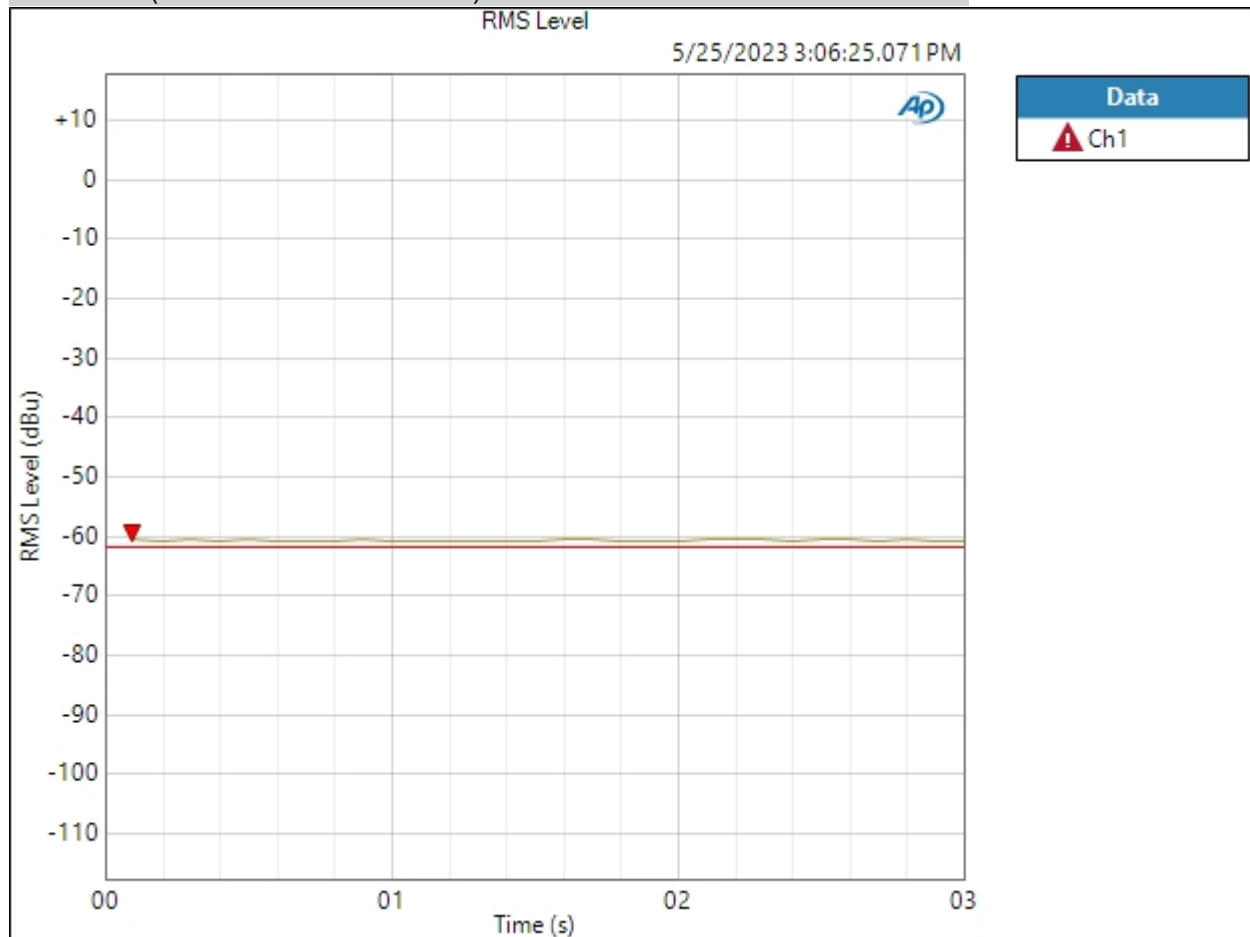

Ch1 Failed Upper Limit

Result: FAILED

5/25/2023 3:07 PM

Page 36 of 45

## Line Gain +10 200k Termination Level Low : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

## • References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

## • DCX

DCX is not detected.

## Sequence Report



Line Gain +10 200k Termination Level Low : Verify Connections

Waveform: Sine

Generator Level: -20.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 3:06:31.156 PM)

Ch1 89.11 uVrms

Gain (5/25/2023 3:06:31.156 PM)

Ch1 -58.731 dB

THD+N Ratio (5/25/2023 3:06:31.156 PM)

Ch1 ---- %

Frequency (5/25/2023 3:06:31.156 PM)

Ch1 ---- Hz


## Sequence Report



Line Gain +10 200k Termination Level Low : Noise Recorder (RMS) CCW

Waveform: None  
Low-pass Filter: 20 kHz  
Weighting Filter: Signal Path  
High-pass Filter: 20 Hz  
Sweep Time: 0.00:00:03.000  
Reading Rate: 10/sec  
Input Bandwidth: Use Signal Path  
Record Acquisition: False  
Measured 1 5/25/2023 3:06:37 PM

RMS Level (5/25/2023 3:06:37.089 PM)

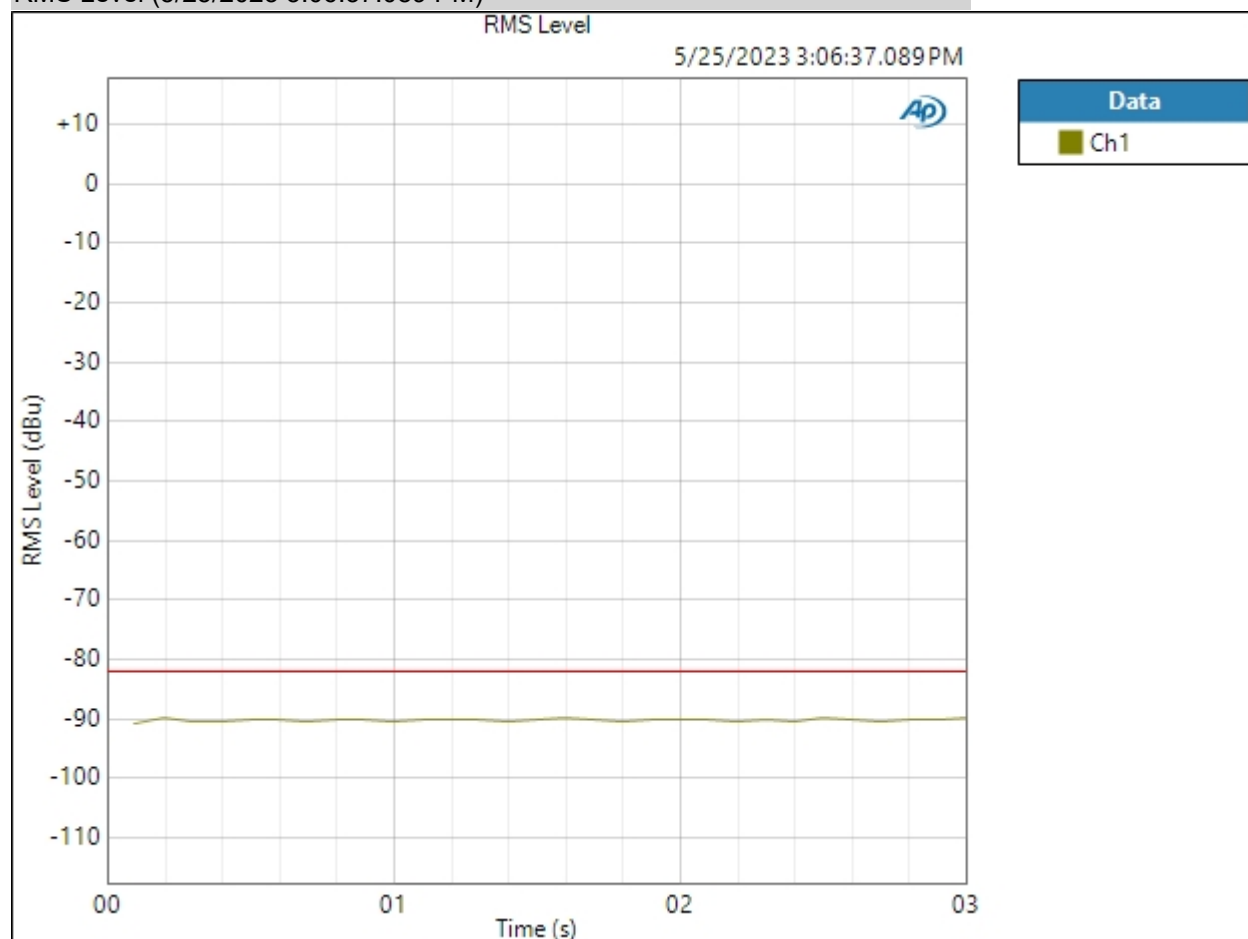

Ch1 PASSED

Result: PASSED

5/25/2023 3:07 PM

## Hi Z Gain -10 2.2M 200k Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	2
Source Impedance:	100 ohm
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

## • References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

## • DCX

DCX is not detected.



## Sequence Report



### Hi Z Gain -10 2.2M 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 3:06:42.644 PM)

Ch1 1.229 mVrms

Gain (5/25/2023 3:06:42.644 PM)

Ch1 -33.703 dB

THD+N Ratio (5/25/2023 3:06:42.644 PM)

Ch1 ---- %

Frequency (5/25/2023 3:06:42.644 PM)

Ch1 ---- Hz

### Hi Z Gain -10 2.2M 200k Termination : Level and Gain 2.2M

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 3:06:46.590 PM)

Channel	Lower Limit	Value	Upper Limit
Ch1	-2.000 dBu	-17.175 dBu	+2.000 dBu



Result: FAILED

## Sequence Report



Hi Z Gain -10 47k 200k Termination : Signal Path Setup

Output Connector: Analog Balanced  
Channels: 2  
Source Impedance: 100 ohm  
Output EQ: None  
Input Connector: Analog Balanced  
Channels: 1  
Channel: Ch1  
Termination: 200 kohm  
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)  
Device Delay: 0.000 s  
Input EQ: None

• References

dBr G: 100.0 mVrms  
dBm (Output Power): 600.0 ohm  
W(watts) (Output Power): 8.000 ohm  
Shared Frequency Reference: 1.00000 kHz  
dBrA: 1.000 Vrms  
dBrB: 1.000 Vrms  
dBrA Offset: 0.000 dB  
dBrB Offset: 0.000 dB  
dBSPL1: 10.00 mVrms  
dBSPL2: 10.00 mVrms  
dBSPL1 Calibrator Level: 94.000 dB SPL  
dBSPL2 Calibrator Level: 94.000 dB SPL  
dBm (Input Power): 600.0 ohm  
W(watts) (Input Power): 8.000 ohm

• DCX

DCX is not detected.

## Sequence Report



### Hi Z Gain -10 47k 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 3:06:52.483 PM)

Ch1 8.387 Vrms

Gain (5/25/2023 3:06:52.483 PM)

Ch1 43.020 dB

THD+N Ratio (5/25/2023 3:06:52.483 PM)

Ch1 4.894439 %

Frequency (5/25/2023 3:06:52.483 PM)

Ch1 1.00000 kHz

### Hi Z Gain -10 47k 200k Termination : Level and Gain 47K

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 3:06:55.961 PM)

Channel	Lower Limit	Value	Upper Limit
Ch1	-8.000 dBu	+20.671 dBu	-4.000 dBu



Result: FAILED

## Sequence Report



### Dummy Signal Path For Report : Signal Path Setup

Output Connector:	Analog Unbalanced
Channels:	2
Source Impedance:	50 ohm
Output EQ:	None
Input Connector:	Analog Unbalanced
Channels:	2
Termination:	100 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

#### • References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

#### • DCX

DCX is not detected.

## Sequence Report



Dummy Signal Path For Report : Verify Connections

Waveform: Sine

Generator Level: 100.0 mVrms

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/25/2023 3:07:00.038 PM)

Ch1 7.238 uVrms

Ch2 7.376 uVrms