

Sequence Report



Summary

Mic500 200k Termination

Signal Path Setup PASSED

Stepped Frequency Sweep MIC 500 FAILED

Mic 2k 200k termination

Signal Path Setup PASSED

Stepped Frequency Sweep MIC 2K FAILED

Mic 2k 15dB PAD 200k termination

Signal Path Setup PASSED

Stepped Frequency Sweep 15dB PAD FAILED

Line Gain -10 200kTermination

Signal Path Setup PASSED

Stepped Frequency Sweep -10 FAILED

Line Gain -10 600 Termination

Signal Path Setup PASSED

Level and Gain -10 PASSED

Line Gain +5 200kTermination

Signal Path Setup PASSED

Stepped Frequency Sweep +5 FAILED

Line Gain +5 600 Termination

Signal Path Setup PASSED

Level and Gain +5 FAILED

Line Gain -5 600 Termination

Signal Path Setup PASSED

Level and Gain -5 FAILED

Line Gain 0 600 Termination

Signal Path Setup PASSED

Level and Gain 0 FAILED

Line Gain +10 600 Termination

Signal Path Setup PASSED

Level and Gain +10 FAILED

Line Gain +10 200k Termination Level Hi

Signal Path Setup PASSED

Noise Recorder (RMS) CW FAILED

Line Gain +10 200k Termination Level Low

Signal Path Setup PASSED

Noise Recorder (RMS) CCW FAILED

Hi Z Gain -10 2.2M 200k Termination

Signal Path Setup	✓ PASSED
Level and Gain 2.2M	⚠ FAILED
Hi Z Gain -10 47k 200k Termination	
Signal Path Setup	✓ PASSED
Level and Gain 47K	⚠ FAILED
Dummy Signal Path For Report	
Signal Path Setup	✓ PASSED
Sequence Result:	
Sequence Result:	⚠ FAILED

Sequence Report



Mic500 200k Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00

Sequence Report



Port C (hex): 00
Port D (hex): 00
• Clocks
Output Rate: Track Output SR
Sync Out Level: 3.300 V
Sync Out Polarity: Normal
Timebase Reference: Internal
Jitter: Disabled
• Triggers
Source: Off
Input Logic Level: 3.300 V
Edge: Rising

Mic500 200k Termination : Verify Connections

Waveform: Sine
Generator Level: -42.300 dBu
DC Offset: 0.000 V
Frequency: 1.00000 kHz

RMS Level (5/15/2023 6:11:11.121 PM)

Ch1 292.0 mVrms

Gain (5/15/2023 6:11:11.121 PM)

Ch1 33.827 dB

THD+N Ratio (5/15/2023 6:11:11.121 PM)

Ch1 ---- %

Frequency (5/15/2023 6:11:11.121 PM)

Ch1 ---- Hz

Sequence Report



Mic500 200k Termination : Stepped Frequency Sweep MIC 500

Generator Level: -42.300 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/15/2023 6:11:14 PM

RMS Level (5/15/2023 6:11:14.629 PM)

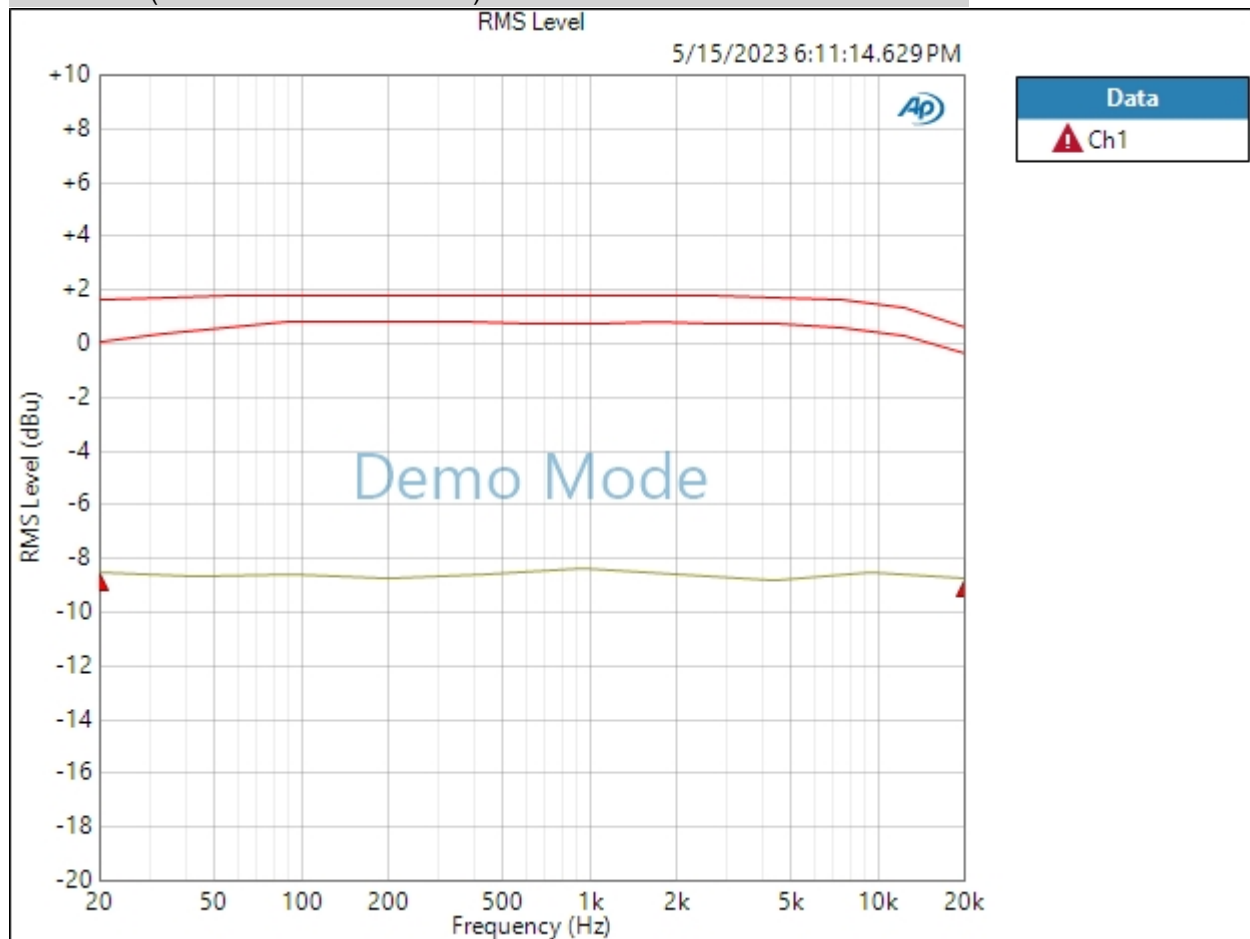


Ch1 Failed Lower Limit

Sequence Report



Result: ▲ FAILED


THD+N Ratio (5/15/2023 6:11:14.629 PM)

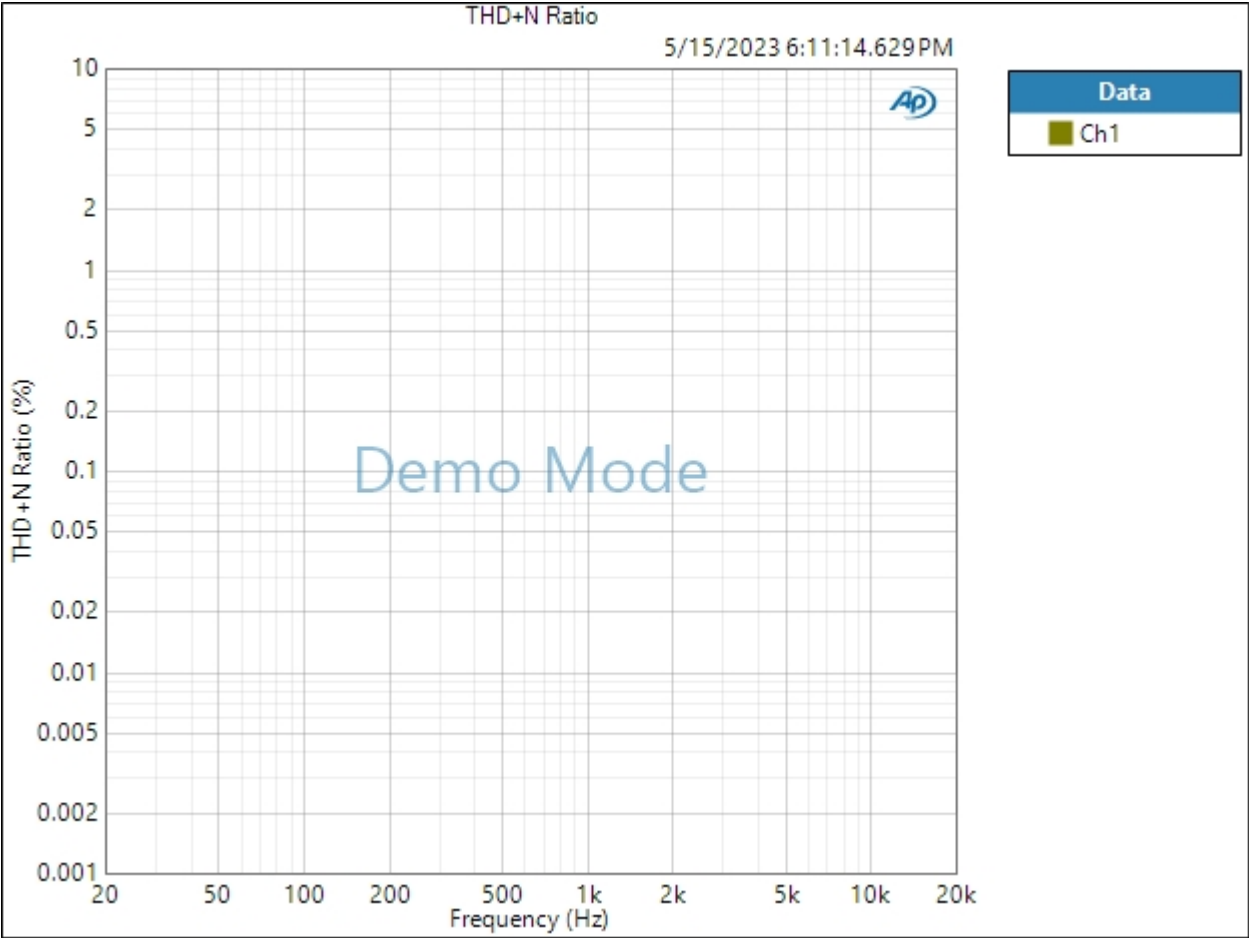

Result: ✔ PASSED

THD Ratio (5/15/2023 6:11:14.629 PM)

Sequence Report

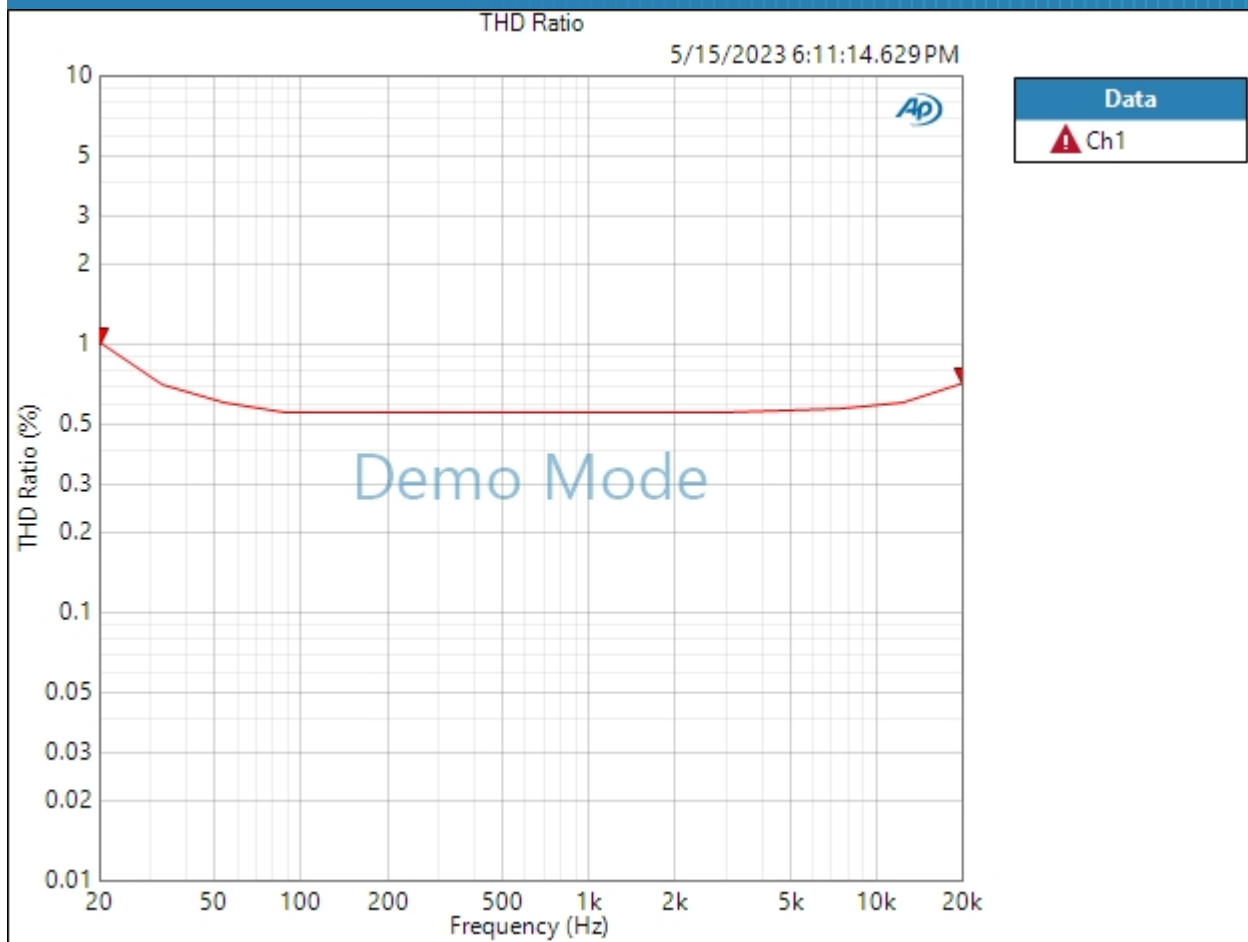

Ch1 Failed Upper Limit

Result: FAILED

Sequence Report



Mic 2k 200k termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 6:13 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Mic 2k 200k termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 6:11:19.567 PM)

Ch1 286.6 mVrms

Gain (5/15/2023 6:11:19.567 PM)

Ch1 33.663 dB

THD+N Ratio (5/15/2023 6:11:19.567 PM)

Ch1 ---- %

Frequency (5/15/2023 6:11:19.567 PM)

Ch1 ---- Hz

Sequence Report



Mic 2k 200k termination : Stepped Frequency Sweep MIC 2K

Generator Level: -42.300 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/15/2023 6:11:23 PM

RMS Level (5/15/2023 6:11:23.198 PM)

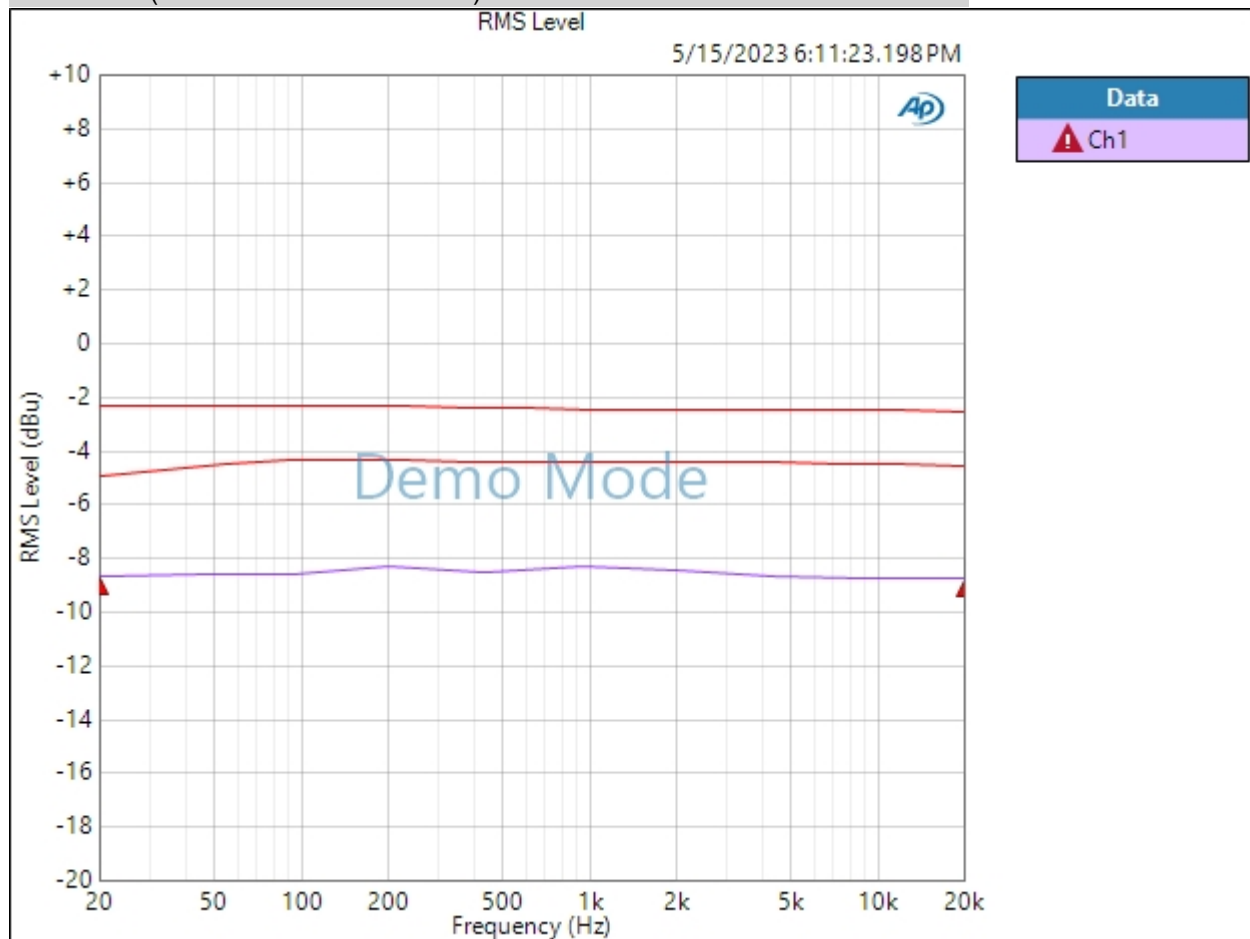


Sequence Report



Result: ▲ FAILED

THD Ratio (5/15/2023 6:11:23.198 PM)

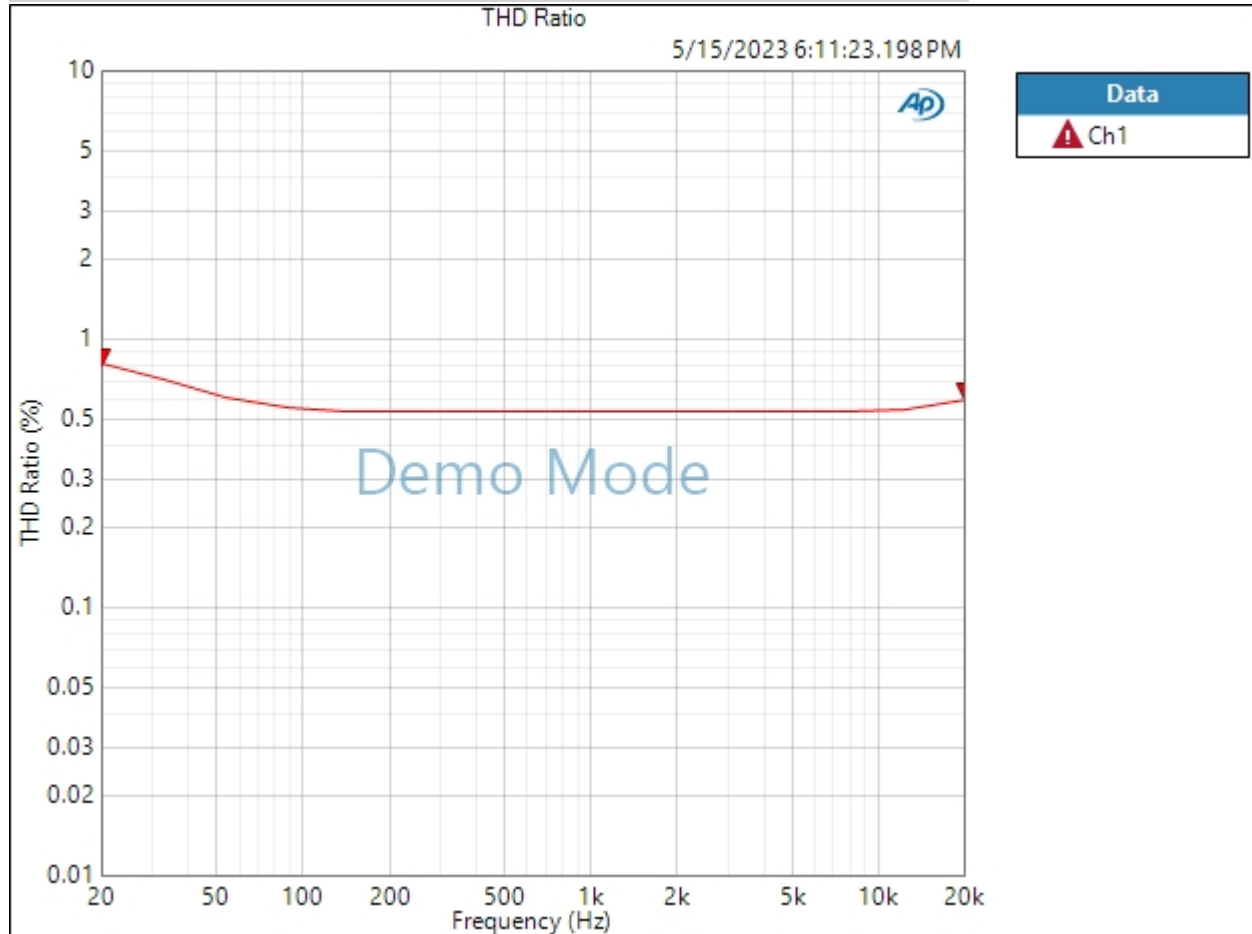

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

Sequence Report



Mic 2k 15dB PAD 200k termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
AG52 Generator Option: Installed
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

5/15/2023 6:13 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Mic 2k 15dB PAD 200k termination : Verify Connections

Waveform: Sine

Generator Level: -42.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 6:11:29.122 PM)

Ch1 286.8 mVrms

Gain (5/15/2023 6:11:29.122 PM)

Ch1 33.671 dB

THD+N Ratio (5/15/2023 6:11:29.122 PM)

Ch1 ---- %

Frequency (5/15/2023 6:11:29.122 PM)

Ch1 ---- Hz

Sequence Report



Mic 2k 15dB PAD 200k termination : Stepped Frequency Sweep 15dB PAD

Generator Level: -42.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 10


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/15/2023 6:11:33 PM

RMS Level (5/15/2023 6:11:33.270 PM)

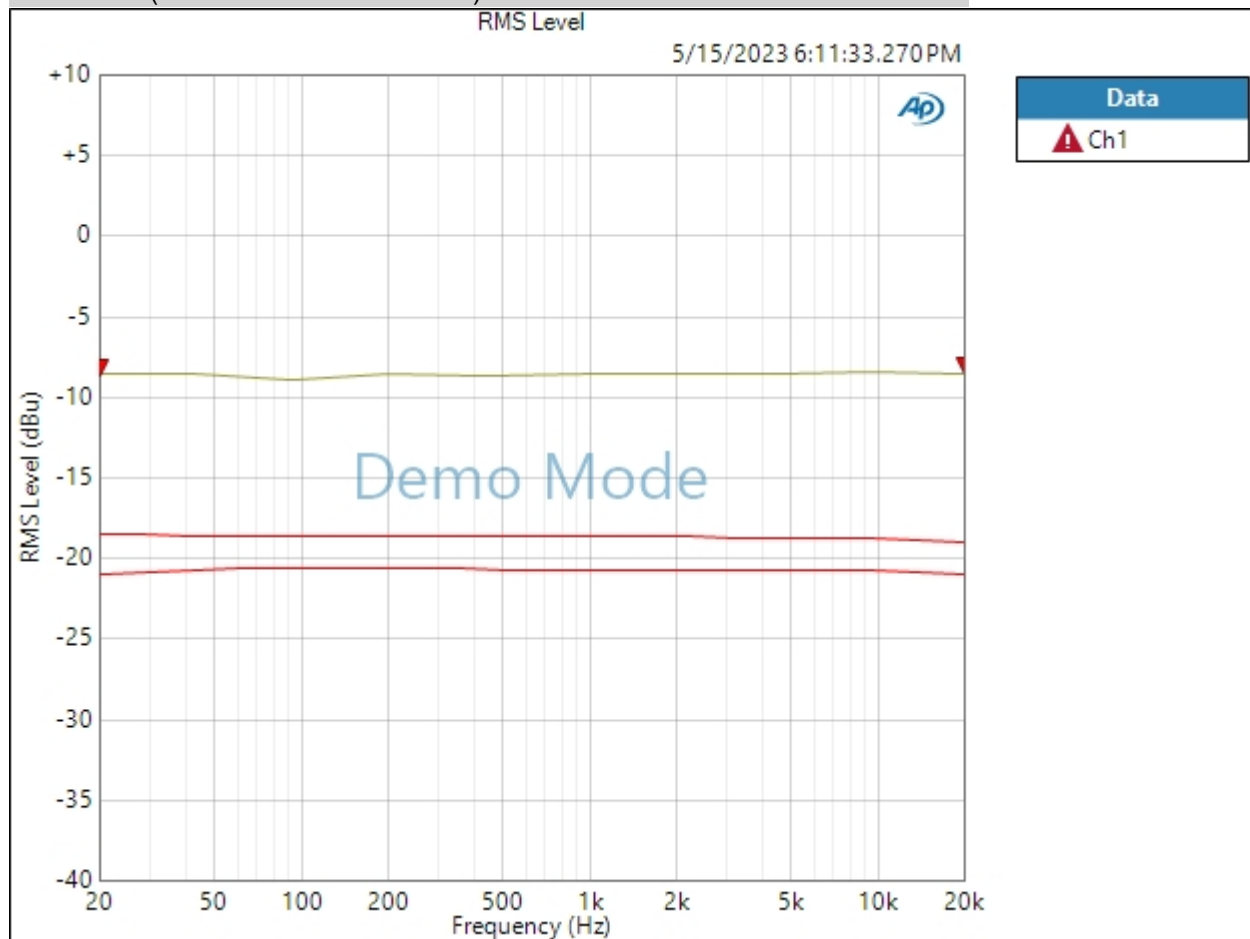


Ch1 Failed Upper Limit

Sequence Report



Result: ▲ FAILED

THD Ratio (5/15/2023 6:11:33.270 PM)

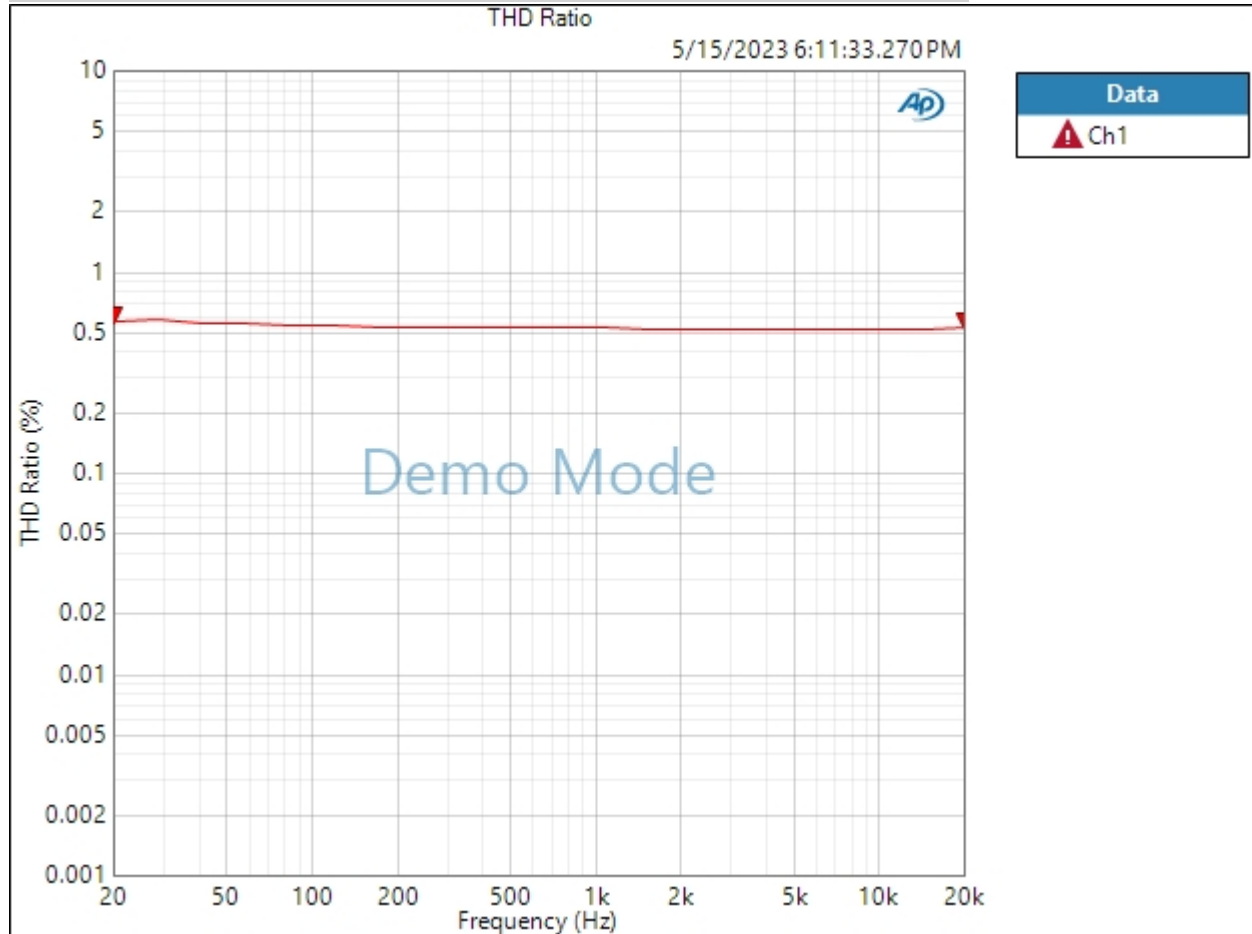

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

Sequence Report



Line Gain -10 200kTermination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 6:13 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain -10 200kTermination : Verify Connections

Waveform: Sine

Generator Level: 0.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 6:11:39.624 PM)

Ch1 295.6 mVrms

Gain (5/15/2023 6:11:39.624 PM)

Ch1 -8.367 dB

THD+N Ratio (5/15/2023 6:11:39.624 PM)

Ch1 ---- %

Frequency (5/15/2023 6:11:39.624 PM)

Ch1 ---- Hz

Sequence Report



Line Gain -10 200kTermination : Stepped Frequency Sweep -10

Generator Level: 0.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/15/2023 6:11:44 PM

RMS Level (5/15/2023 6:11:44.003 PM)

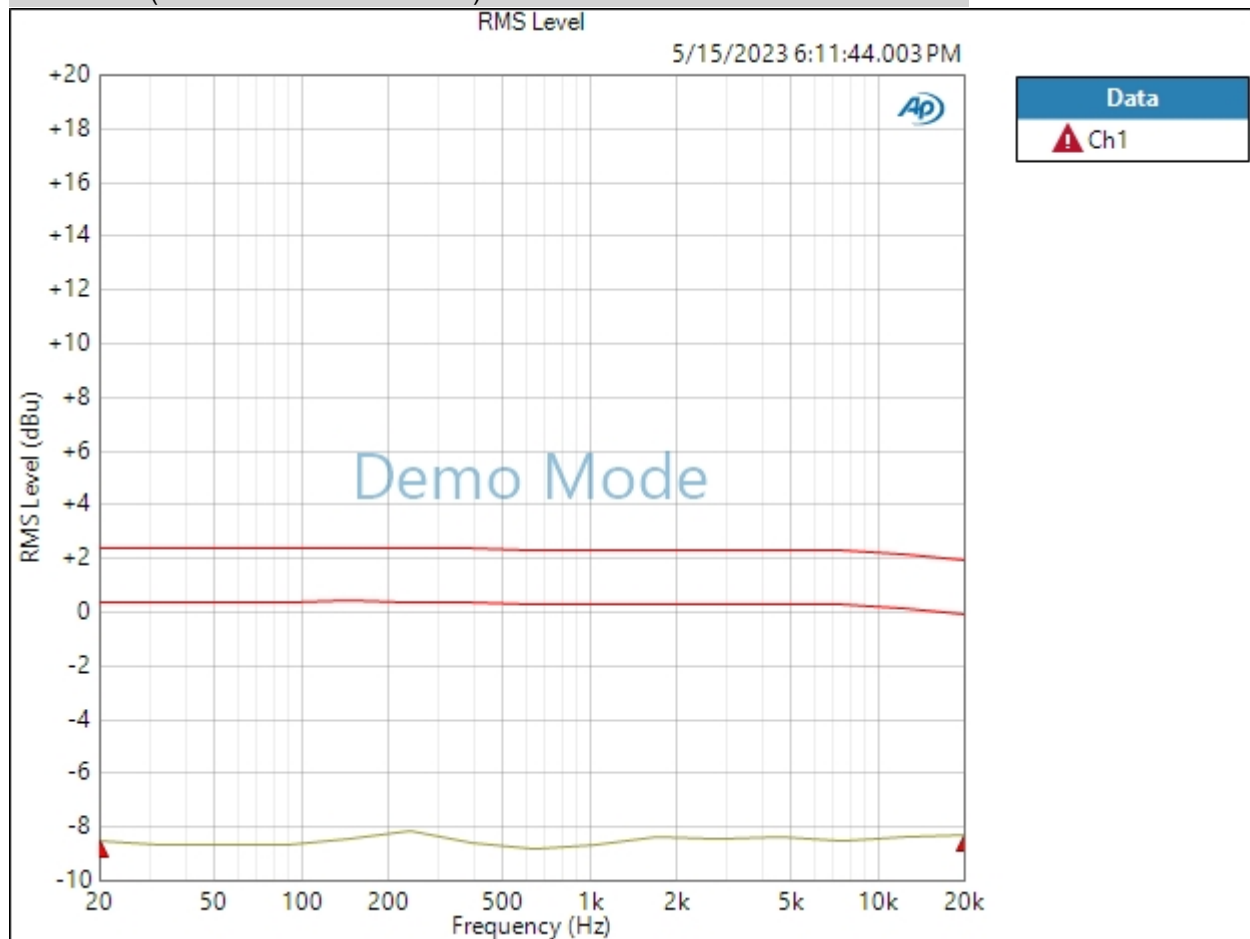


Ch1 Failed Lower Limit

Sequence Report



Result: ▲ FAILED

THD+N Ratio (5/15/2023 6:11:44.003 PM)

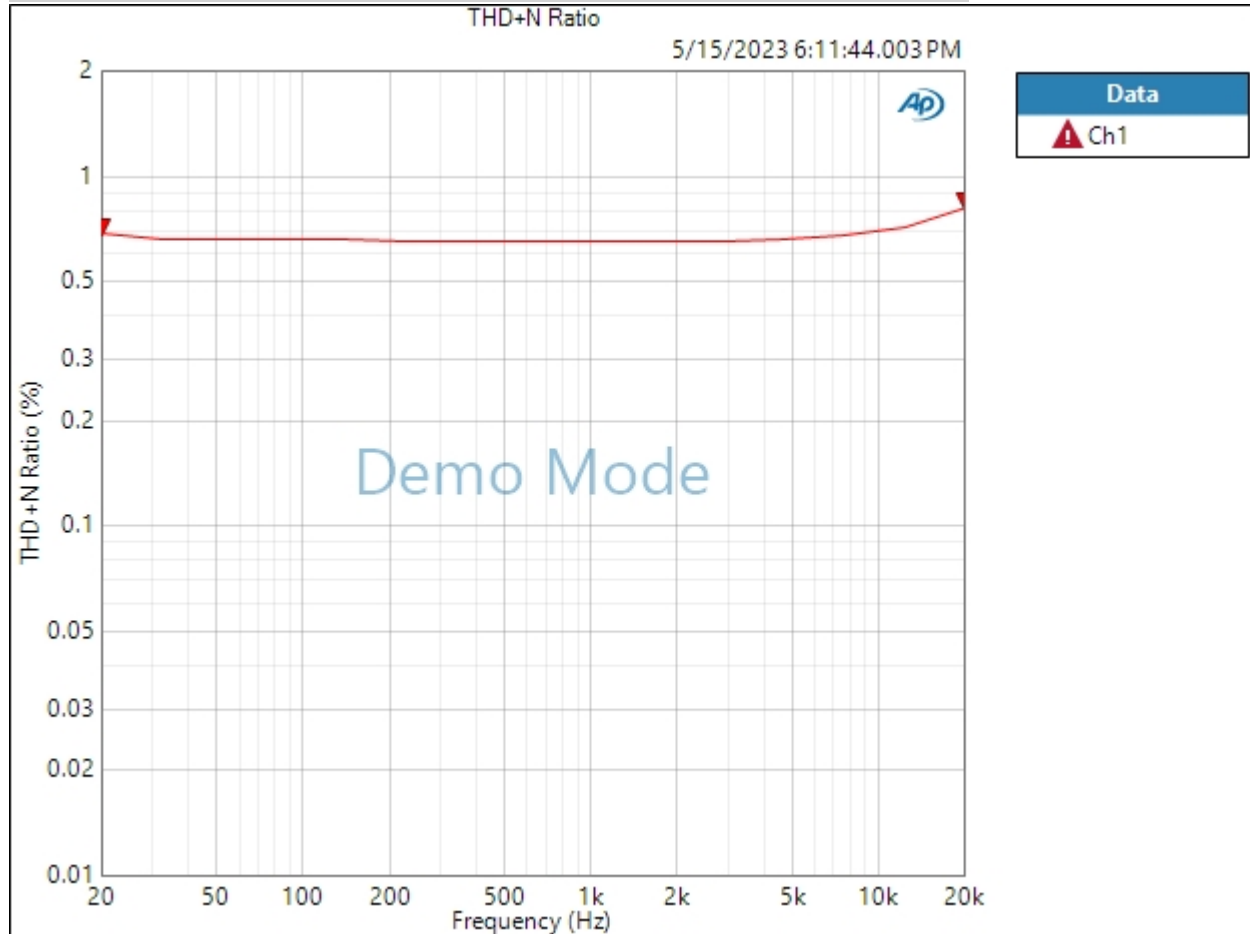

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

Sequence Report



Line Gain -10 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBra:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 6:13 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain -10 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 6:11:50.137 PM)

Ch1 296.0 mVrms

Gain (5/15/2023 6:11:50.137 PM)

Ch1 1.644 dB

THD+N Ratio (5/15/2023 6:11:50.137 PM)

Ch1 ---- %

Frequency (5/15/2023 6:11:50.137 PM)

Ch1 ---- Hz

Sequence Report



Line Gain -10 600 Termination : Level and Gain -10

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 6:11:52.849 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-11.500 dBu	-8.603 dBu	-8.500 dBu	✓

Result: ✓ PASSED

Sequence Report



Line Gain +5 200kTermination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
AG52 Generator Option: Installed
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

5/15/2023 6:13 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain +5 200kTermination : Verify Connections

Waveform: Sine

Generator Level: 0.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 6:11:58.071 PM)

Ch1 297.8 mVrms

Gain (5/15/2023 6:11:58.071 PM)

Ch1 -8.304 dB

THD+N Ratio (5/15/2023 6:11:58.071 PM)

Ch1 ---- %

Frequency (5/15/2023 6:11:58.071 PM)

Ch1 ---- Hz

Sequence Report



Line Gain +5 200kTermination : Stepped Frequency Sweep +5

Generator Level: 0.000 dBu

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15


Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Phase Ref Channel: Ch1

Measured 1 5/15/2023 6:12:02 PM

RMS Level (5/15/2023 6:12:02.795 PM)

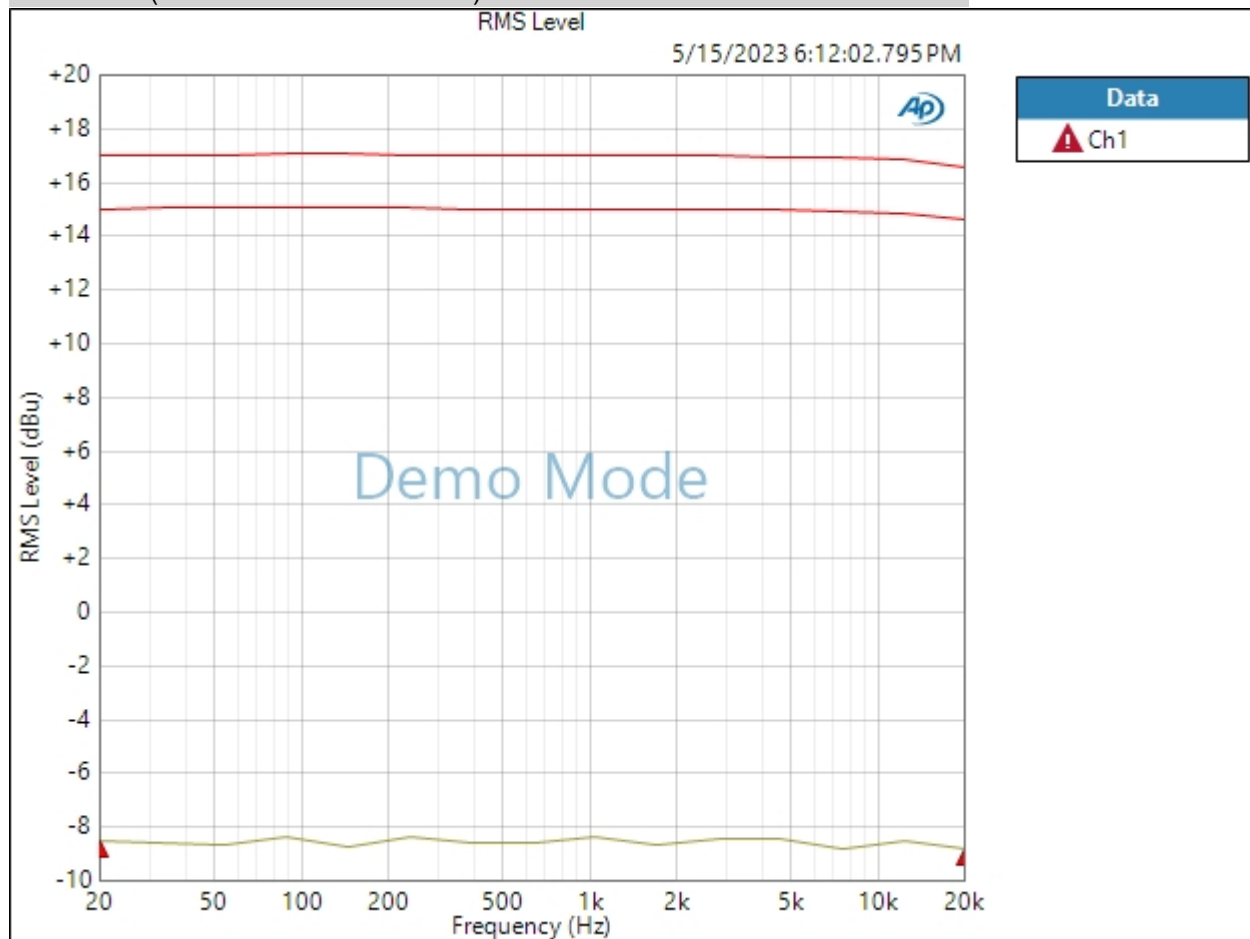

Ch1 Failed Lower Limit

5/15/2023 6:13 PM


Page 25 of 54

Sequence Report



Result: ▲ FAILED

THD+N Ratio (5/15/2023 6:12:02.795 PM)

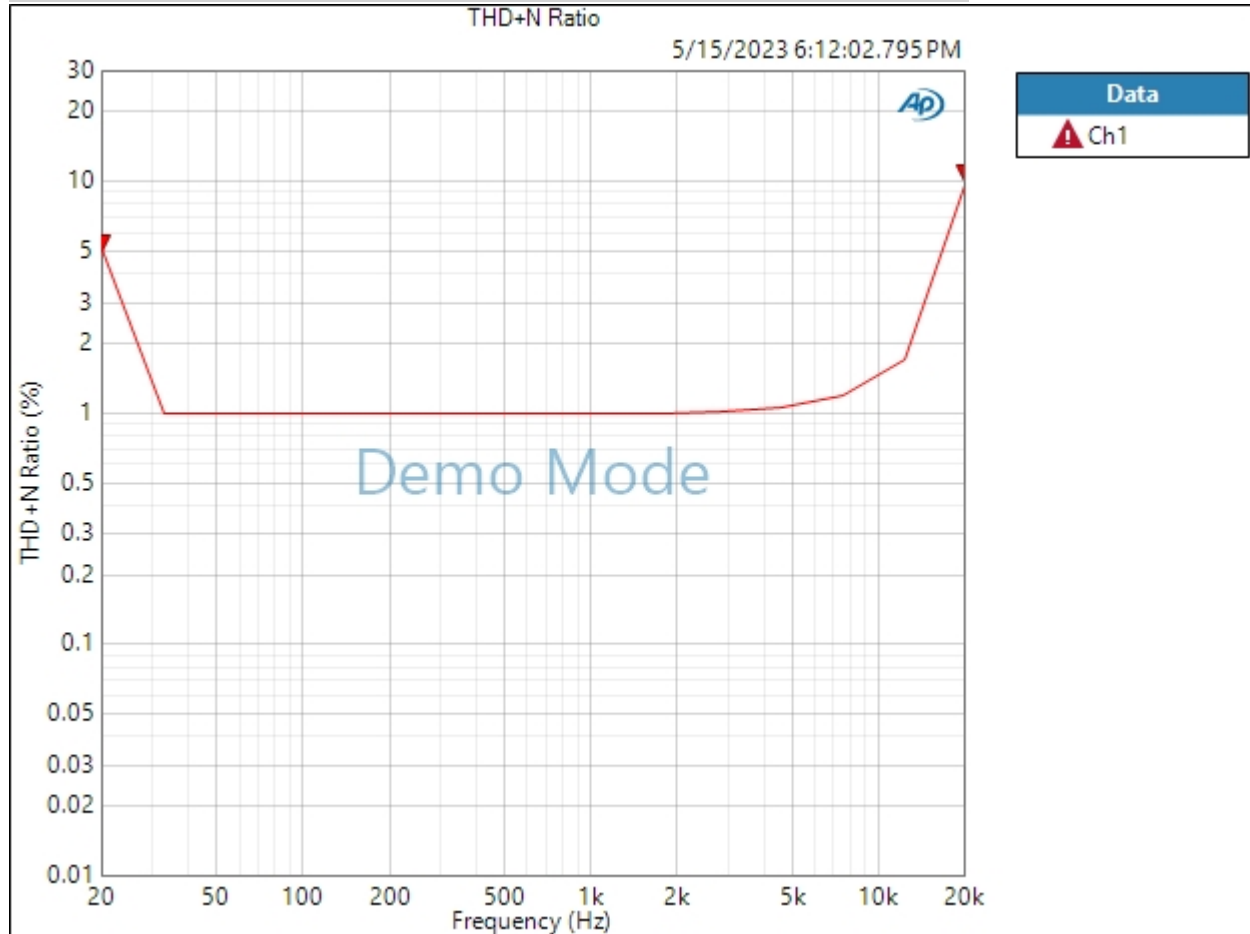

Ch1 ▲ Failed Upper Limit

Result: ▲ FAILED

Sequence Report



Line Gain +5 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBra:	1.000 Vrms
dBrB:	1.000 Vrms
dBra Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 6:13 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain +5 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 6:12:08.211 PM)

Ch1 285.9 mVrms

Gain (5/15/2023 6:12:08.211 PM)

Ch1 1.342 dB

THD+N Ratio (5/15/2023 6:12:08.211 PM)

Ch1 ---- %

Frequency (5/15/2023 6:12:08.211 PM)

Ch1 ---- Hz

Sequence Report



Line Gain +5 600 Termination : Level and Gain +5


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 6:12:11.016 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	+3.500 dBu	-8.626 dBu	+6.500 dBu	

Result:  FAILED

Sequence Report



Line Gain -5 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 6:13 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain -5 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 6:12:16.641 PM)

Ch1 284.0 mVrms

Gain (5/15/2023 6:12:16.641 PM)

Ch1 1.285 dB

THD+N Ratio (5/15/2023 6:12:16.641 PM)

Ch1 ---- %

Frequency (5/15/2023 6:12:16.641 PM)

Ch1 ---- Hz

Sequence Report



Line Gain -5 600 Termination : Level and Gain -5


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 6:12:19.462 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-6.500 dBu	-8.569 dBu	-3.500 dBu	

Result:  FAILED

Sequence Report



Line Gain 0 600 Termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
AG52 Generator Option: Installed
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 600 ohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

5/15/2023 6:13 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain 0 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 6:12:24.849 PM)

Ch1 297.9 mVrms

Gain (5/15/2023 6:12:24.849 PM)

Ch1 1.701 dB

THD+N Ratio (5/15/2023 6:12:24.849 PM)

Ch1 ---- %

Frequency (5/15/2023 6:12:24.849 PM)

Ch1 ---- Hz

Sequence Report



Line Gain 0 600 Termination : Level and Gain 0


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 6:12:27.659 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-1.500 dBu	-8.603 dBu	+1.500 dBu	

Result:  FAILED

Sequence Report



Line Gain +10 600 Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	600 ohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 6:13 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain +10 600 Termination : Verify Connections

Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 6:12:34.131 PM)

Ch1 285.3 mVrms

Gain (5/15/2023 6:12:34.131 PM)

Ch1 1.325 dB

THD+N Ratio (5/15/2023 6:12:34.131 PM)

Ch1 ---- %

Frequency (5/15/2023 6:12:34.131 PM)

Ch1 ---- Hz

Sequence Report



Line Gain +10 600 Termination : Level and Gain +10


Waveform: Sine

Generator Level: -10.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 6:12:37.088 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	+8.500 dBu	-8.548 dBu	+11.500 dBu	

Result:  FAILED

Sequence Report



Line Gain +10 200k Termination Level Hi : Signal Path Setup

Output Connector: Analog Balanced
Channels: 1
Source Impedance: 100 ohm
AG52 Generator Option: Installed
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

5/15/2023 6:13 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain +10 200k Termination Level Hi : Verify Connections

Waveform: Sine

Generator Level: -20.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 6:12:43.129 PM)

Ch1 288.9 mVrms

Gain (5/15/2023 6:12:43.129 PM)

Ch1 11.434 dB

THD+N Ratio (5/15/2023 6:12:43.129 PM)

Ch1 ---- %

Frequency (5/15/2023 6:12:43.129 PM)

Ch1 ---- Hz


Sequence Report



Line Gain +10 200k Termination Level Hi : Noise Recorder (RMS) CW

Waveform: None
Low-pass Filter: 20 kHz
Weighting Filter: Signal Path
High-pass Filter: 20 Hz
Sweep Time: 0.00:00:03.000
Reading Rate: 10/sec
Input Bandwidth: Use Signal Path
Record Acquisition: False
Measured 1 5/15/2023 6:12:48 PM

RMS Level (5/15/2023 6:12:48.443 PM)

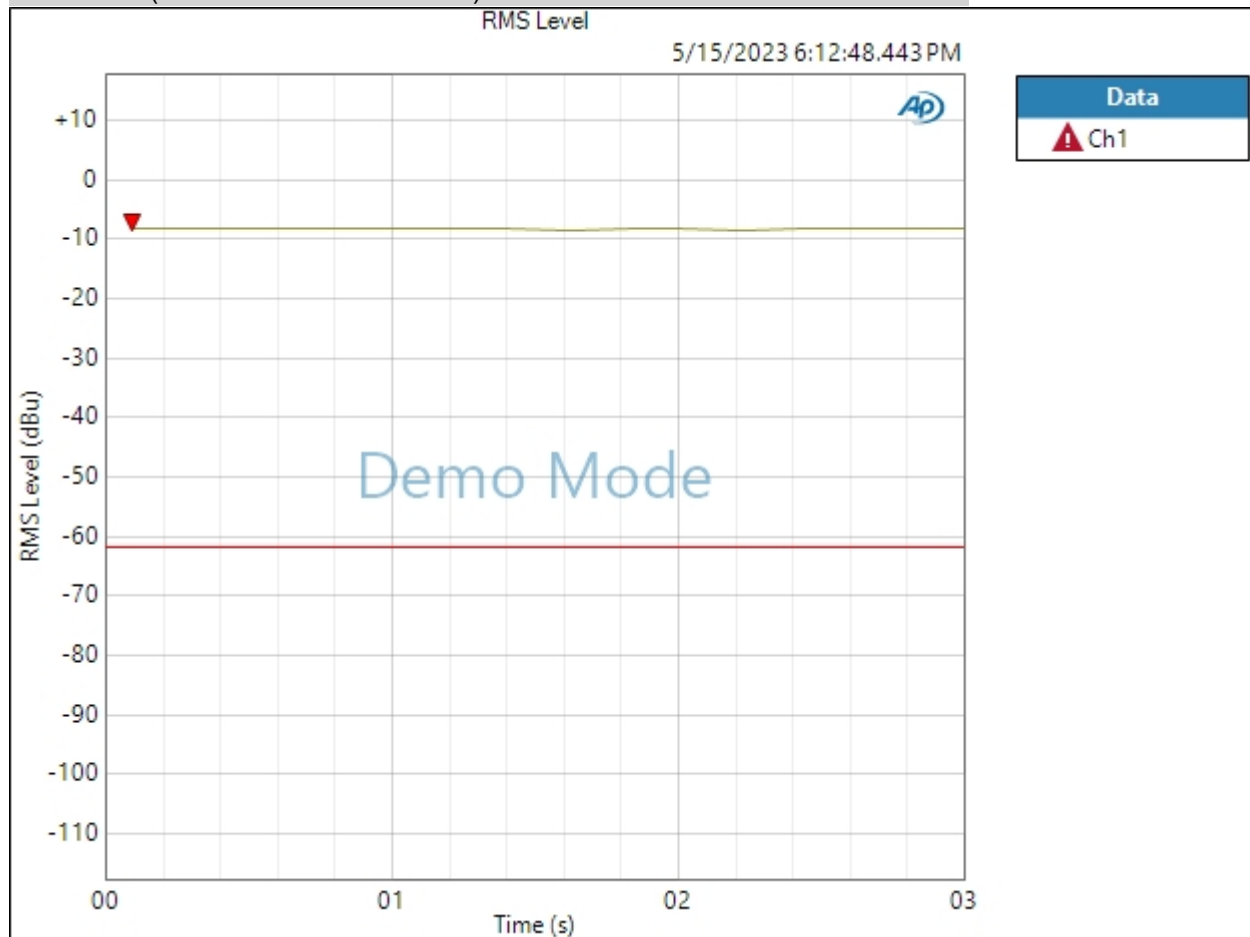

Ch1 Failed Upper Limit

Result: FAILED

5/15/2023 6:13 PM

Page 41 of 54

Sequence Report



Line Gain +10 200k Termination Level Low : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	1
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 6:13 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Line Gain +10 200k Termination Level Low : Verify Connections

Waveform: Sine

Generator Level: -20.000 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 6:12:53.785 PM)

Ch1 286.0 mVrms

Gain (5/15/2023 6:12:53.785 PM)

Ch1 11.345 dB

THD+N Ratio (5/15/2023 6:12:53.785 PM)

Ch1 ---- %

Frequency (5/15/2023 6:12:53.785 PM)

Ch1 ---- Hz


Sequence Report



Line Gain +10 200k Termination Level Low : Noise Recorder (RMS) CCW

Waveform: None
Low-pass Filter: 20 kHz
Weighting Filter: Signal Path
High-pass Filter: 20 Hz
Sweep Time: 0.00:00:03.000
Reading Rate: 10/sec
Input Bandwidth: Use Signal Path
Record Acquisition: False
Measured 1 5/15/2023 6:12:59 PM

RMS Level (5/15/2023 6:12:59.831 PM)

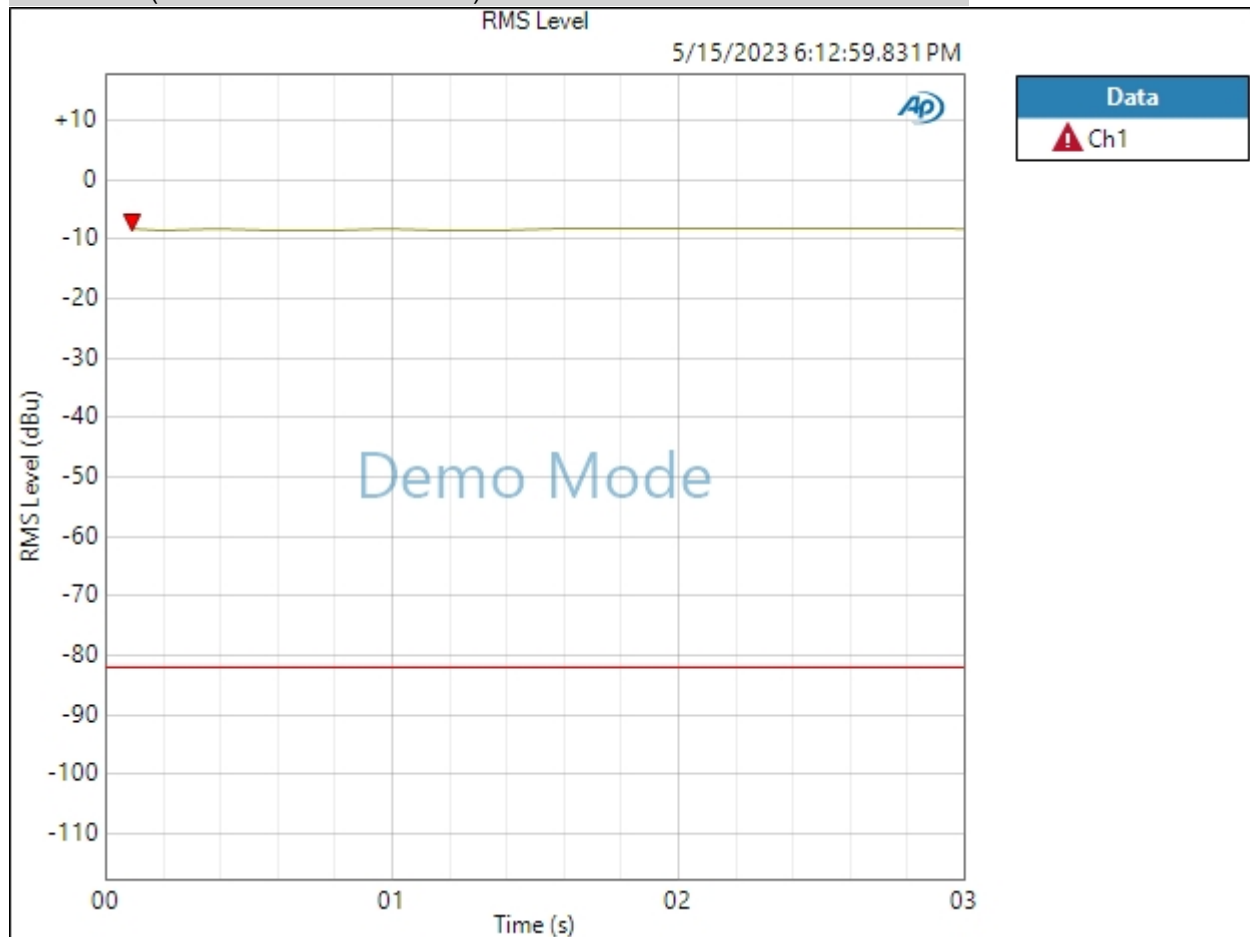

Ch1 Failed Upper Limit

Result: FAILED

5/15/2023 6:13 PM

Page 45 of 54

Sequence Report



Hi Z Gain -10 2.2M 200k Termination : Signal Path Setup

Output Connector:	Analog Balanced
Channels:	2
Source Impedance:	100 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	1
Channel:	Ch1
Termination:	200 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00

5/15/2023 6:13 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Hi Z Gain -10 2.2M 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 6:13:05.046 PM)

Ch1 282.1 mVrms

Gain (5/15/2023 6:13:05.046 PM)

Ch1 13.528 dB

THD+N Ratio (5/15/2023 6:13:05.046 PM)

Ch1 ---- %

Frequency (5/15/2023 6:13:05.046 PM)

Ch1 ---- Hz

Sequence Report



Hi Z Gain -10 2.2M 200k Termination : Level and Gain 2.2M


Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 6:13:08.415 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-2.000 dBu	-8.593 dBu	+2.000 dBu	

Result:  FAILED

Sequence Report



Hi Z Gain -10 47k 200k Termination : Signal Path Setup

Output Connector: Analog Balanced
Channels: 2
Source Impedance: 100 ohm
AG52 Generator Option: Installed
Output EQ: None
Input Connector: Analog Balanced
Channels: 1
Channel: Ch1
Termination: 200 kohm
Input Bandwidth: AC (<10 Hz) - 90k (192 kHz SR)
Device Delay: 0.000 s
Input EQ: None

• References

dBr G: 100.0 mVrms
dBm (Output Power): 600.0 ohm
W(watts) (Output Power): 8.000 ohm
Shared Frequency Reference: 1.00000 kHz
dBrA: 1.000 Vrms
dBrB: 1.000 Vrms
dBrA Offset: 0.000 dB
dBrB Offset: 0.000 dB
dBSPL1: 10.00 mVrms
dBSPL2: 10.00 mVrms
dBSPL1 Calibrator Level: 94.000 dB SPL
dBSPL2 Calibrator Level: 94.000 dB SPL
dBm (Input Power): 600.0 ohm
W(watts) (Input Power): 8.000 ohm

• DCX

DC Output 1: 0.000 V
DC Output 1: Off
DC Output 2: 0.000 V
DC Output 2: Off
Port A (hex): 00
Port B (hex): 00
Port C (hex): 00

5/15/2023 6:13 PM

Sequence Report



Port D (hex): 00

- Clocks

Output Rate: Track Output SR

Sync Out Level: 3.300 V

Sync Out Polarity: Normal

Timebase Reference: Internal

Jitter: Disabled

- Triggers

Source: Off

Input Logic Level: 3.300 V

Edge: Rising

Hi Z Gain -10 47k 200k Termination : Verify Connections

Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 6:13:13.932 PM)

Ch1 293.6 mVrms

Gain (5/15/2023 6:13:13.932 PM)

Ch1 13.873 dB

THD+N Ratio (5/15/2023 6:13:13.932 PM)

Ch1 ---- %

Frequency (5/15/2023 6:13:13.932 PM)

Ch1 ---- Hz

Sequence Report



Hi Z Gain -10 47k 200k Termination : Level and Gain 47K


Waveform: Sine

Generator Level: -22.300 dBu

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (5/15/2023 6:13:16.747 PM)

Channel	Lower Limit	Value	Upper Limit	
Ch1	-8.000 dBu	-8.604 dBu	-4.000 dBu	

Result:  FAILED

Sequence Report



Dummy Signal Path For Report : Signal Path Setup

Output Connector:	Analog Unbalanced
Channels:	2
Source Impedance:	50 ohm
AG52 Generator Option:	Installed
Output EQ:	None
Input Connector:	Analog Unbalanced
Channels:	2
Termination:	100 kohm
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	100.0 mVrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DC Output 1:	0.000 V
DC Output 1:	Off
DC Output 2:	0.000 V
DC Output 2:	Off
Port A (hex):	00
Port B (hex):	00
Port C (hex):	00
Port D (hex):	00

5/15/2023 6:13 PM

Sequence Report



- Clocks

Output Rate:	Track Output SR
Sync Out Level:	3.300 V
Sync Out Polarity:	Normal
Timebase Reference:	Internal
Jitter:	Disabled

- Triggers

Source:	Off
Input Logic Level:	3.300 V
Edge:	Rising

Dummy Signal Path For Report : Verify Connections

Waveform:	Sine
Generator Level:	100.0 mVrms
DC Offset:	0.000 V
Frequency:	1.00000 kHz

RMS Level (5/15/2023 6:13:20.371 PM)

Ch1	298.6 mVrms
Ch2	289.1 mVrms