16-Lead Plastic Shrink Small Outline package (2DW) - 4.4 mm Body [TSSOP] With 3.35x2.95 mm Exposed Pad

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

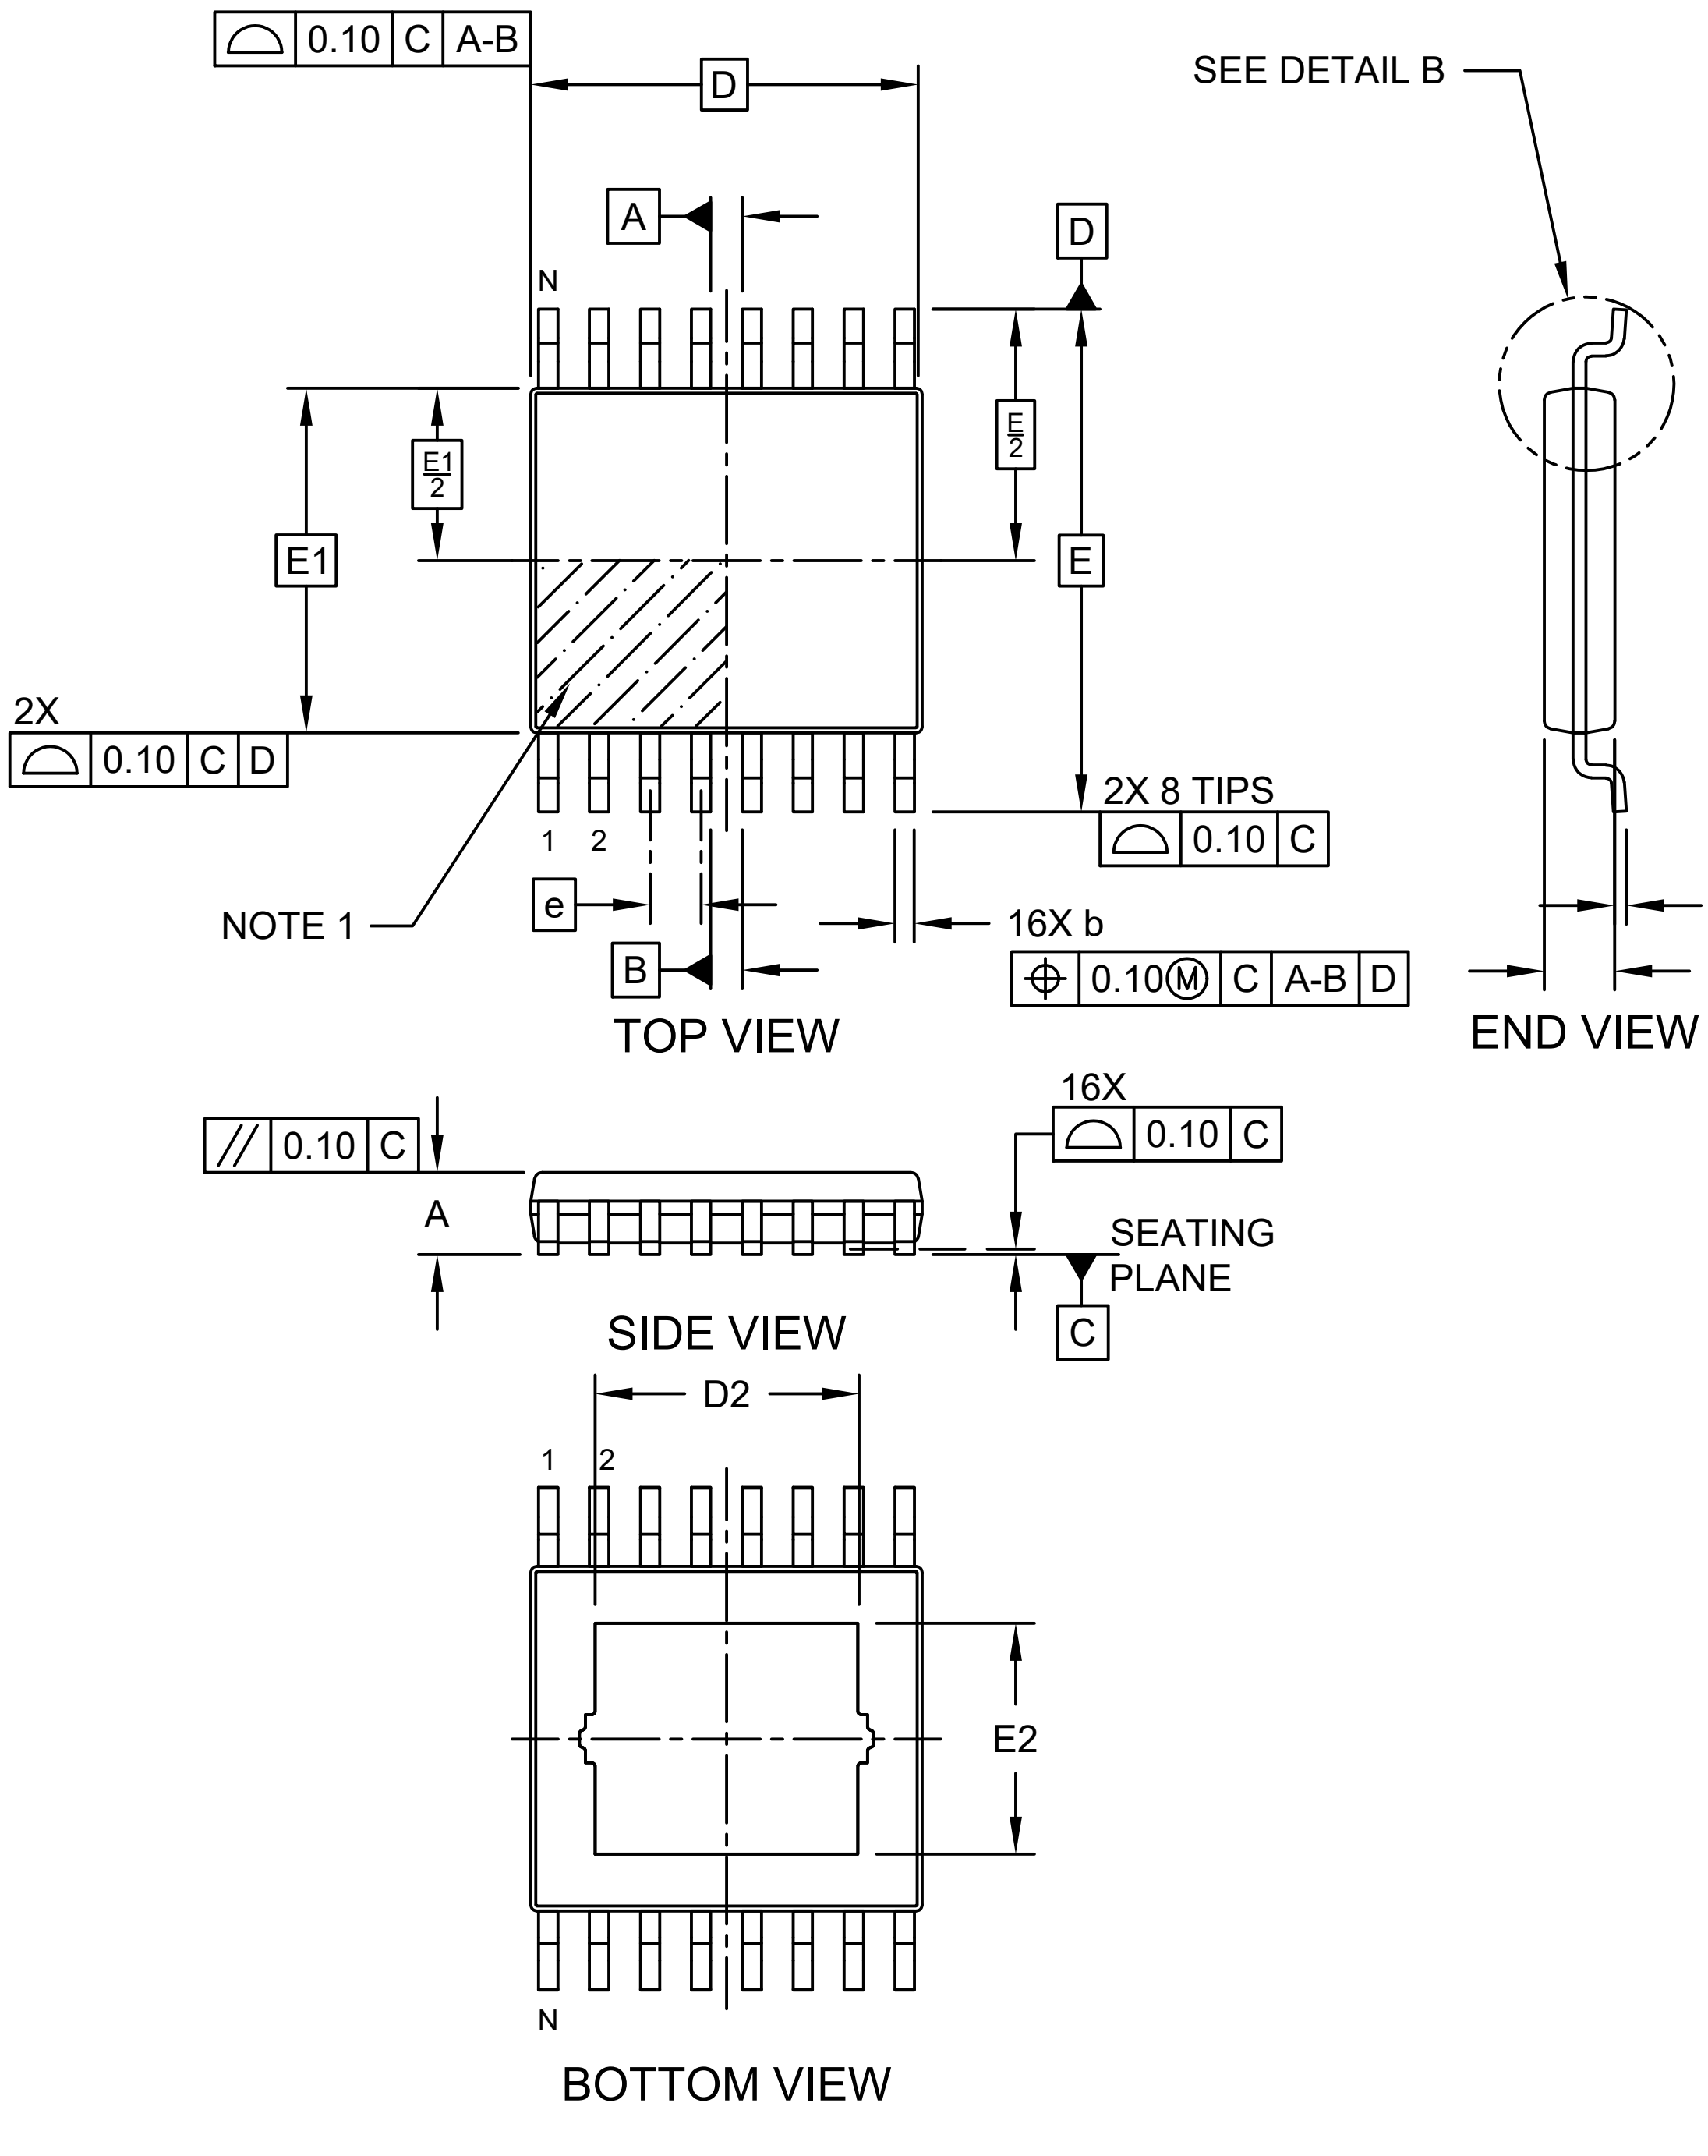

16-Lead Plastic Shrink Small Outline package (2DW) - 4.4 mm Body [TSSOP] With 3.35x2.95 mm Exposed Pad

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

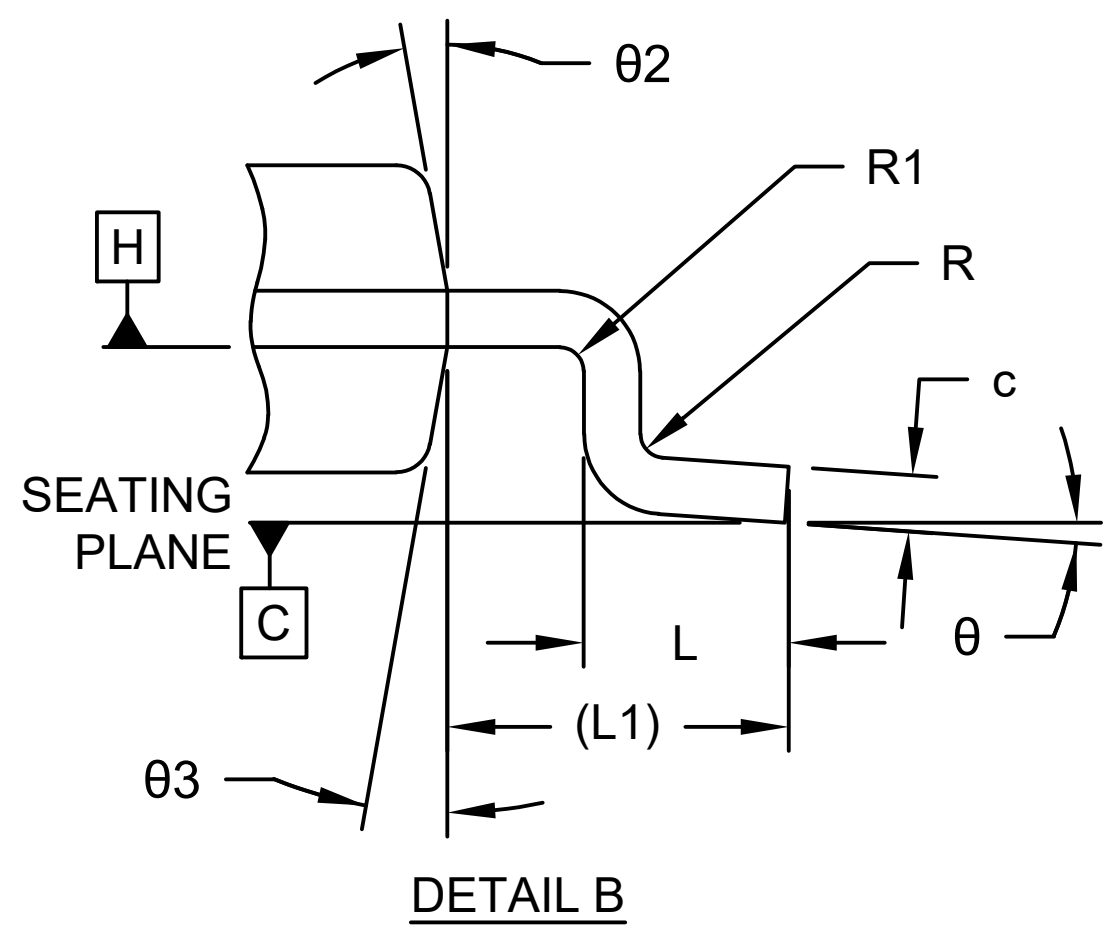

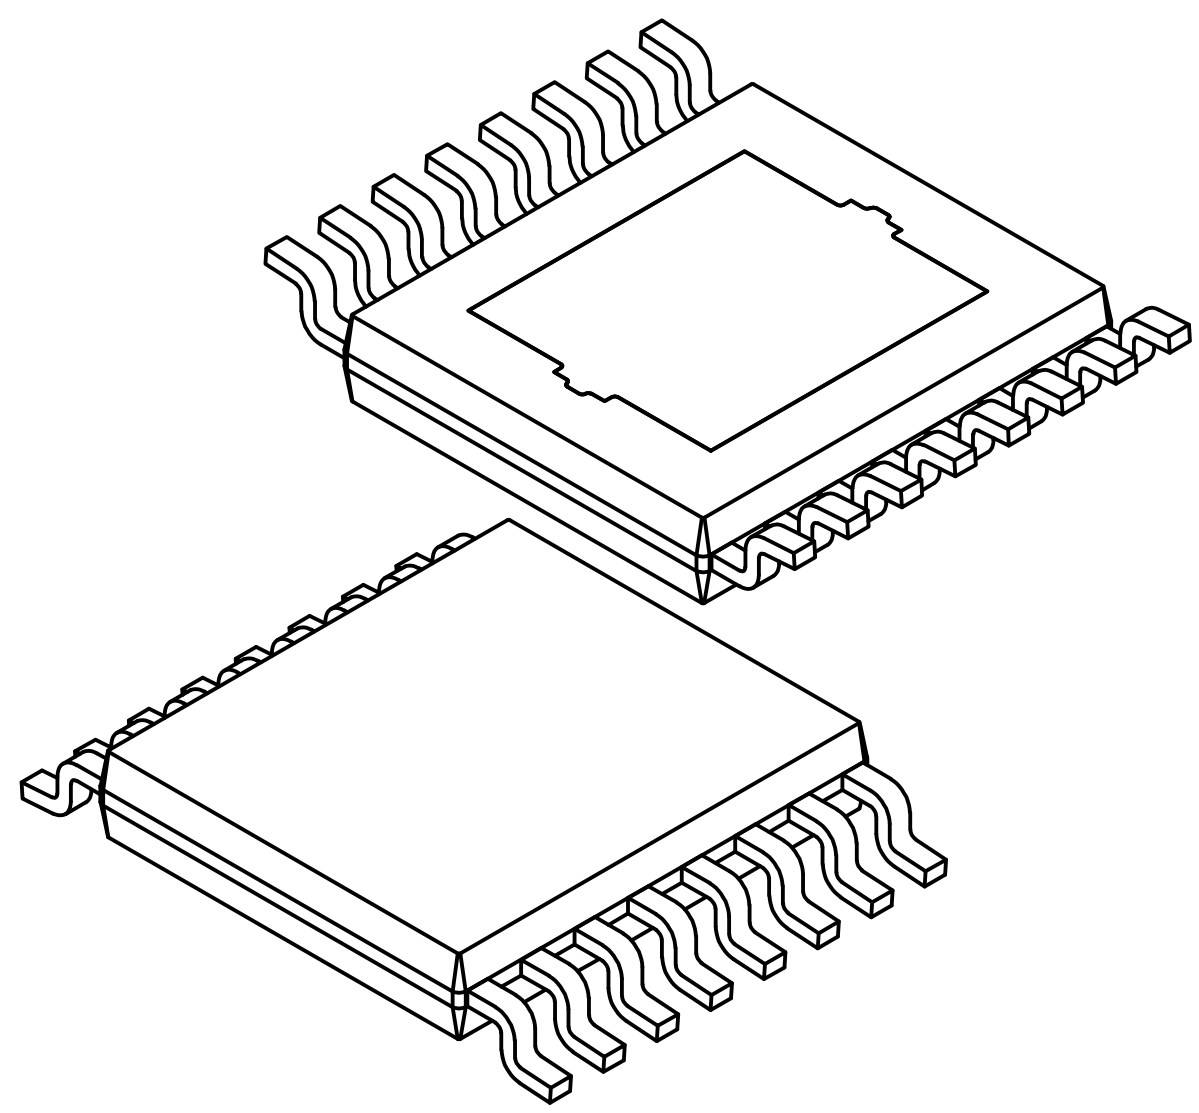

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N		16	
Pitch	e		0.65 BSC	
Overall Height	A	–	–	1.10
Standoff	A1	0.05	–	0.15
Molded Package Thickness	A2	0.85	–	0.95
Overall Length	D		5.00 BSC	
Overall Width	E		6.40 BSC	
Molded Package Width	E1		4.40 BSC	
Overall Width	D2	3.10	3.28	3.45
Molded Package Width	E2	2.69	2.87	3.05
Terminal Width	b	0.195	–	0.30
Terminal Thickness	c	0.13	–	0.20
Terminal Length	L	0.45	–	0.75
Footprint	L1		1.00 REF	
Lead Bend Radius	R1	0.07	–	–
Lead Bend Radius	R2	0.07	–	–
Foot Angle	θ	0°	–	8°
Mold Draft Angle	θ2	5°	–	15°
Mold Draft Angle	θ3	5°	–	15°

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-539 Rev A Sheet 2 of 2

16-Lead Plastic Shrink Small Outline package (2DW) - 4.4 mm Body [TSSOP] With 3.35x2.95 mm Exposed Pad

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

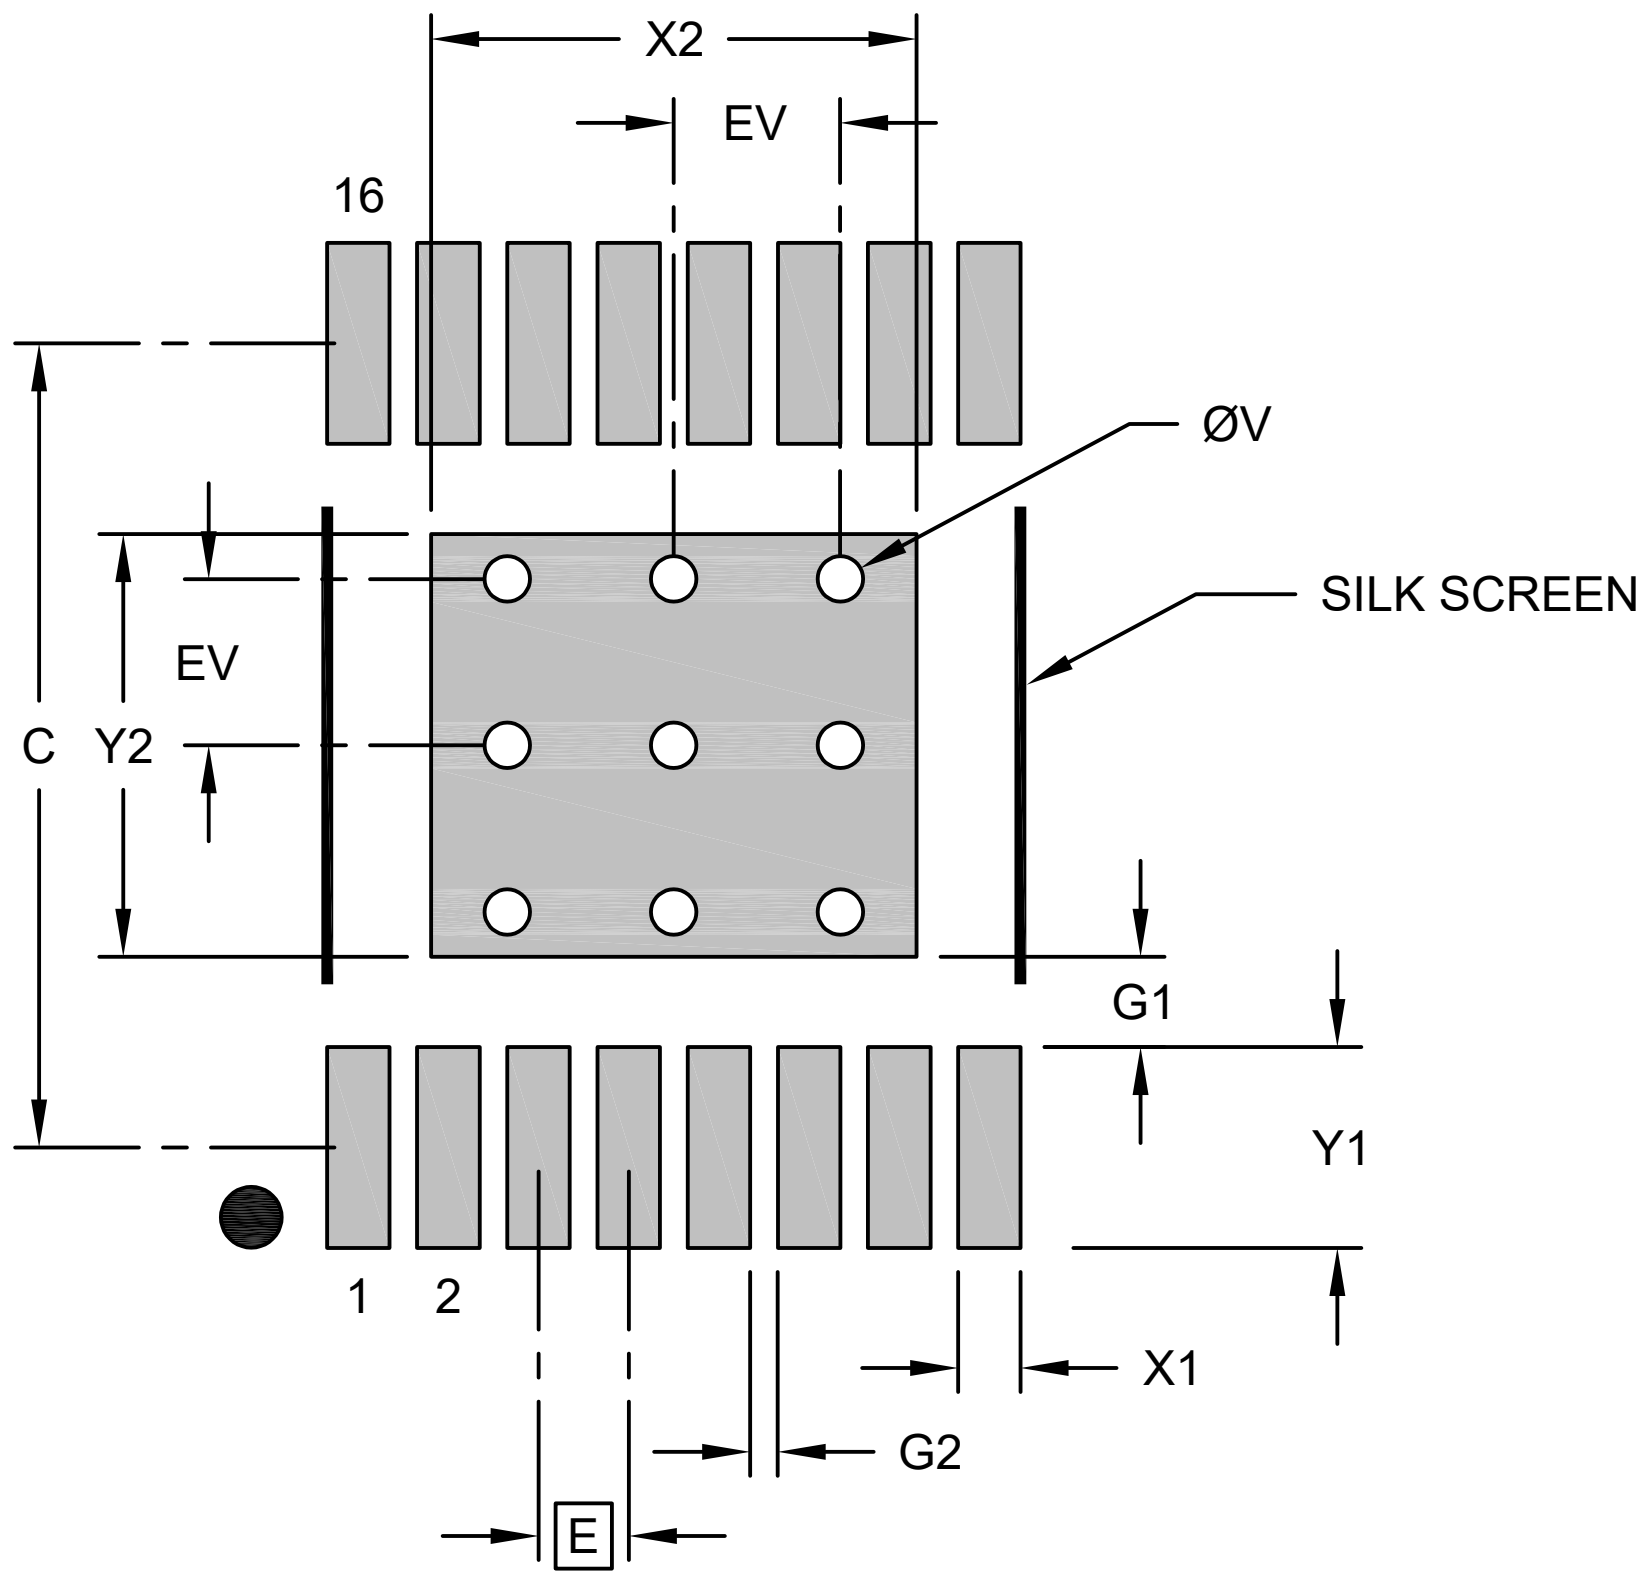

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E		0.65 BSC	
Center Pad Width	X2			3.50
Center Pad Length	Y2			3.05
Contact Pad Spacing	C		5.80	
Contact Pad Width (X16)	X1			0.45
Contact Pad Length (X16)	Y1			1.45
Contact Pad to Center Pad (X16)	G1	0.65		
Contact Pad to Contact Pad (X14)	G2	0.20		
Thermal Via Diameter	V		0.33	
Thermal Via Pitch	EV		0.20	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2539 Rev A