6-Lead Ultra Thin Plastic Dual Flat, No Lead (HHA) - 1.2x1.2x0.6 mm Body [UDFN] With 0.94x0.30 mm Exposed Pad

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

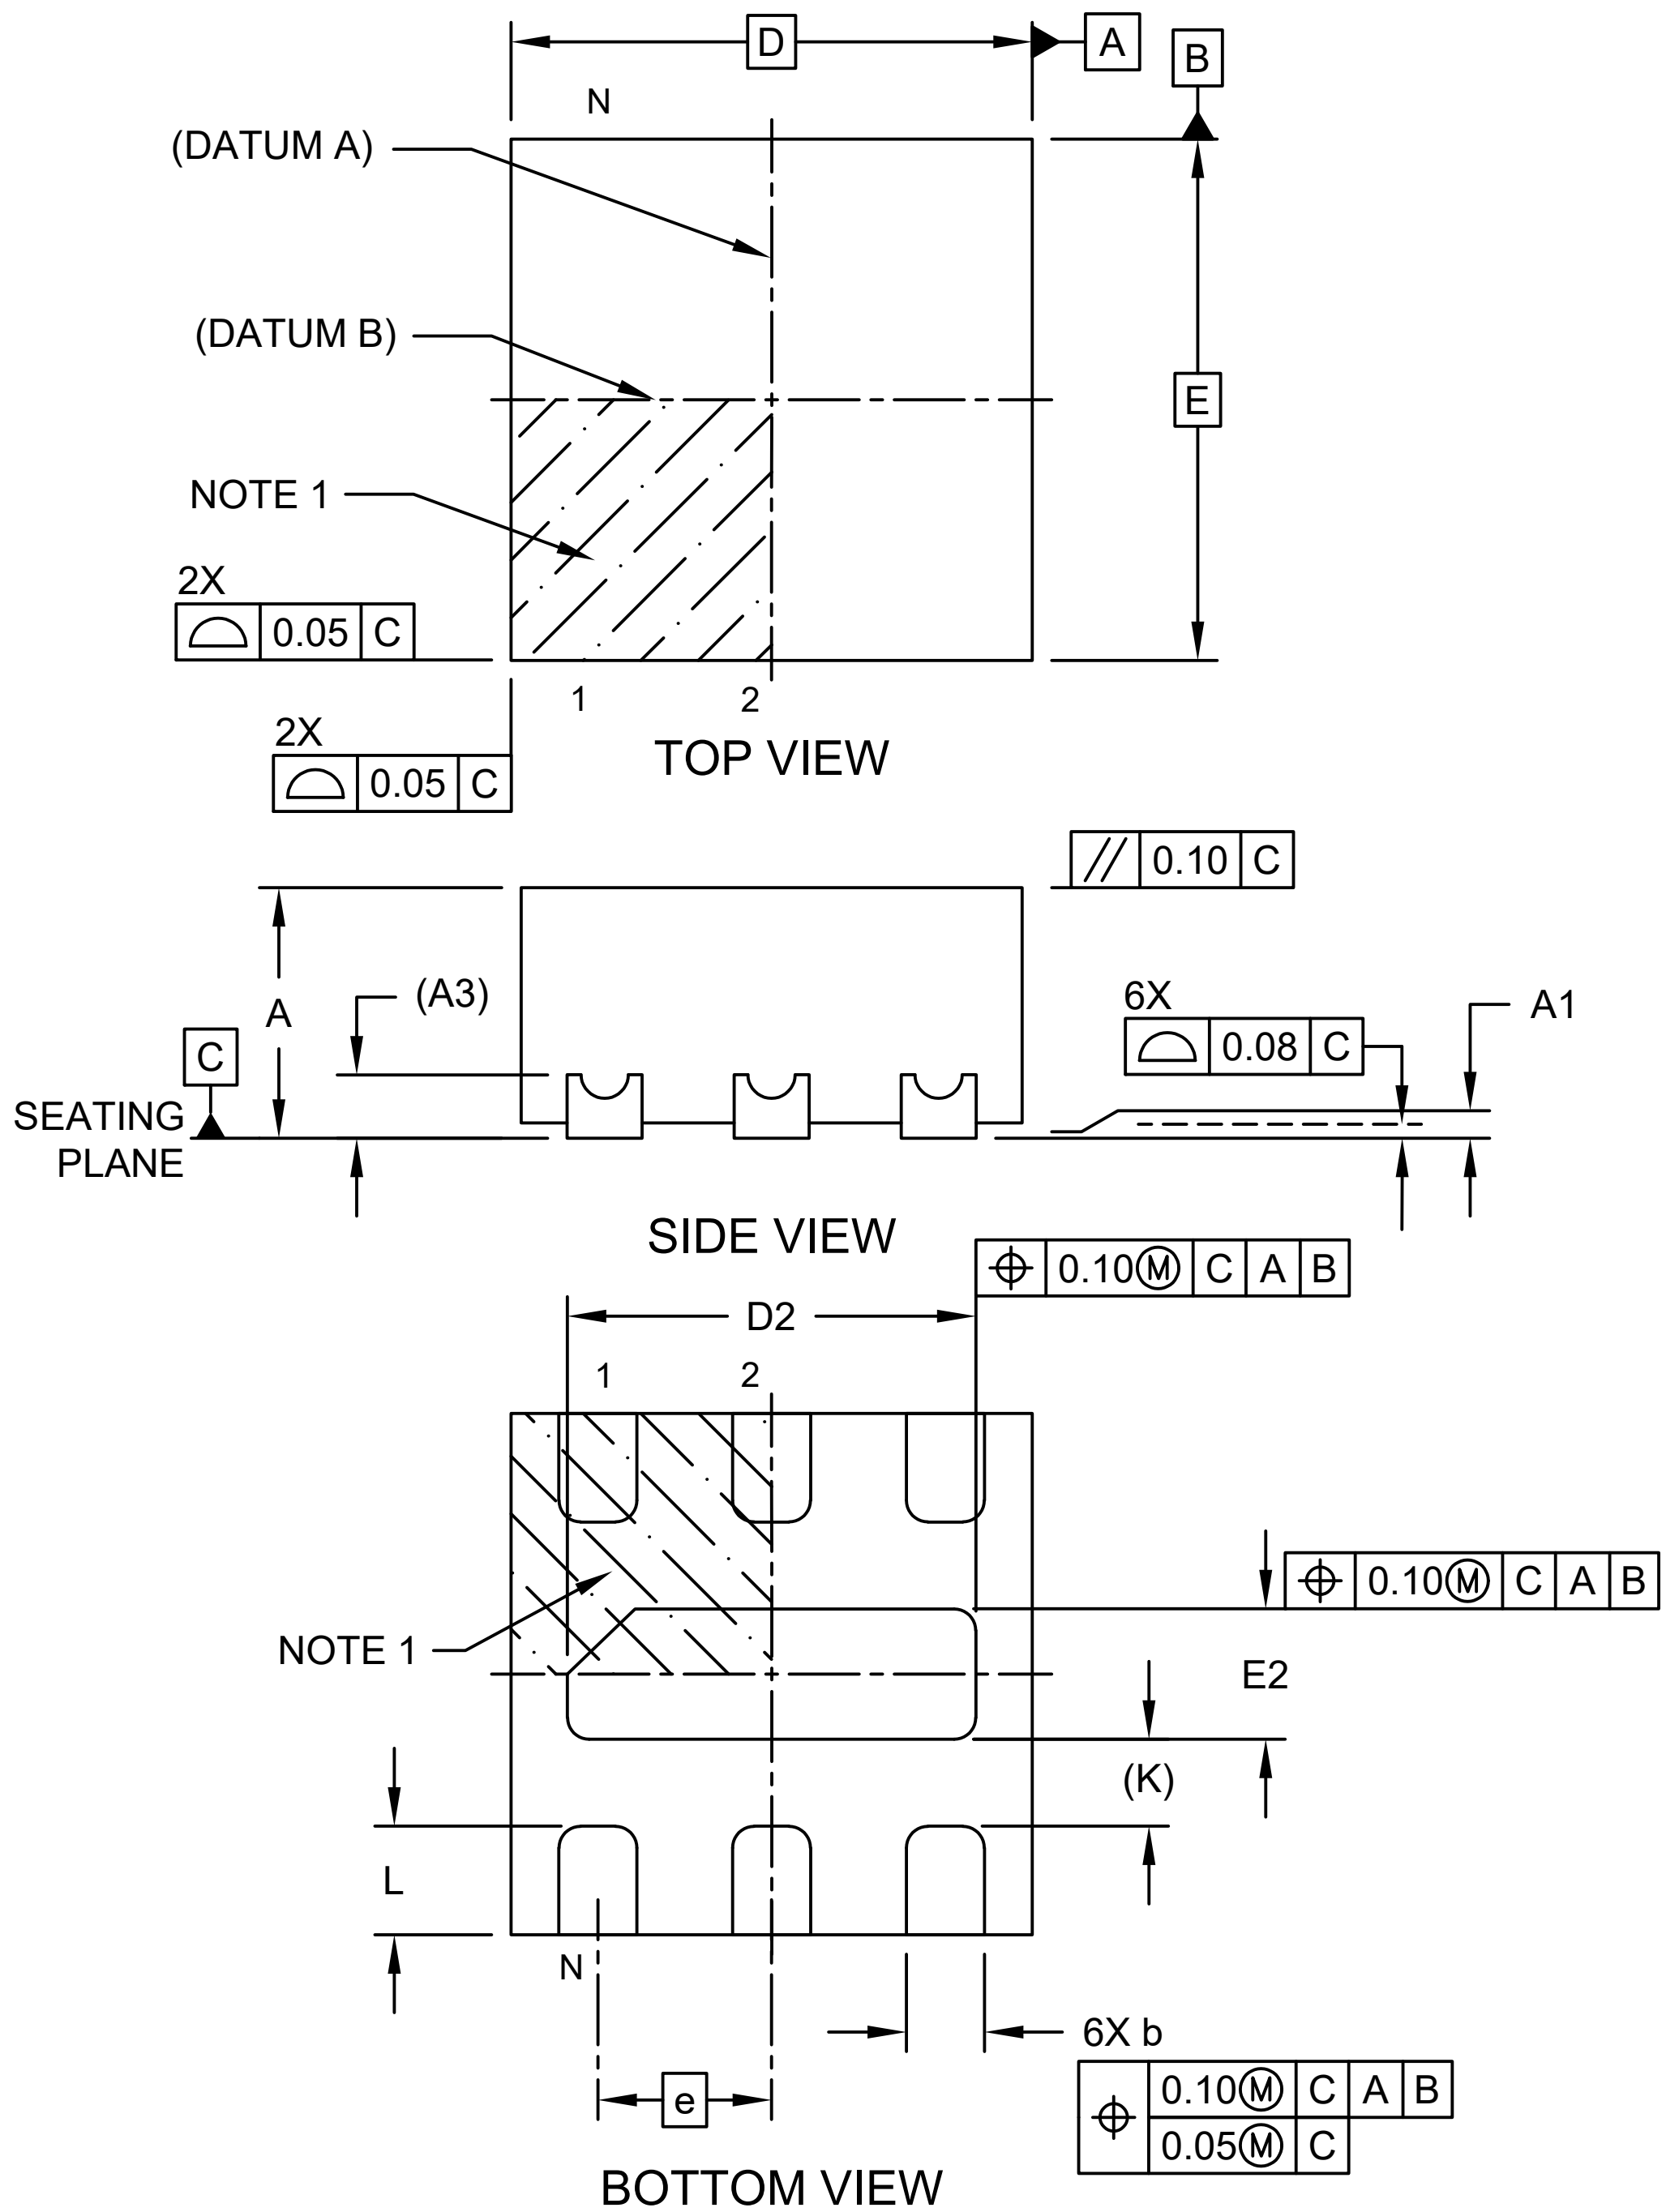

Microchip Technology Drawing C04-1151 Rev A Sheet 1 of 2

6-Lead Ultra Thin Plastic Dual Flat, No Lead (HHA) - 1.2x1.2x0.6 mm Body [UDFN] With 0.94x0.30 mm Exposed Pad

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

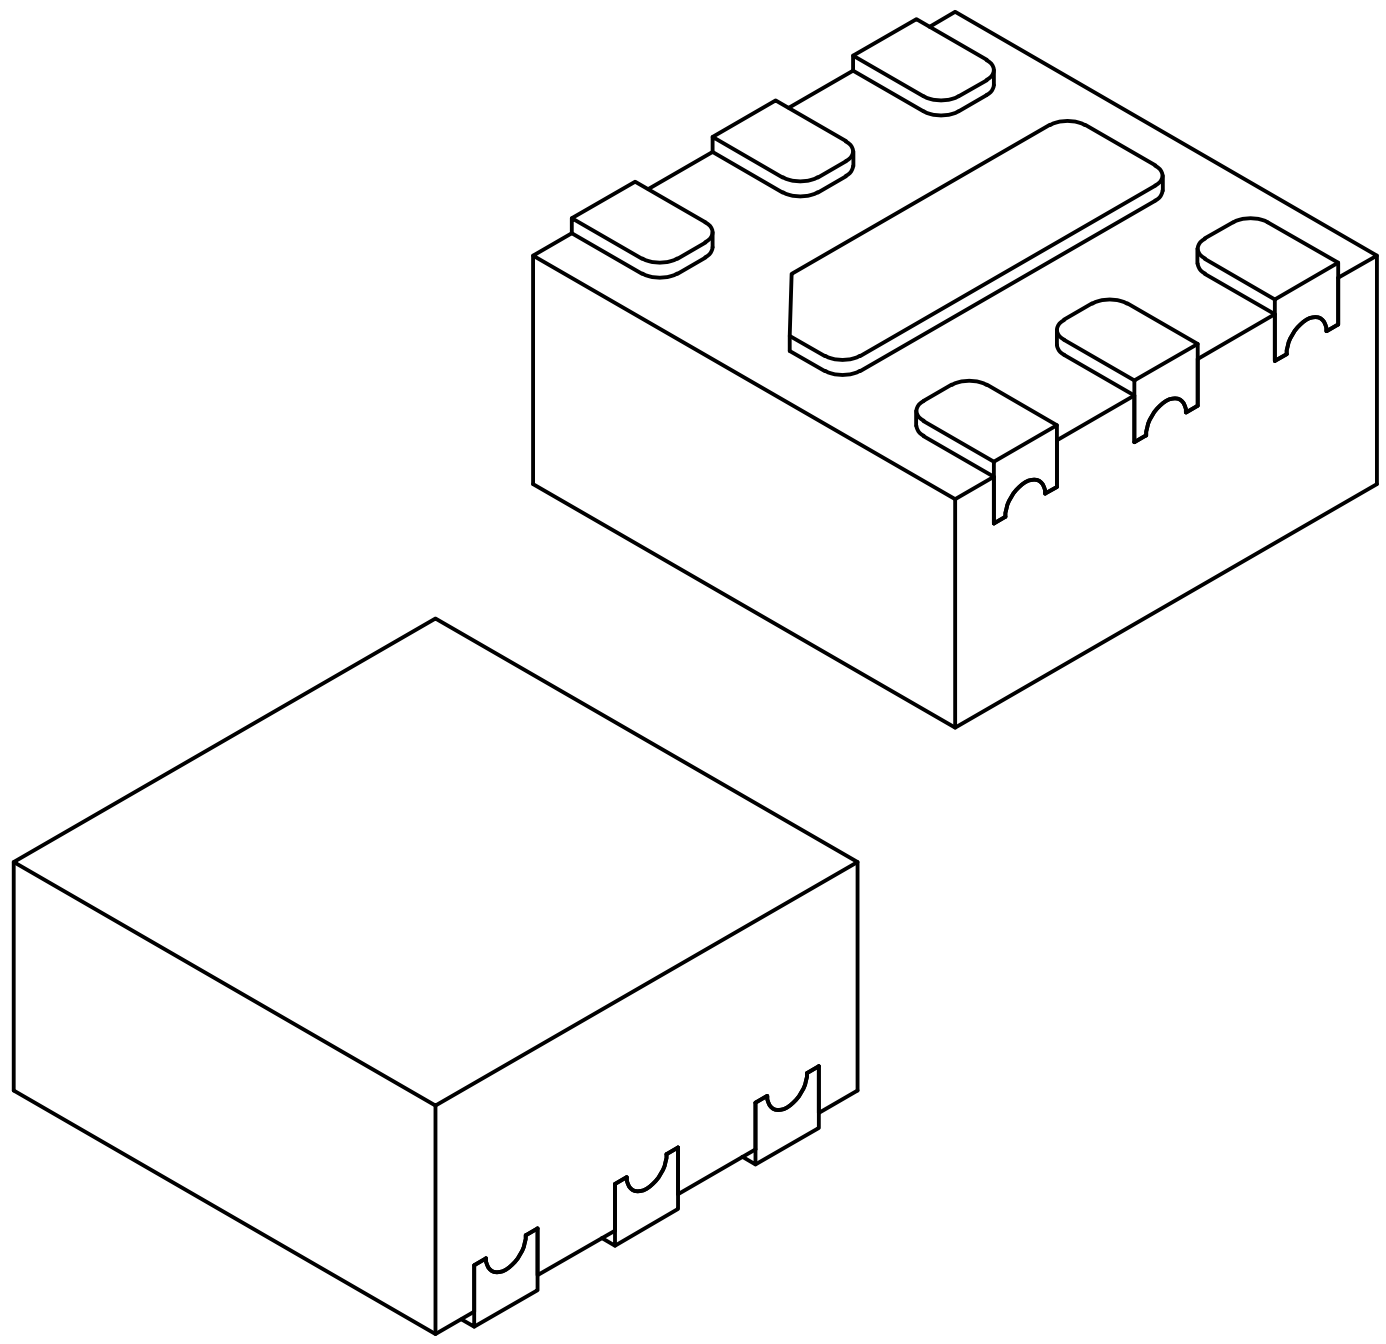

	Units	MILLIMETERS		
	Dimension Limits	MIN	NOM	MAX
Number of Terminals	N		6	
Pitch	e		0.40 BSC	
Overall Height	A	0.45	0.55	0.60
Standoff	A1	0.00	0.018	0.037
Terminal Thickness	A3		0.15 REF	
Overall Length	D		1.20 BSC	
Exposed Pad Length	D2	0.89	0.94	0.99
Overall Width	E		1.20 BSC	
Exposed Pad Width	E2	0.25	0.30	0.35
Terminal Width	b	0.13	0.18	0.23
Terminal Length	L	0.20	0.25	0.30
Terminal-to-Exposed-Pad	K		0.20 REF	

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M

   BSC: Basic Dimension. Theoretically exact value shown without tolerances.

   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-1151 Rev A Sheet 2 of 2

6-Lead Ultra Thin Plastic Dual Flat, No Lead (HHA) - 1.2x1.2x0.6 mm Body [UDFN] With 0.94x0.30 mm Exposed Pad

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

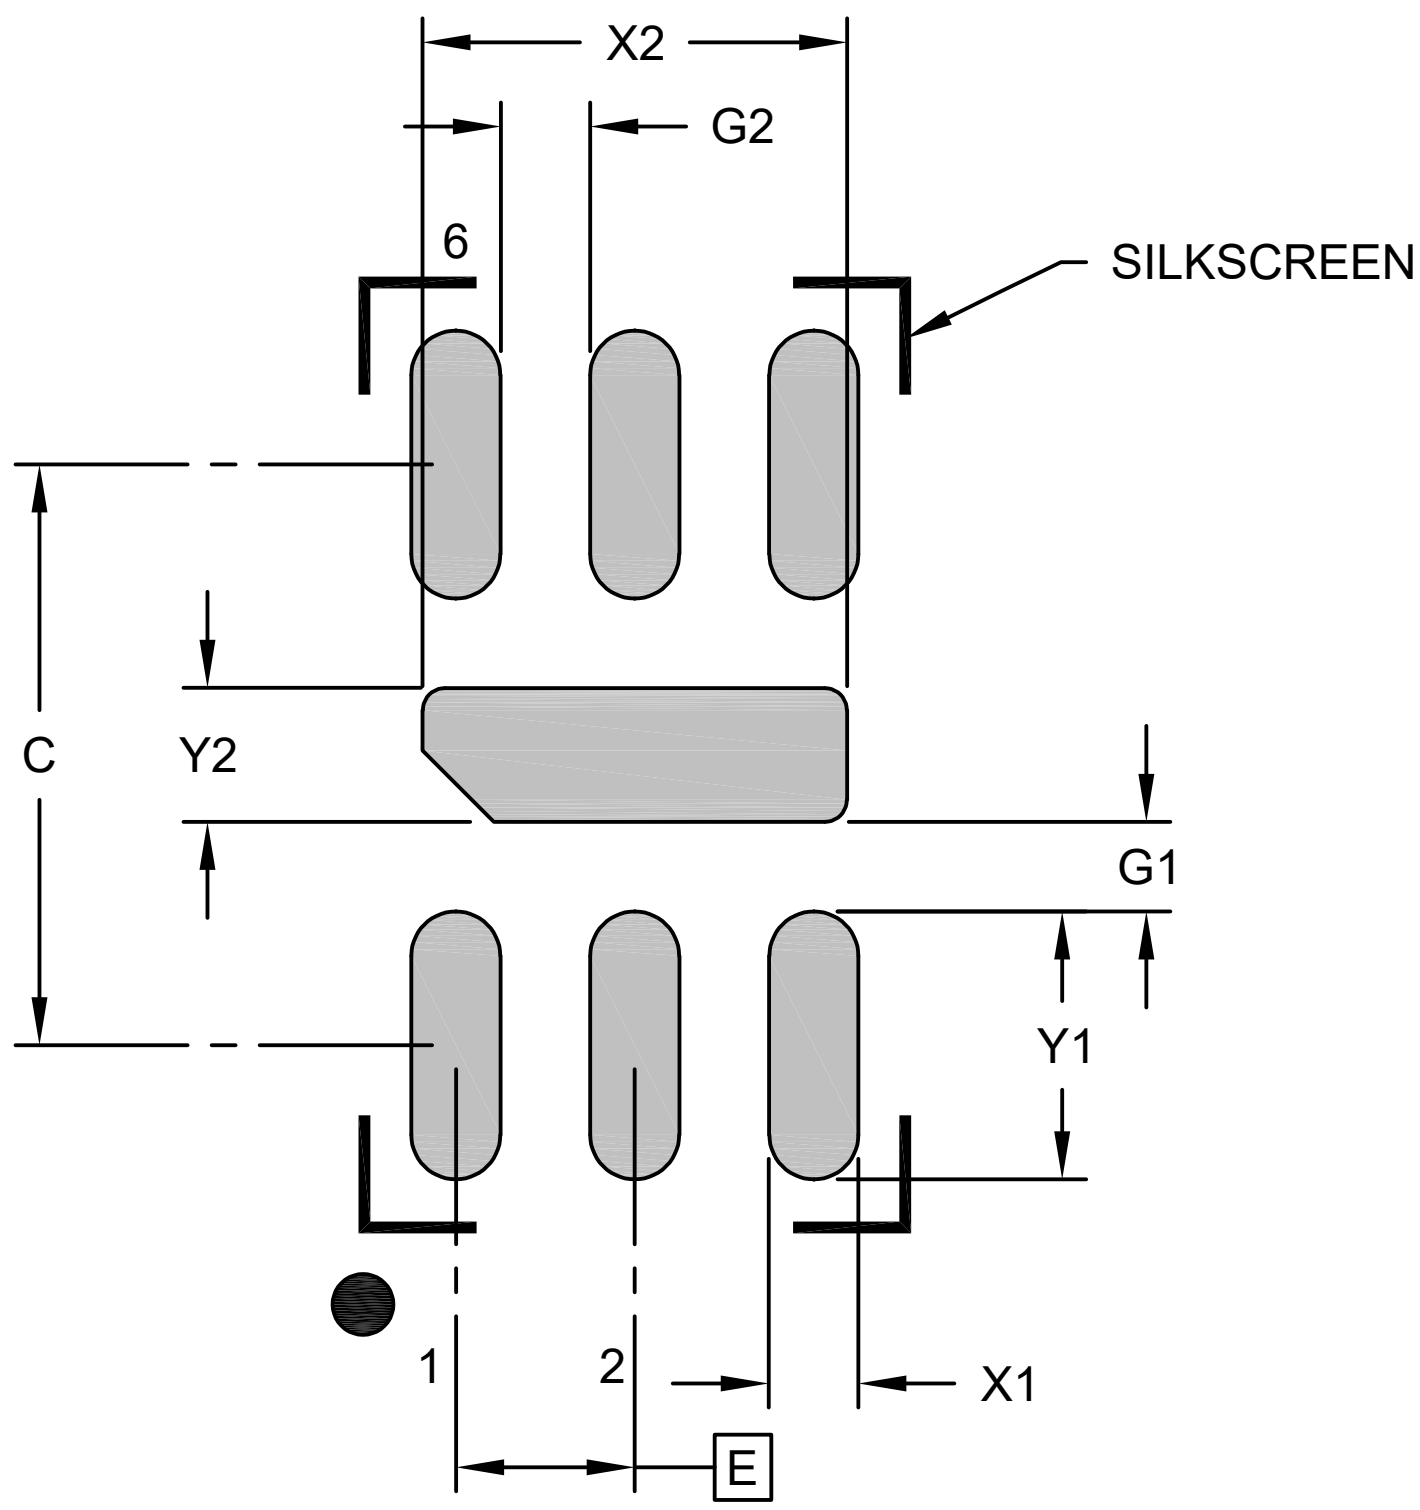

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E		0.40 BSC	
Center Pad Width	X2			0.95
Center Pad Length	Y2			0.30
Contact Pad Spacing	C		1.30	
Contact Pad Width (X6)	X1			0.20
Contact Pad Length (X6)	Y1			0.60
Contact Pad to Center Pad (X6)	G1	0.20		
Contact Pad to Contact Pad (X4)	G2	0.20		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

   BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-3151 Rev A