24-Lead Thin Shrink Small Outline Package (EFA) - 4.4mm Body [TSSOP] With 4.3x3.0 Exposed Pad. Micrel Legacy Package eP-TSSOP-24L-PL-1

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

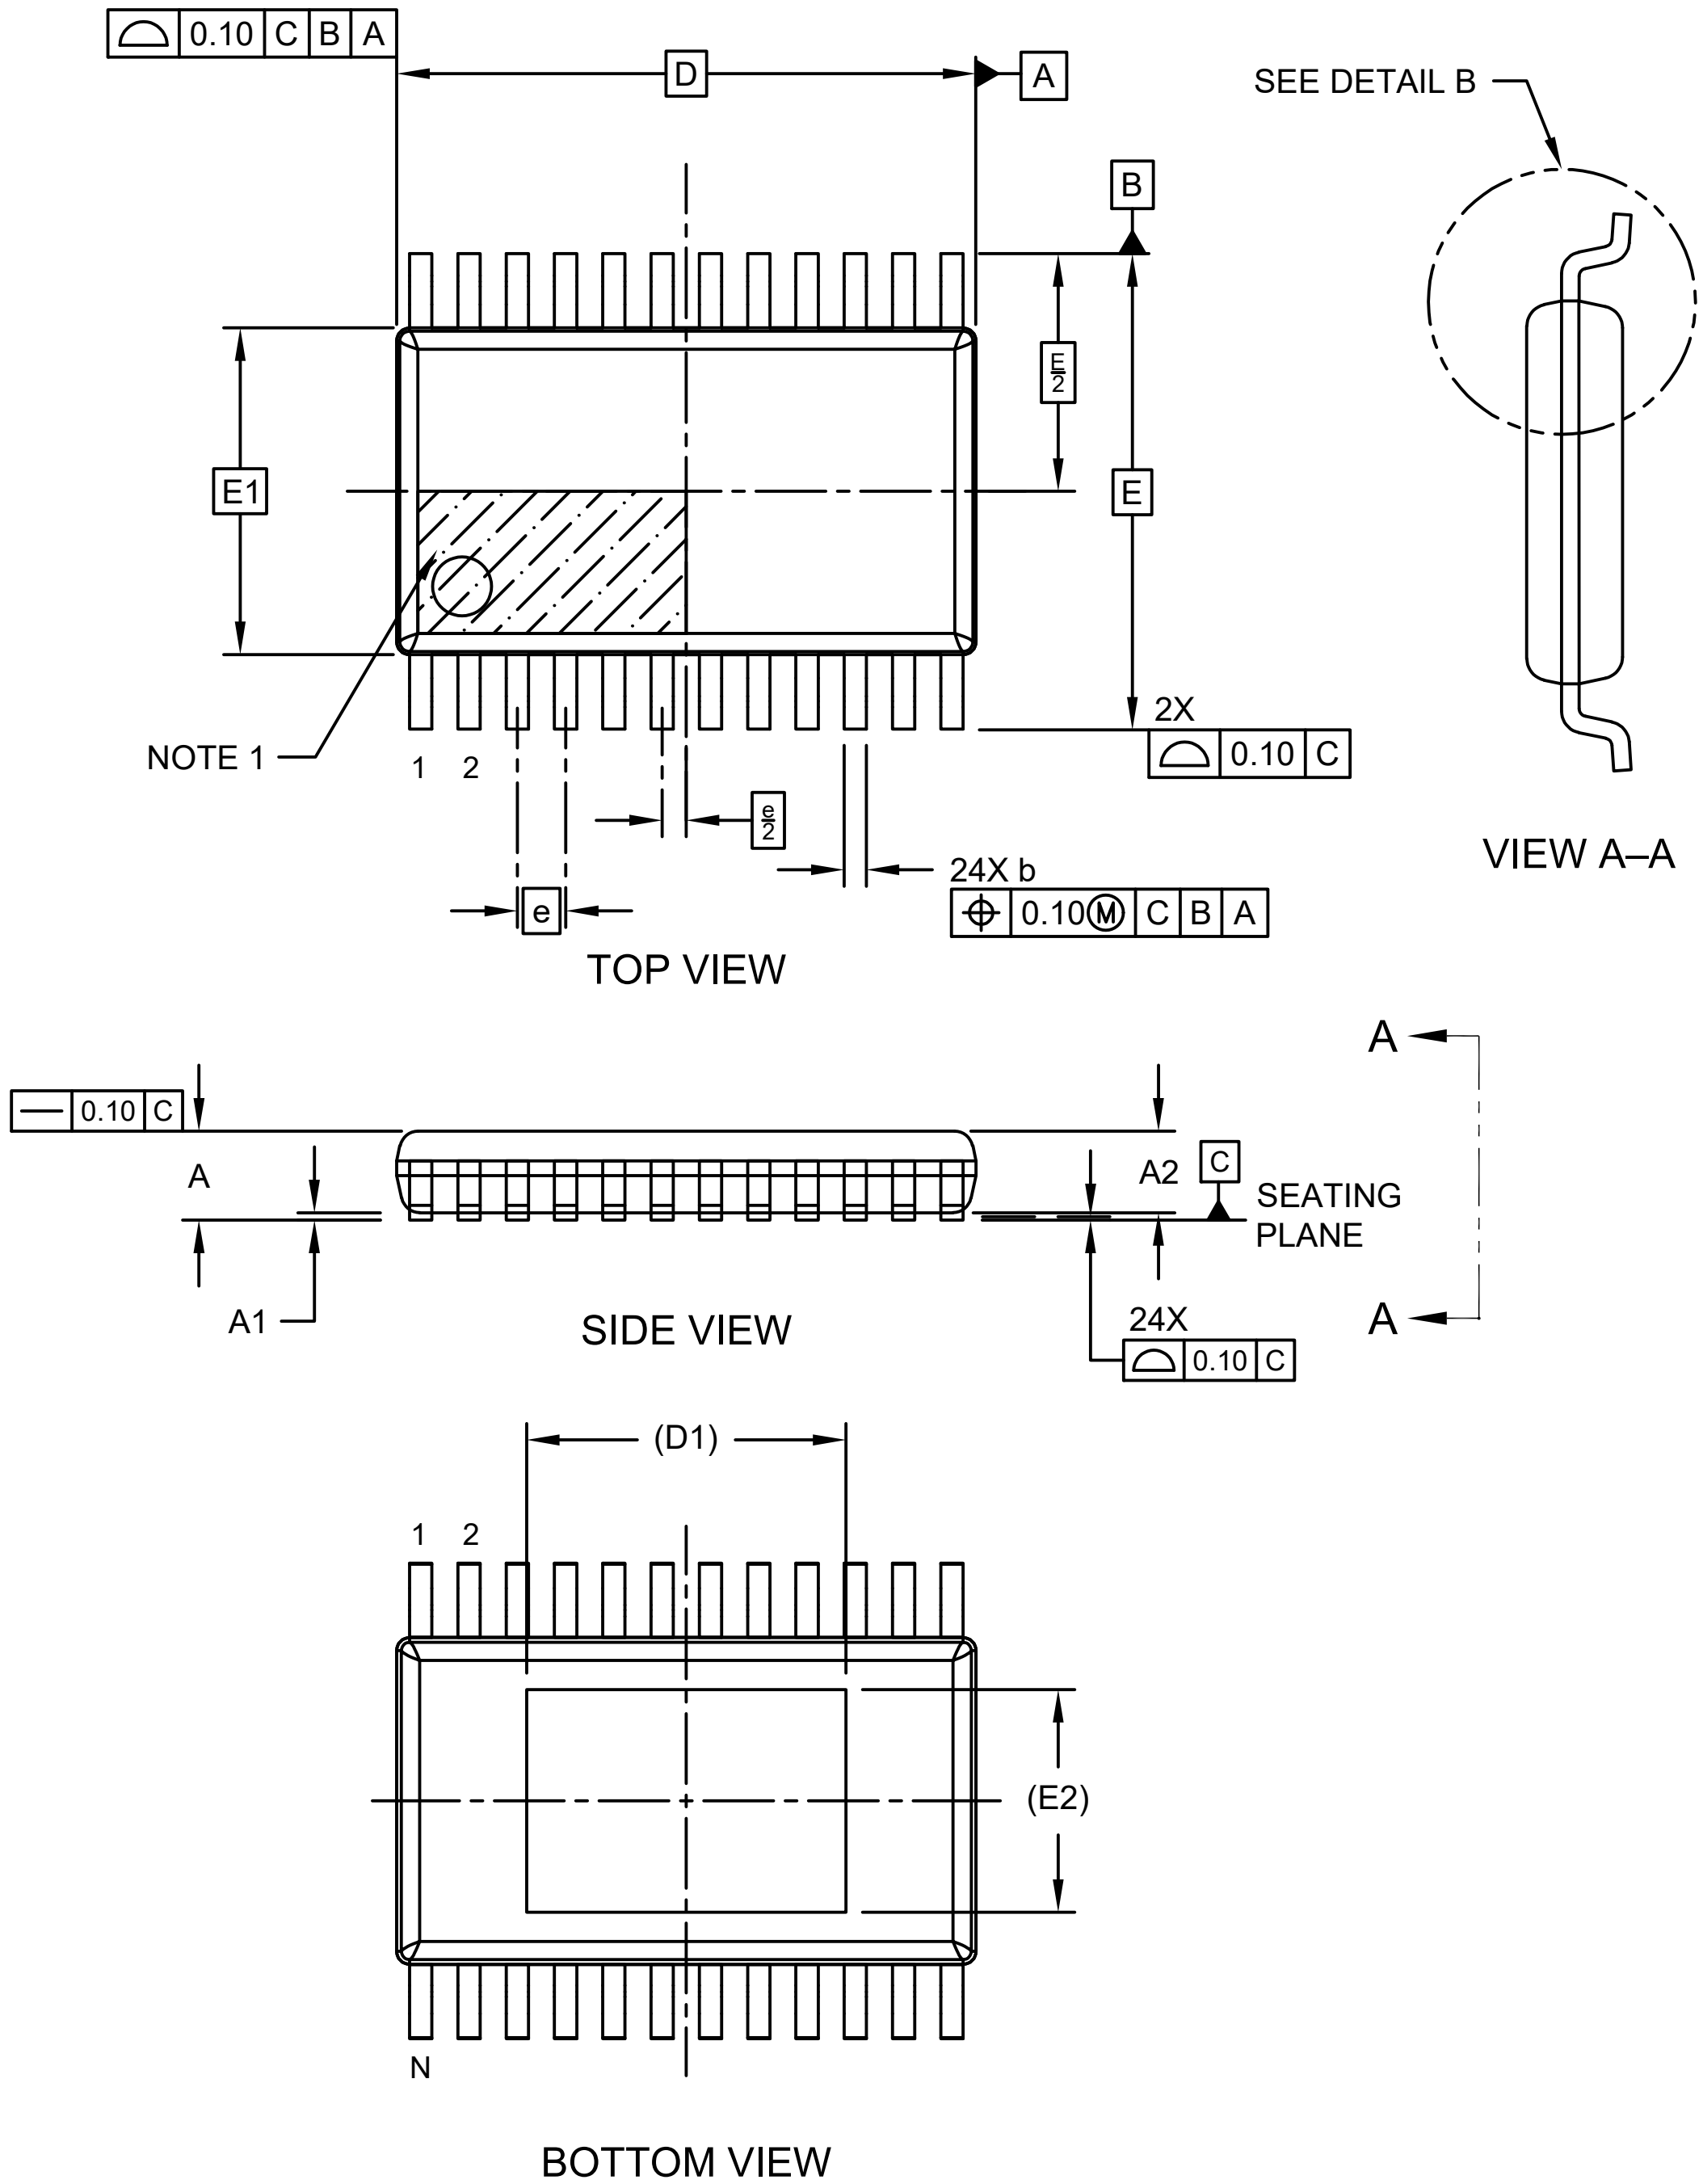

24-Lead Thin Shrink Small Outline Package (EFA) - 4.4mm Body [TSSOP] With 4.3x3.0 Exposed Pad. Micrel Legacy Package eP-TSSOP-24L-PL-1

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

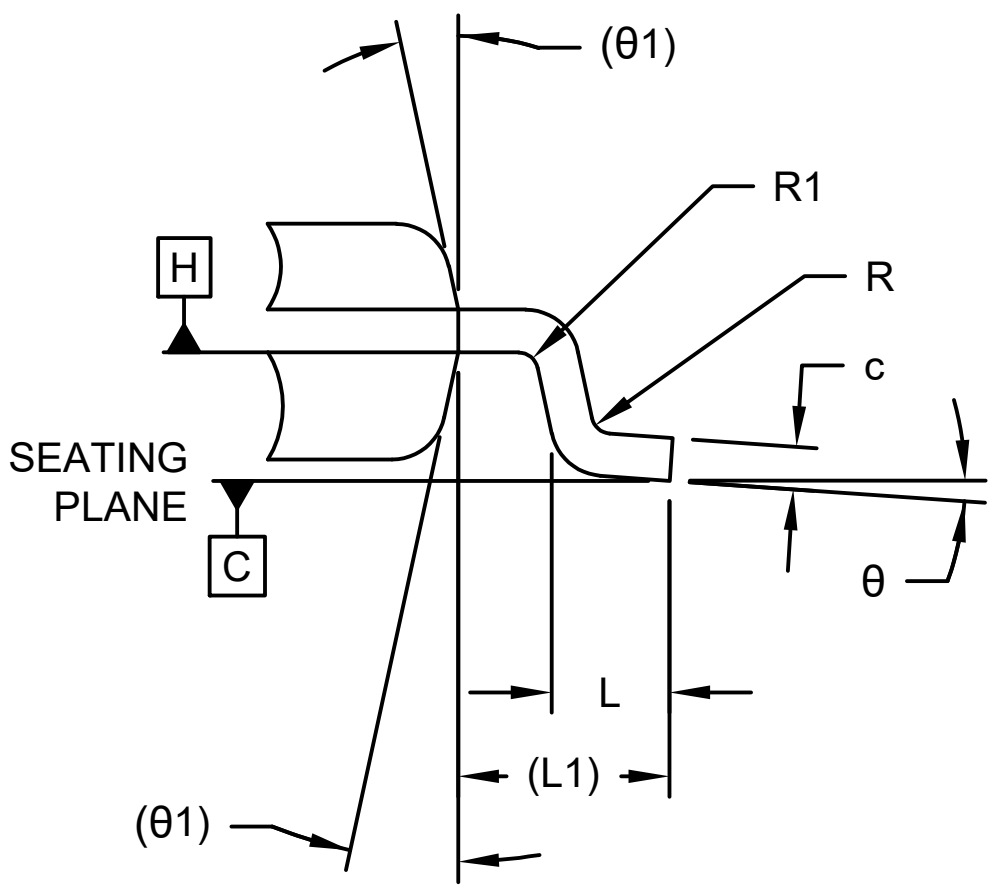

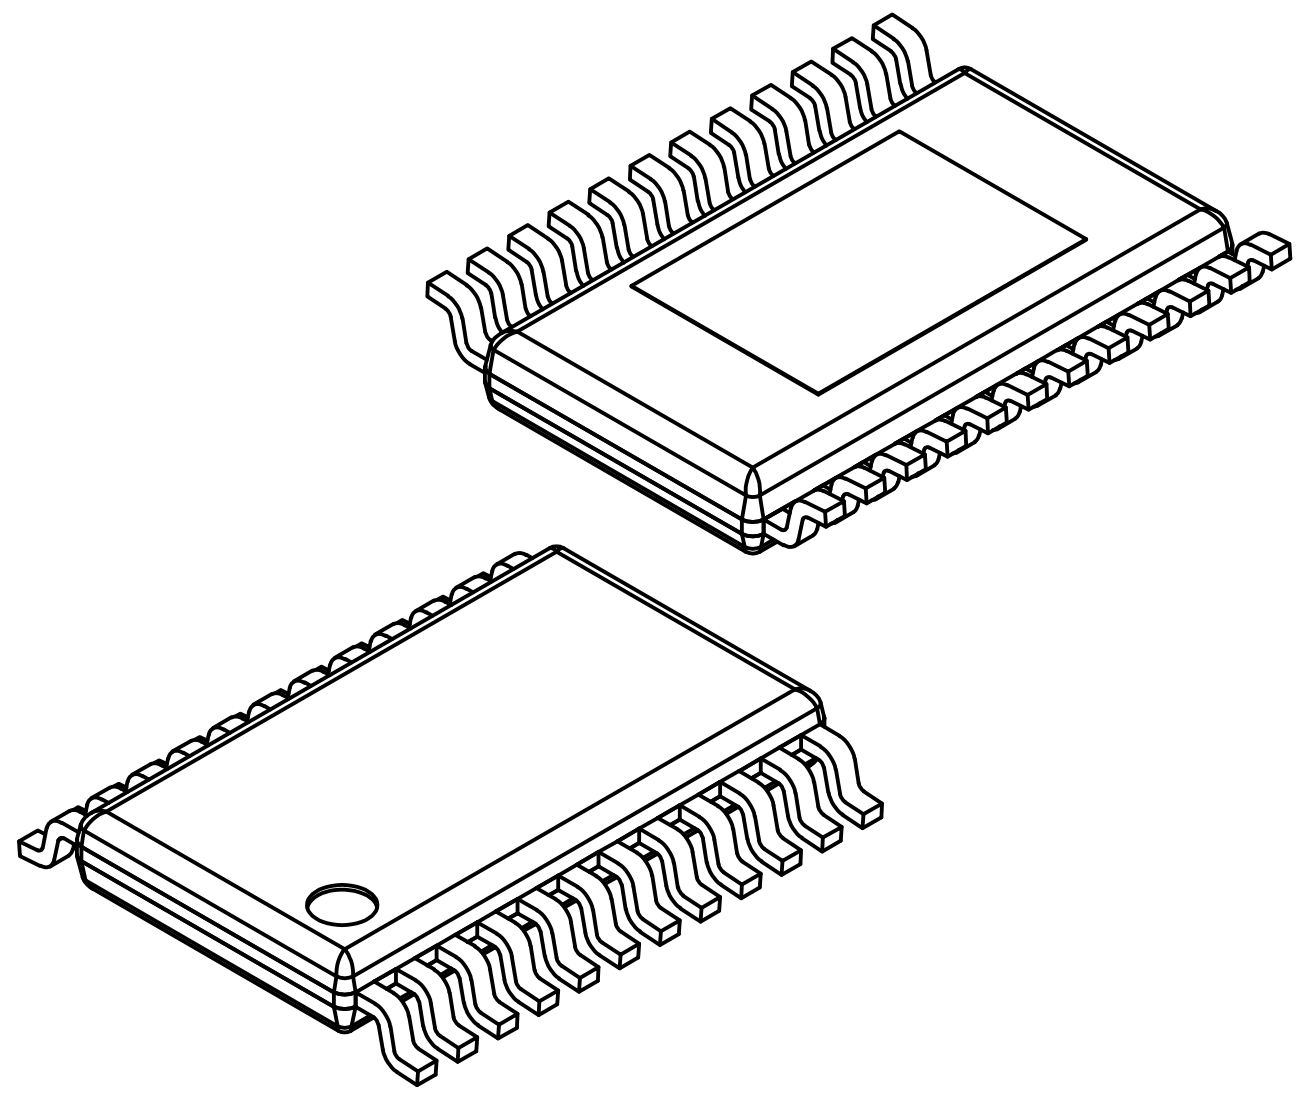

	Units	MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N		24	
Pitch	e		0.65 BSC	
Overall Height	A	–	–	1.20
Standoff	A1	0.05	0.10	0.15
Molded Package Thickness	A2	0.80	0.90	1.05
Overall Length	D		7.80 BSC	
Exposed Pad Length	D1		4.30 REF	
Overall Width	E		6.40 BSC	
Molded Package Width	E1		4.40 BSC	
Exposed Pad Width	E2		3.00 REF	
Terminal Width	b	0.19	0.245	0.30
Terminal Thickness	c	0.11	0.145	0.20
Terminal Length	L	0.45	0.60	0.75
Footprint	L1		1.00 REF	
Lead Bend Radius	R	0.09	-	-
Lead Bend Radius	R1	0.09	-	-
Foot Angle	θ	0°	-	8°
Mold Draft Angle	θ1		12° REF	

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-1186 Rev A Sheet 2 of 2

24-Lead Thin Shrink Small Outline Package (EFA) - 4.4mm Body [TSSOP] With 4.3x3.0 Exposed Pad. Micrel Legacy Package eP-TSSOP-24L-PL-1

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

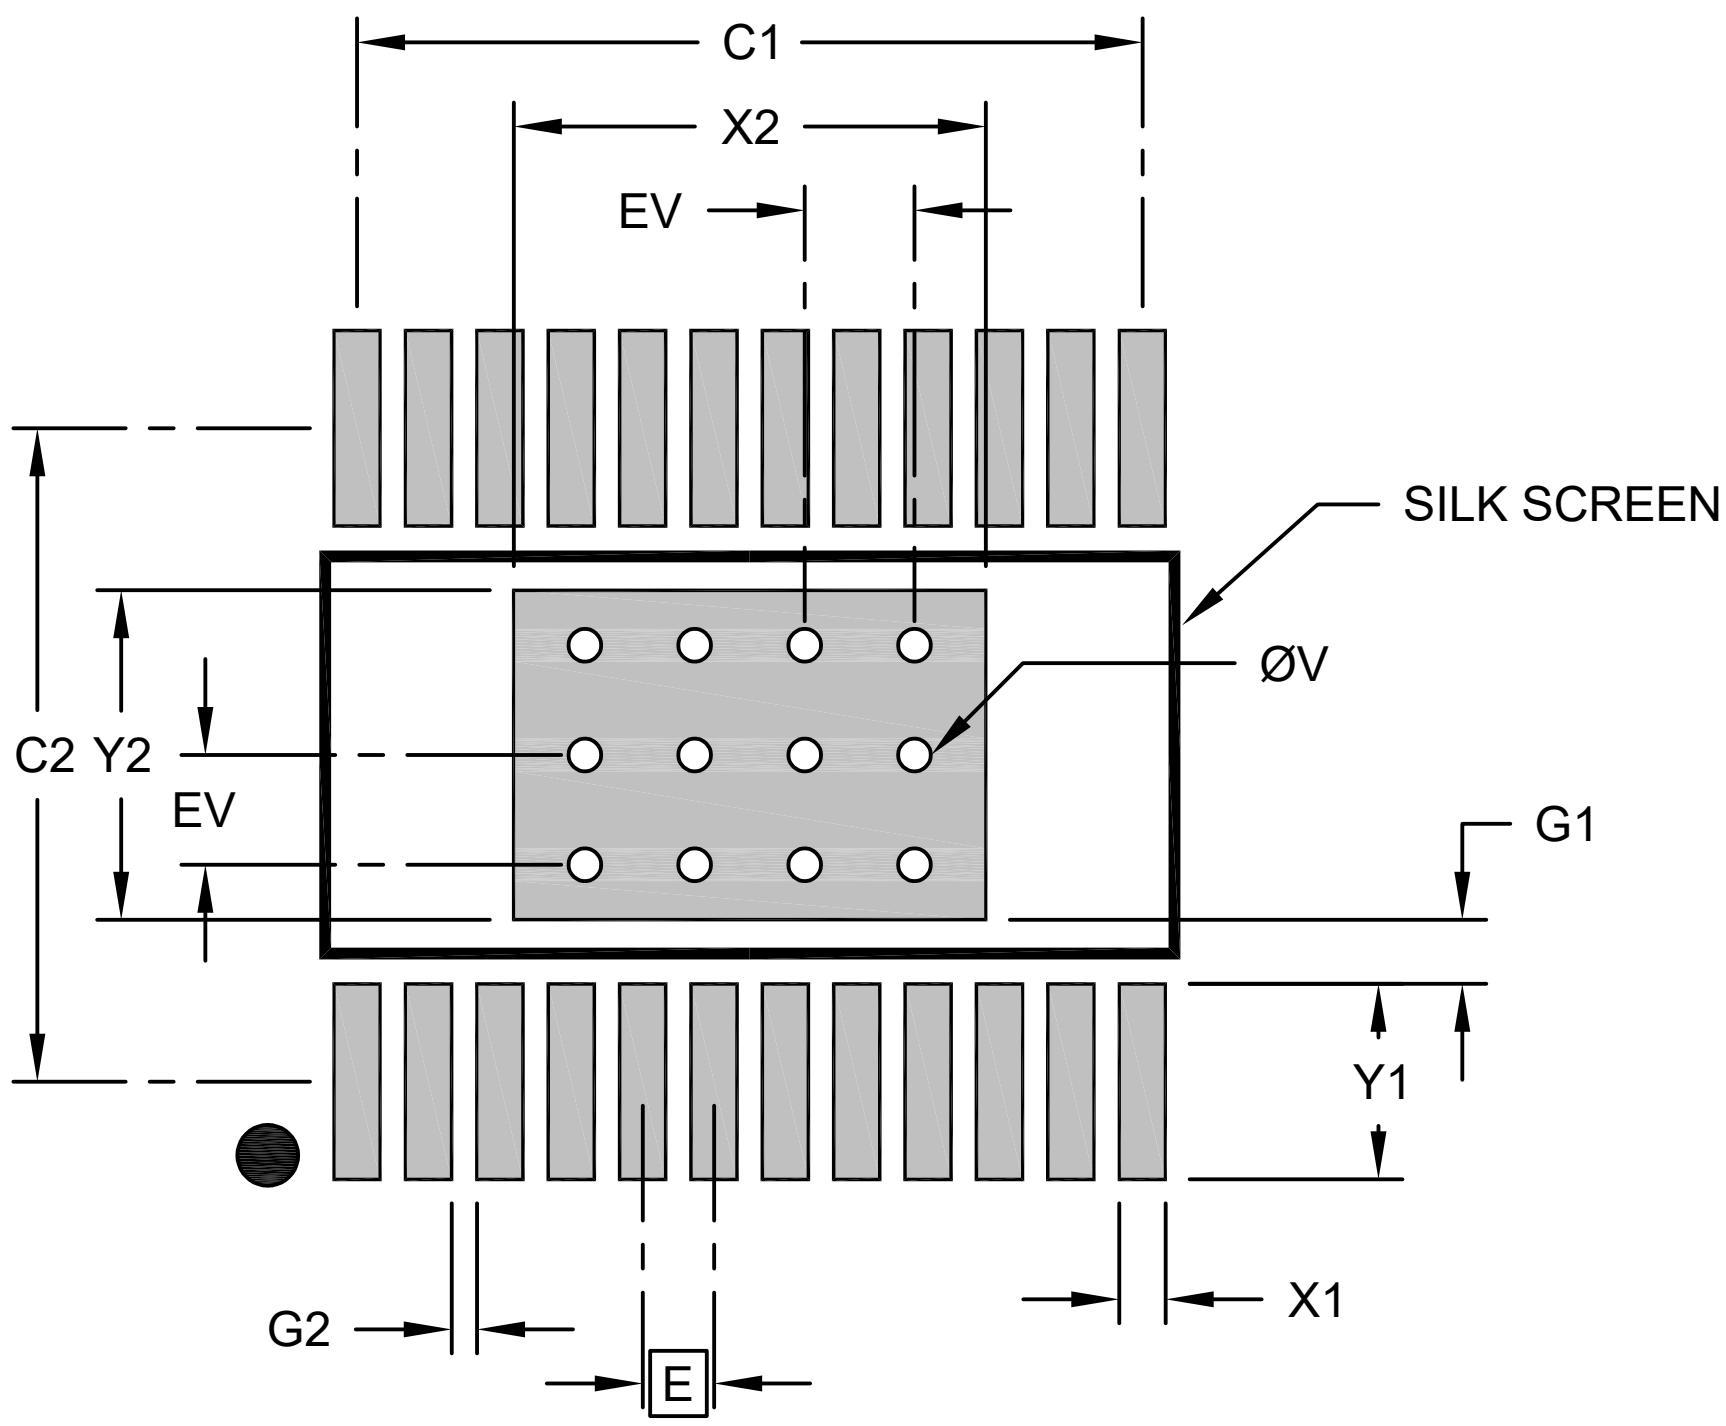

RECOMMENDED LAND PATTERN

	Units	MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.65 BSC		
Center Pad Width	X2			4.30
Center Pad Length	Y2			3.00
Contact Pad Spacing	C1		7.15	
Contact Pad Spacing	C2		5.95	
Contact Pad Width (X24)	X1			0.42
Contact Pad Length (X24)	Y1			1.78
Contact Pad to Center Pad (X24)	G1	0.50		
Contact Pad to Contact Pad (X22)	G2	0.20		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EV		1.00	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

   BSC: Basic Dimension. Theoretically exact value shown without tolerances.

2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3186 Rev A