8-Lead Very Thin Plastic Dual Flat, No Lead Package (4CW) - 2x3x0.9 mm Body [VDFN] 1.6x1.8 mm Exposed Pad Wettable Step Cut Flanks

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

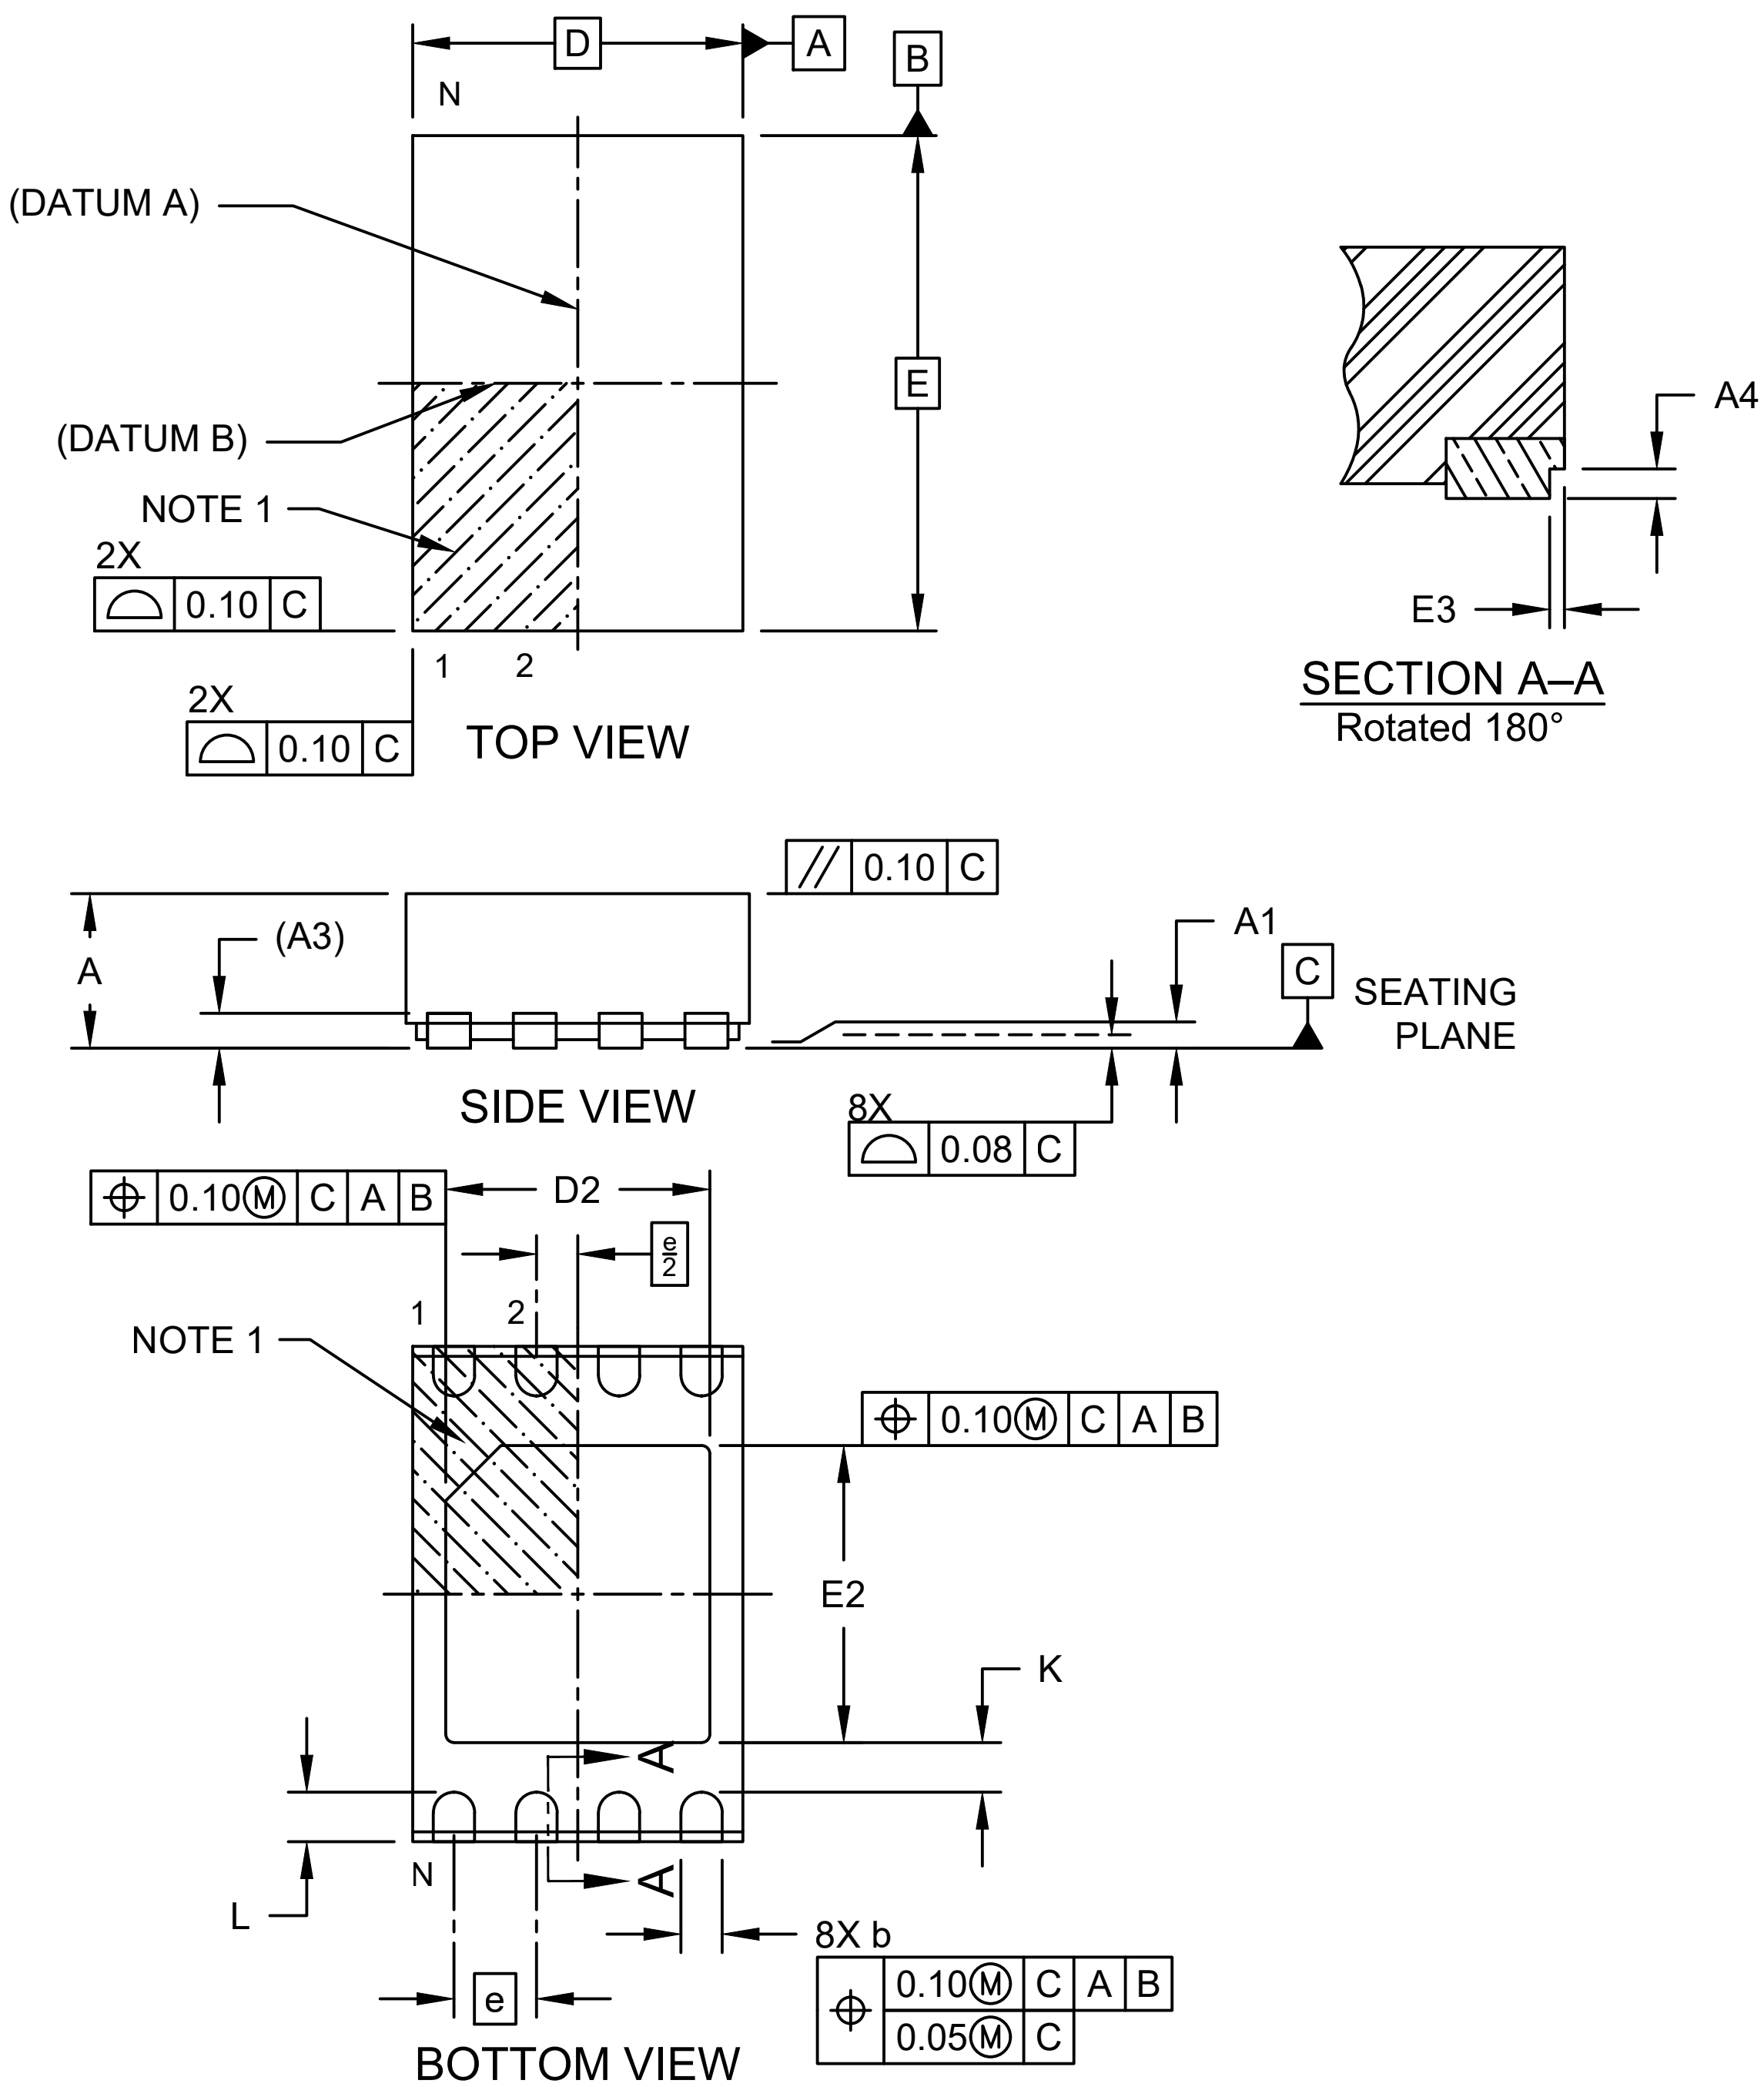

Microchip Technology Drawing C04-00581 Rev B Sheet 1 of 2

8-Lead Very Thin Plastic Dual Flat, No Lead Package (4CW) - 2x3x0.9 mm Body [VDFN] 1.6x1.8 mm Exposed Pad Wettable Step Cut Flanks

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

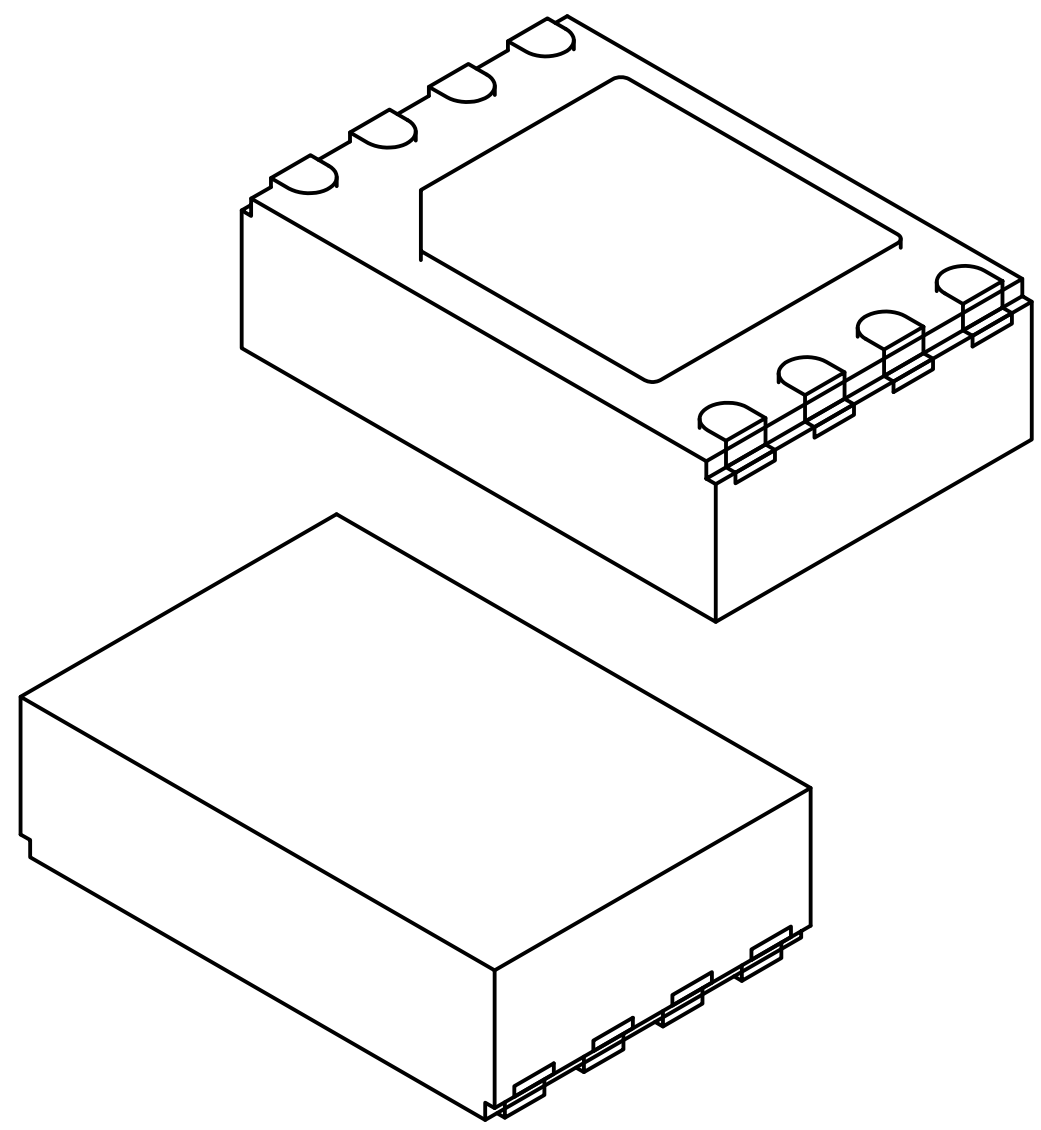

	Units	MILLIMETERS		
	Dimension Limits	MIN	NOM	MAX
Number of Terminals	N	008		
Pitch	e	0.50 BSC		
Overall Height	A	0.80	0.90	1.00
Standoff	A1	0.00	0.02	0.50
Terminal Thickness	A3	0.20 REF		
Overall Length	D	2.00 BSC		
Exposed Pad Length	D2	1.70	1.80	1.90
Overall Width	E	3.00 BSC		
Exposed Pad Width	E2	1.50	1.60	1.70
Terminal Width	b	0.20	0.25	0.30
Terminal Length	L	0.20	0.30	0.40
Terminal-to-Exposed-Pad	K	0.20	–	–
Wettable Flank Step Cut Width	E3	0.035	0.06	0.085
Wettable Flank Step Cut Depth	A4	0.100	–	0.190

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated.
3. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-00581 Rev B Sheet 2 of 2

8-Lead Very Thin Plastic Dual Flat, No Lead Package (4CW) - 2x3x0.9 mm Body [VDFN] 1.6x1.8 mm Exposed Pad Wettable Step Cut Flanks

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

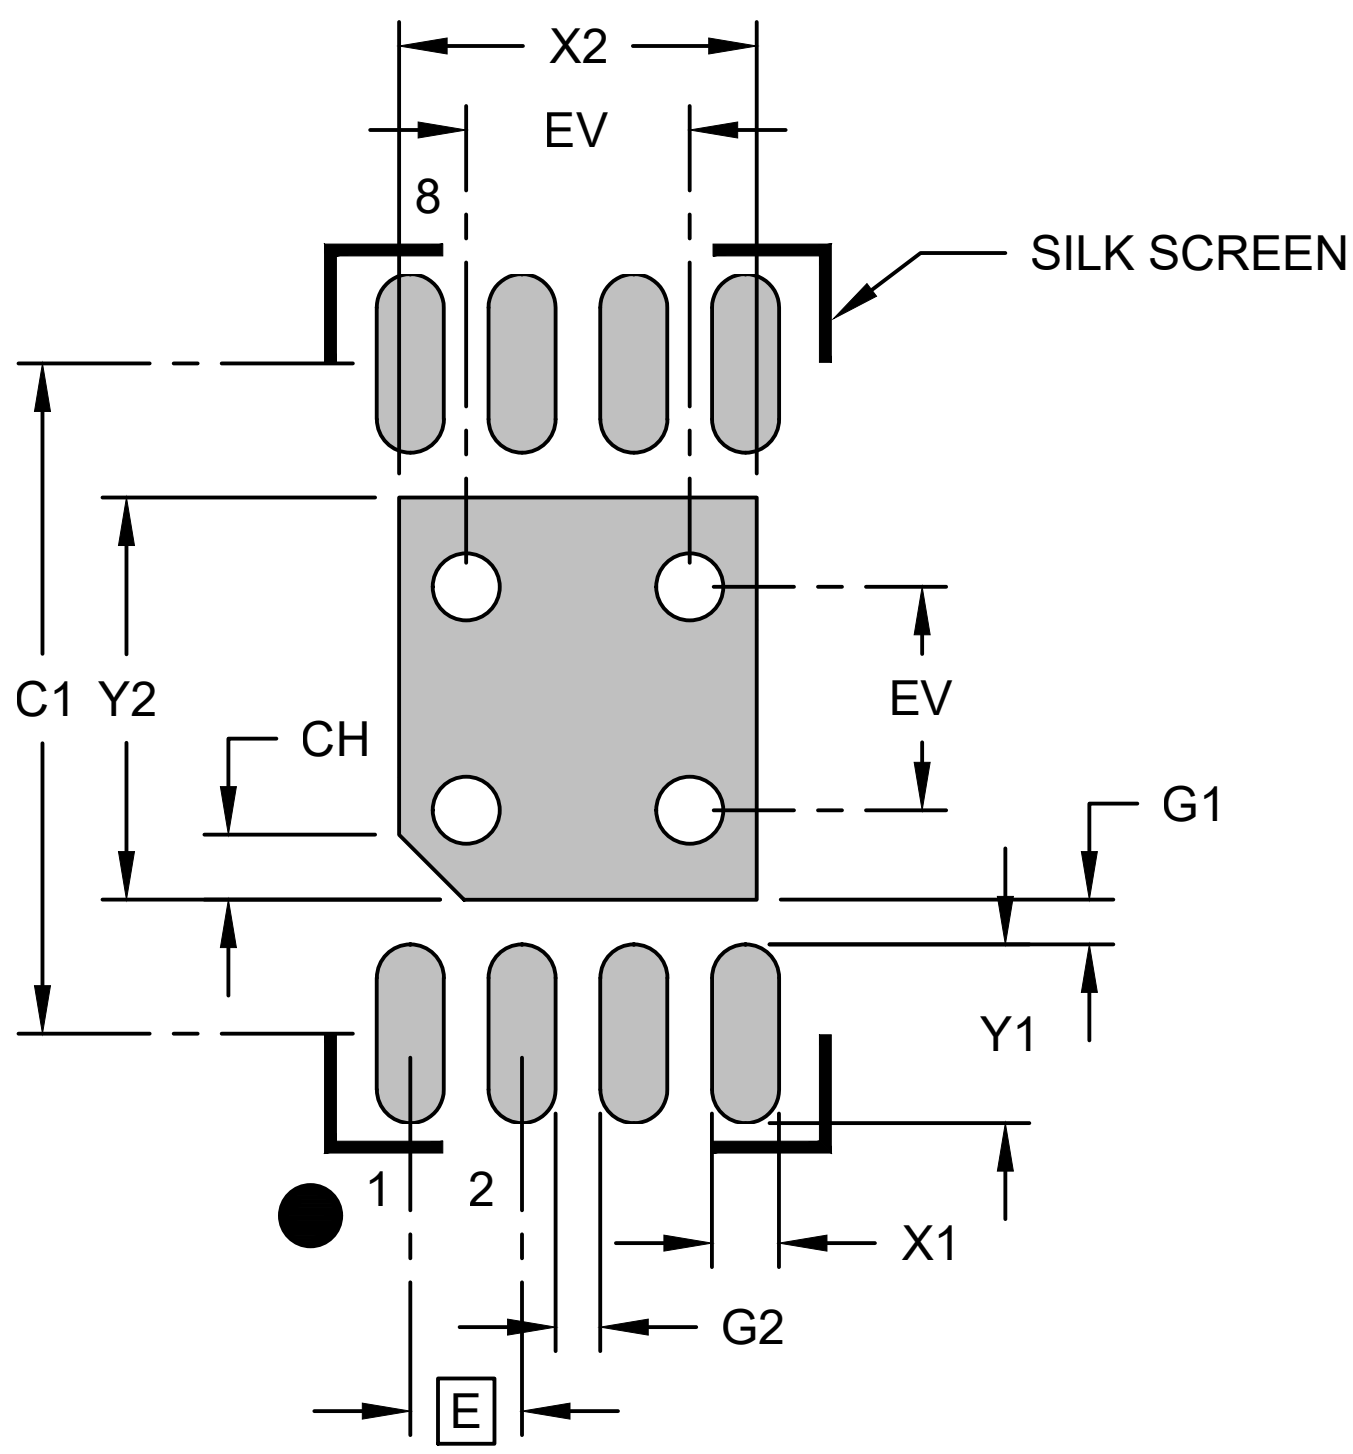

RECOMMENDED LAND PATTERN

		Units	MILLIMETERS	
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E		0.50 BSC	
Center Pad Width	X2			1.60
Center Pad Length	Y2			1.80
Contact Pad Spacing	C1		3.00	
Contact Pad Width (X8)	X1			0.30
Contact Pad Length (X8)	Y1			0.80
Pin 1 Index Chamfer	CH		0.30	
Contact Pad to Center Pad (X8)	G1	0.20		
Contact Pad to Contact Pad (X6)	G2	0.20		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EV		1.00	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during the reflow process.

Microchip Technology Drawing C04-02581 Rev B