



32-Lead Plastic Thin Small Outline Package (TP) - 8x14 mm Body [TSOP] SST Legacy Package WHE

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

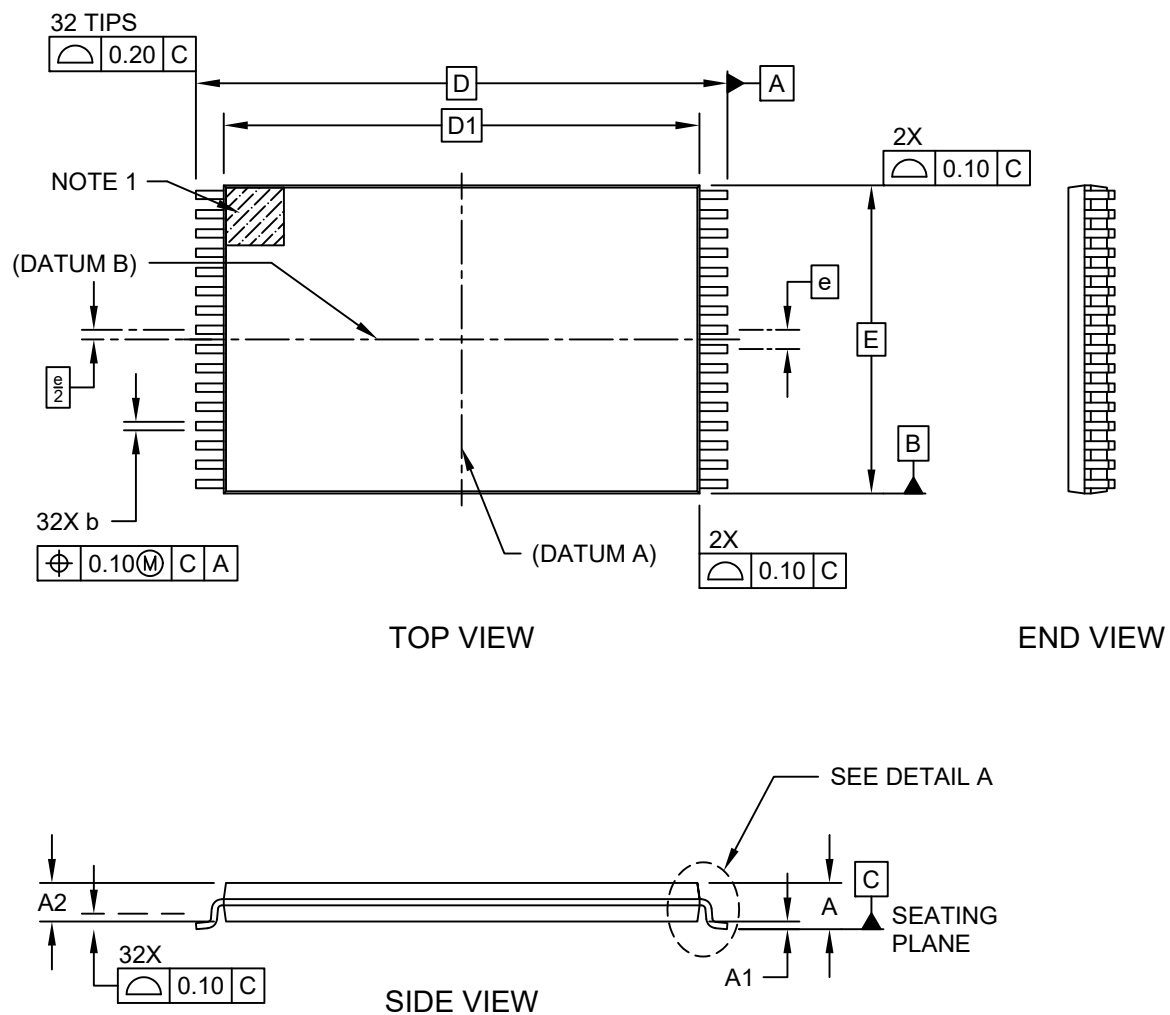

32-Lead Plastic Thin Small Outline Package (TP) - 8x14 mm Body [TSOP] SST Legacy Package WHE

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

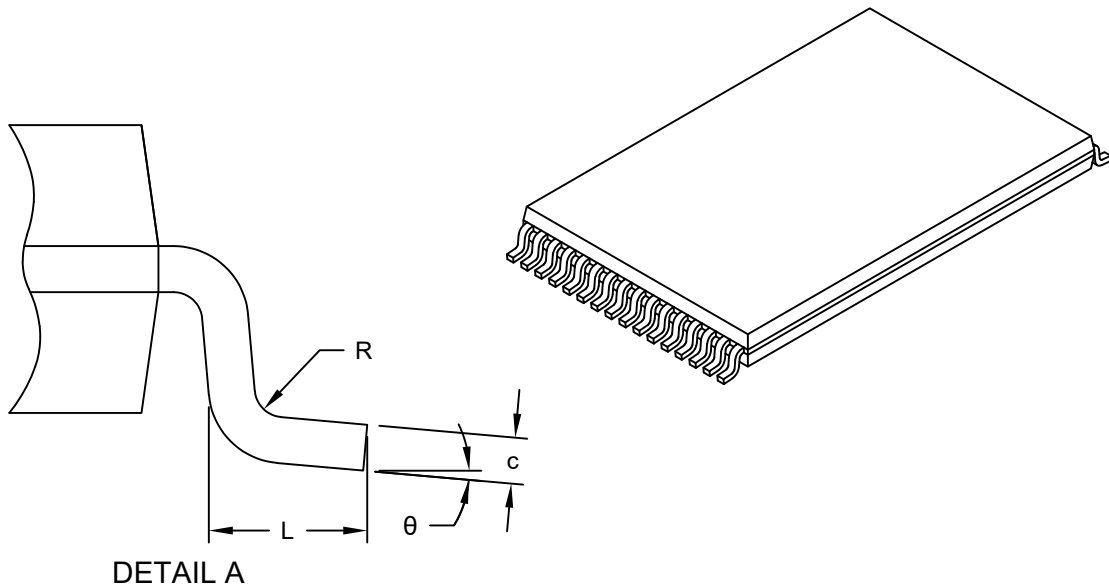


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	32		
Pitch	e	0.50 BSC		
Overall Height	A	-	-	1.20
Standoff	A1	0.05	0.10	0.15
Molded Package Thickness	A2	0.95	1.00	1.05
Overall Length	D	14.00 BSC		
Molded Package Length	D1	12.40 BSC		
Overall Width	E	8.00 BSC		
Terminal Thickness	c	0.10	-	0.21
Terminal Width	b	0.17	0.22	0.27
Terminal Length	L	0.50	0.60	0.70
Foot Angle	θ	0°	5°	8°
Terminal Bend Radius	R	0.08	-	0.35

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensions D1 and E do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.15 mm per side.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

32-Lead Plastic Thin Small Outline Package (TP) - 8x14 mm Body [TSOP] SST Legacy Package WHE

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

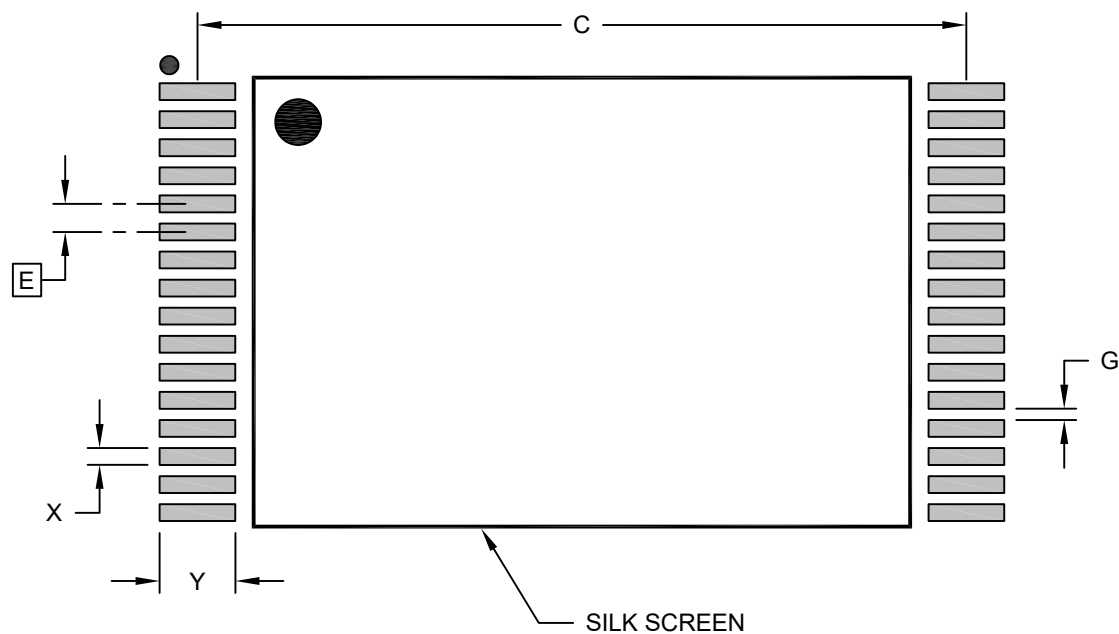

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Contact Pad Spacing	C		13.70	
Contact Pad Width (X32)	X			0.30
Contact Pad Length (X32)	Y			1.35
Contact Pad to Contact Pad (X30)	G1	0.20		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.