


APPROVED

By nlong at 8:31 am, Nov 13, 2014


**128-Lead Plastic Quad Flat, No Lead Package (Z7) - 14x14x1.0 mm Body [TQFP]
With 5.0x5.0 mm Exposed Pad**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

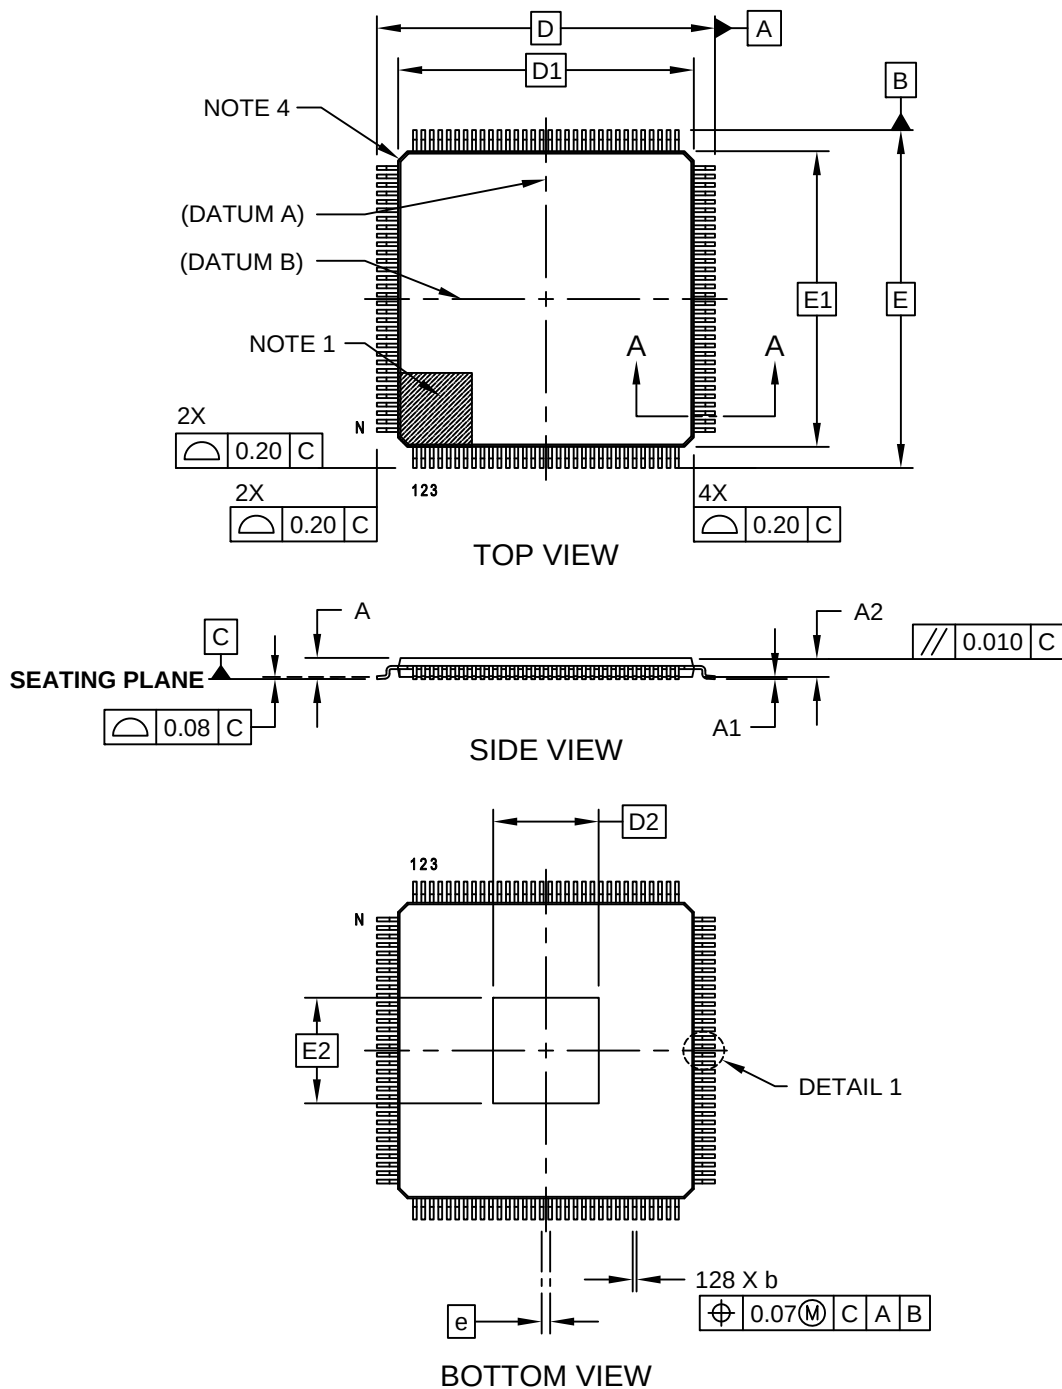

**128-Lead Plastic Quad Flat, No Lead Package (Z7) - 14x14x1.0 mm Body [TQFP]
With 5.0x5.0 mm Exposed Pad**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

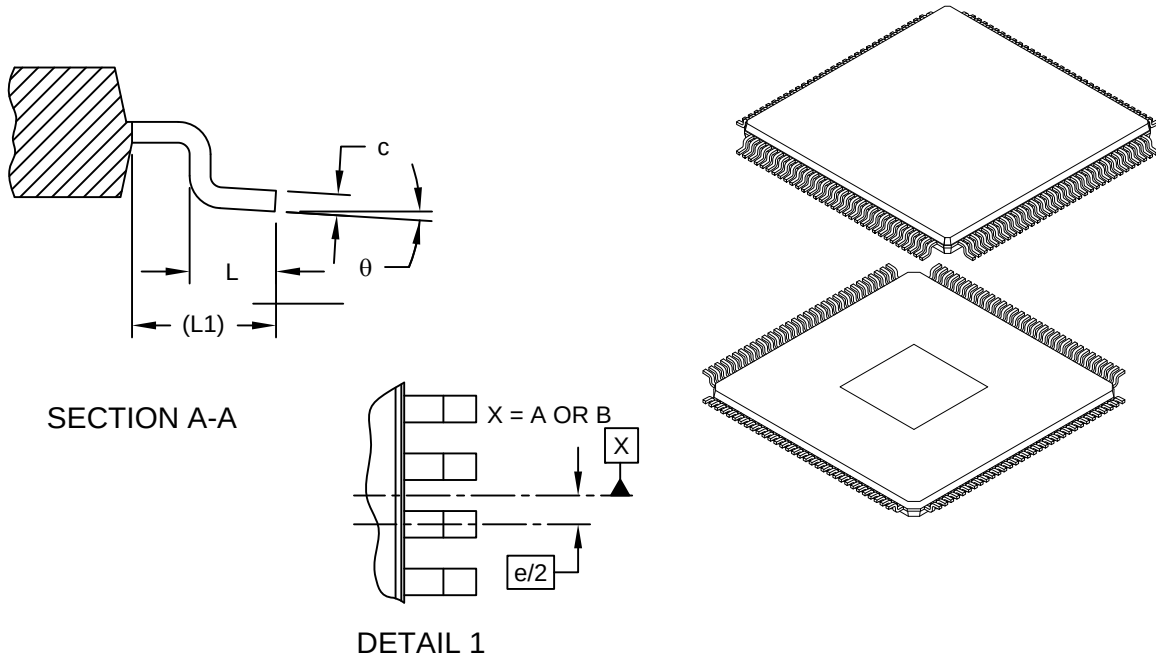

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Pins	N		128		
Pitch	e		0.40 BSC		
Overall Height	A		0.80	0.90	1.20
Standoff	A1		0.05	-	0.15
Terminal Thickness	A2		0.95	1.00	1.05
Overall Width	E		16.00 BSC		
Molded Package Width	E1		14.00 BSC		
Exposed Pad Width	E2		4.90	5.00	5.10
Overall Length	D		16.00 BSC		
Molded Package Length	D1		14.00 BSC		
Exposed Pad Length	D2		4.90	5.00	5.10
Terminal Width	b		0.13	0.18	0.23
Terminal Thickness	c		0.09	-	0.20
Terminal Length	L		0.45	0.60	0.75
Footprint	(L1)		1.00 REF		
Foot Angle	θ		0°	3.5°	7°

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.
- Exact shape of each corner is optional.