




196-Ball Low Profile Fine Pitch Ball Grid Array (RG) - 12x12x1.4 mm Body [LFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

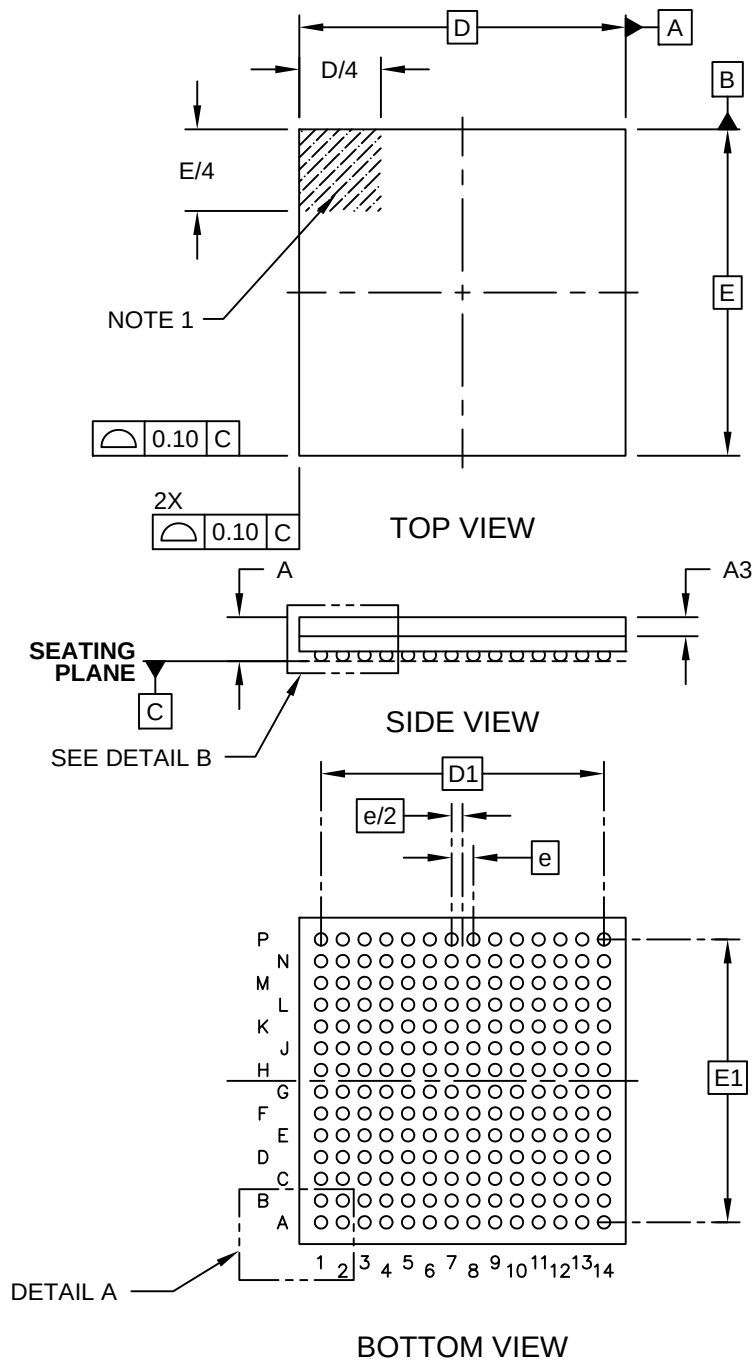

196-Ball Low Profile Fine Pitch Ball Grid Array (RG) - 12x12x1.4 mm Body [LFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

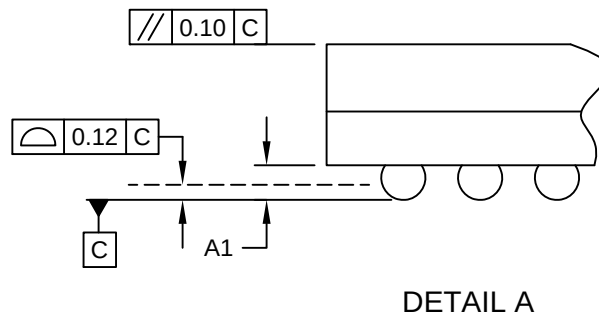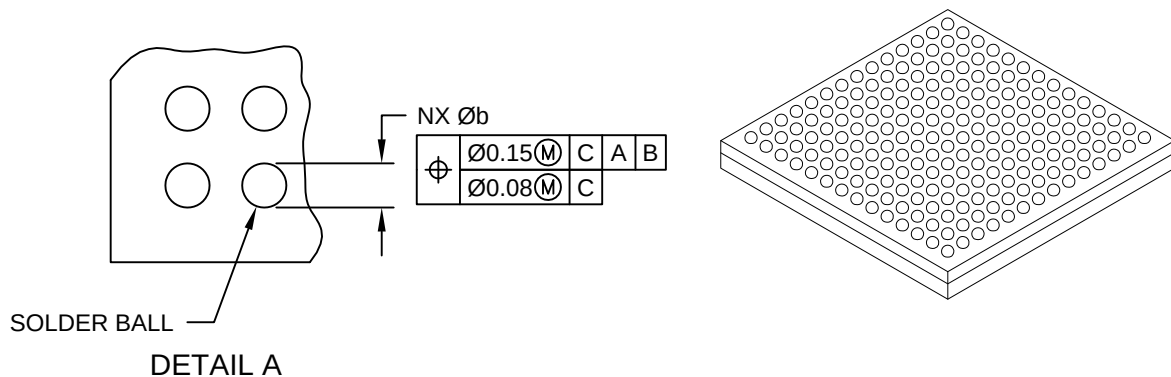


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Pins	N	196		
Pitch	e	0.80 BSC		
Overall Height	A	1.52	1.62	1.70
Standoff	A1	0.31	0.36	0.41
Molded Cap Thickness	A3	0.70 REF		
Overall Width	E	12.00 BSC		
Overall Ball Pitch	E1	10.40 BSC		
Overall Length	D	12.00 BSC		
Overall Ball Pitch	D1	10.40 BSC		
Ball Diameter	Øb	0.41	0.46	0.51

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.

196-Ball Low Profile Fine Pitch Ball Grid Array (RG) - 12x12x1.4 mm Body [LFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

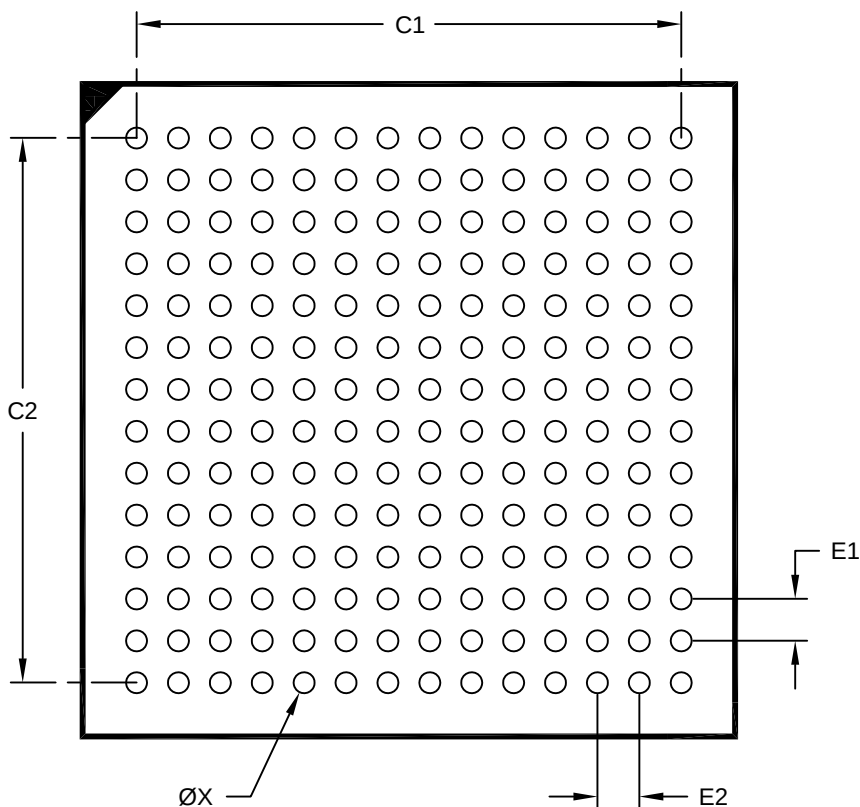

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E1	0.80 BSC		
Contact Pitch	E2	0.80 BSC		
Contact Pad Spacing	C1		10.40	
Contact Pad Spacing	C2		10.40	
Contact Pad Diameter (X196)	X			0.40

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.