



52-Lead Metric Plastic Quad Flat Pack (U9) - 10x10 mm Body [PQFP] Supertex Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

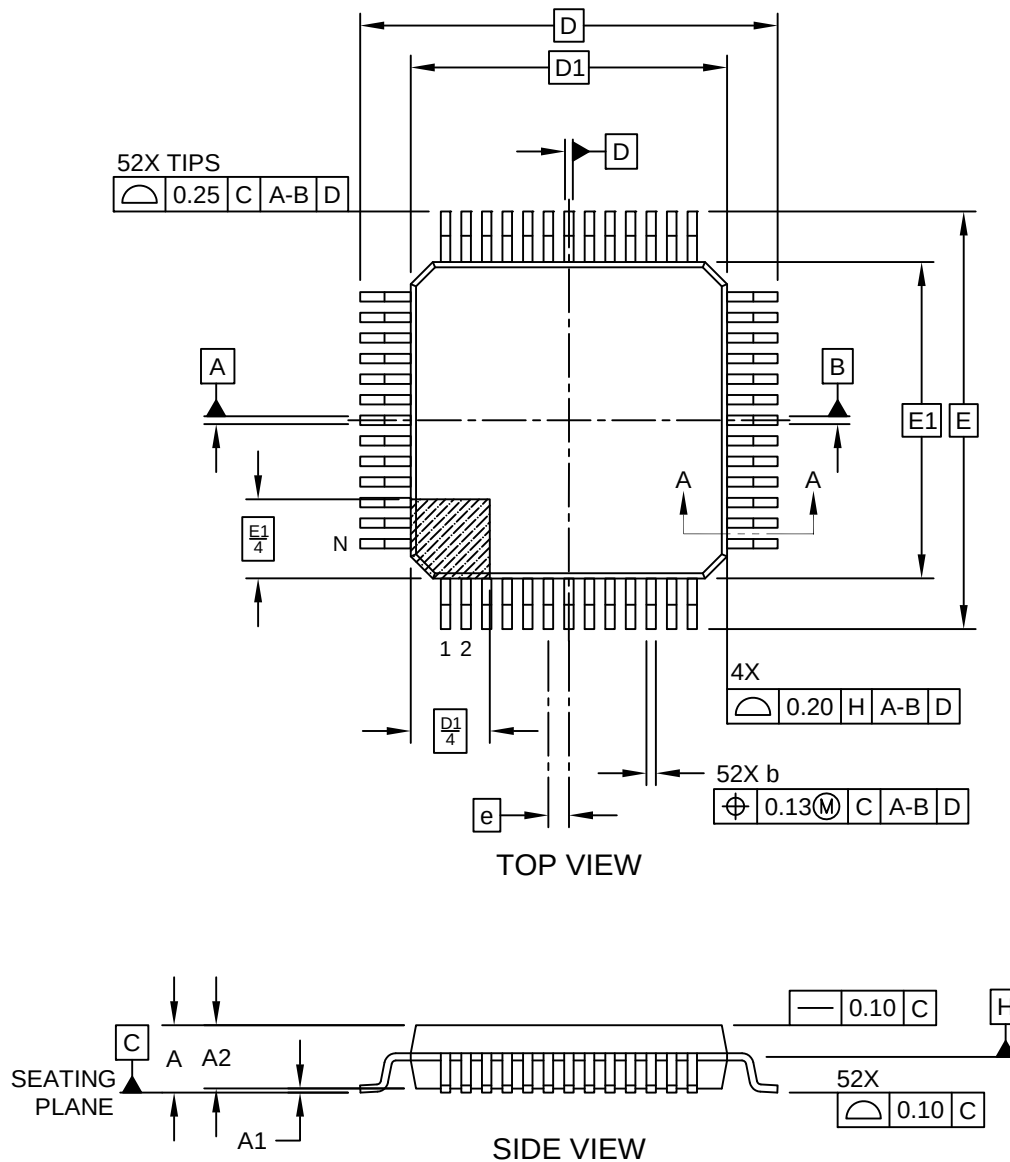

52-Lead Metric Plastic Quad Flat Pack (U9) - 10x10 mm Body [PQFP] Supertex Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

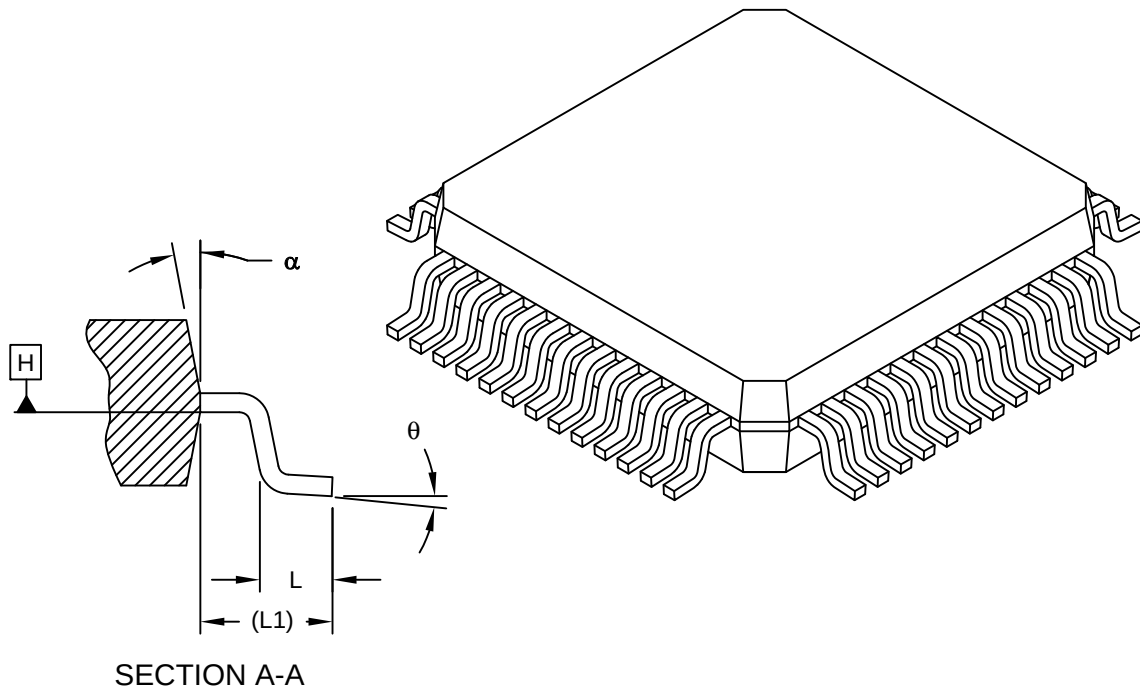


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Leads	N		52		
Lead Pitch	e		1.60 BSC		
Overall Height	A		1.80	2.13	2.45
Standoff	A1		0.00	0.13	0.25
Molded Package Thickness	A2		1.80	2.00	2.20
Foot Length	L		0.73	0.88	1.03
Footprint	L1		1.60 REF		
Foot Angle	θ		0°	3.5°	7°
Overall Width	E		13.20 BSC		
Overall Length	D		13.20 BSC		
Molded Package Width	E1		10.00 BSC		
Molded Package Length	D1		10.00 BSC		
Lead Width	b		0.22	-	0.40
Mold Draft Angle Top	α		5°	-	16°

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

52-Lead Metric Plastic Quad Flat Pack (U9) - 10x10 mm Body [PQFP] Supertex Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

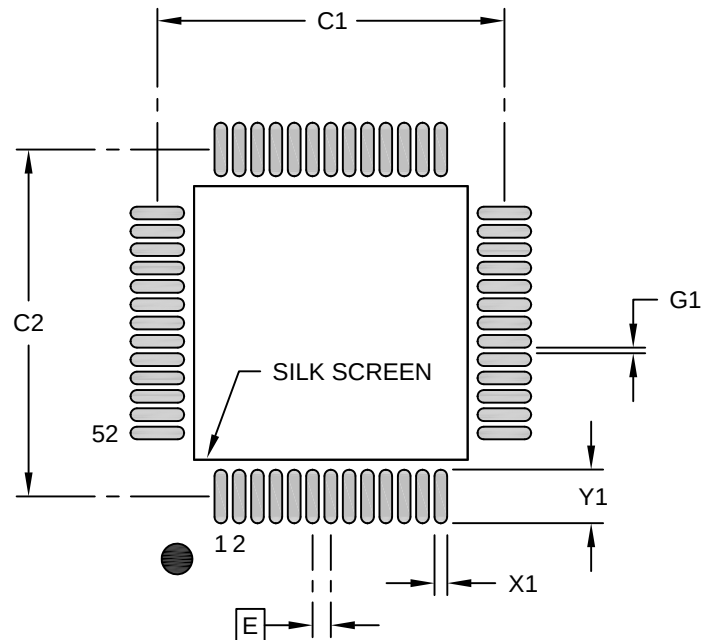

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.65 BSC		
Contact Pad Spacing	C1		12.30	
Contact Pad Spacing	C2		12.30	
Contact Pad Width (X52)	X1			0.45
Contact Pad Length (X52)	Y1			1.90
Contact Pad to Contact Pad (X48)	G	0.20		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2326A