



529-Ball Low Profile Fine-Pitch Ball Grid Array Package (2BW) - 19x19x1.7 mm Body [LFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

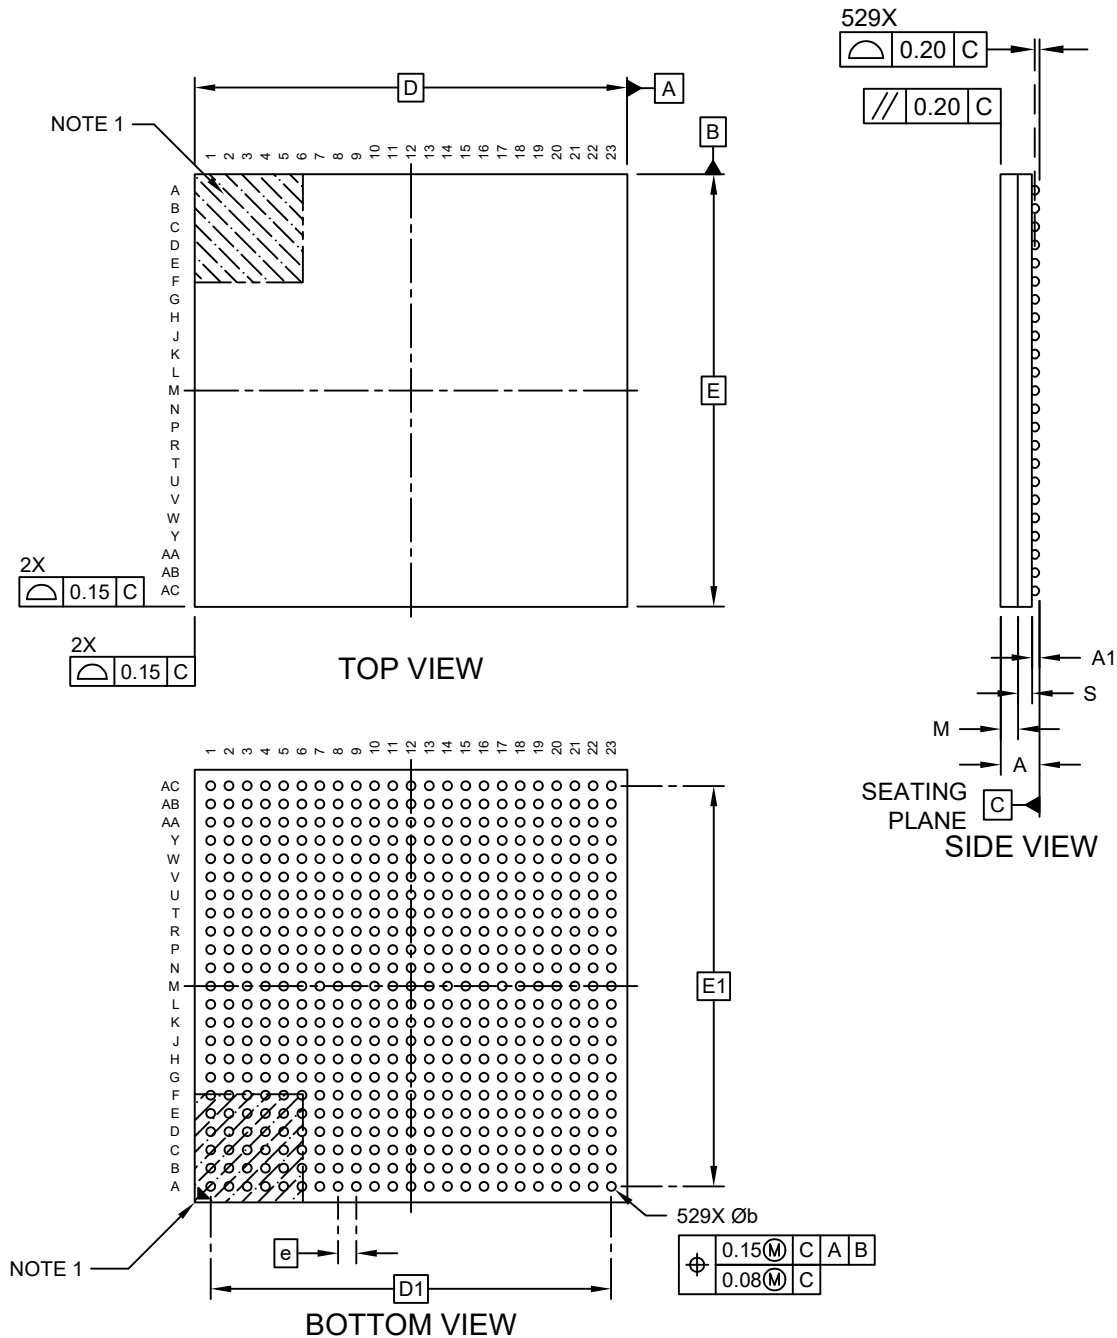

529-Ball Low Profile Fine-Pitch Ball Grid Array Package (2BW) - 19x19x1.7 mm Body [LFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

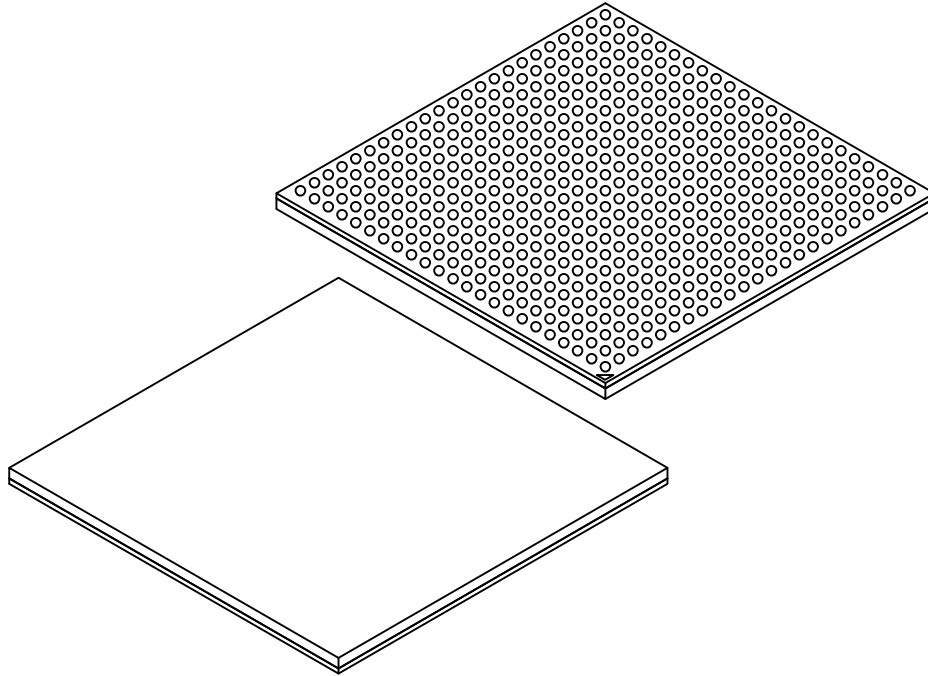


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	529		
Pitch	e	0.80 BSC		
Overall Height	A	–	–	1.70
Ball Height	A1	0.27	–	0.37
Mold Thickness	M	0.70 REF		
Substrate Thickness	S	0.558 REF		
Overall Length	D	19.00 BSC		
Ball Array Length	D1	17.60 BSC		
Overall Width	E	19.00 BSC		
Ball Array Width	E1	17.60 BSC		
Ball Width	b	0.38	–	0.48
Ball Diameter		0.40 REF		

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

529-Ball Low Profile Fine-Pitch Ball Grid Array Package (2BW) - 19x19x1.7 mm Body [LFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

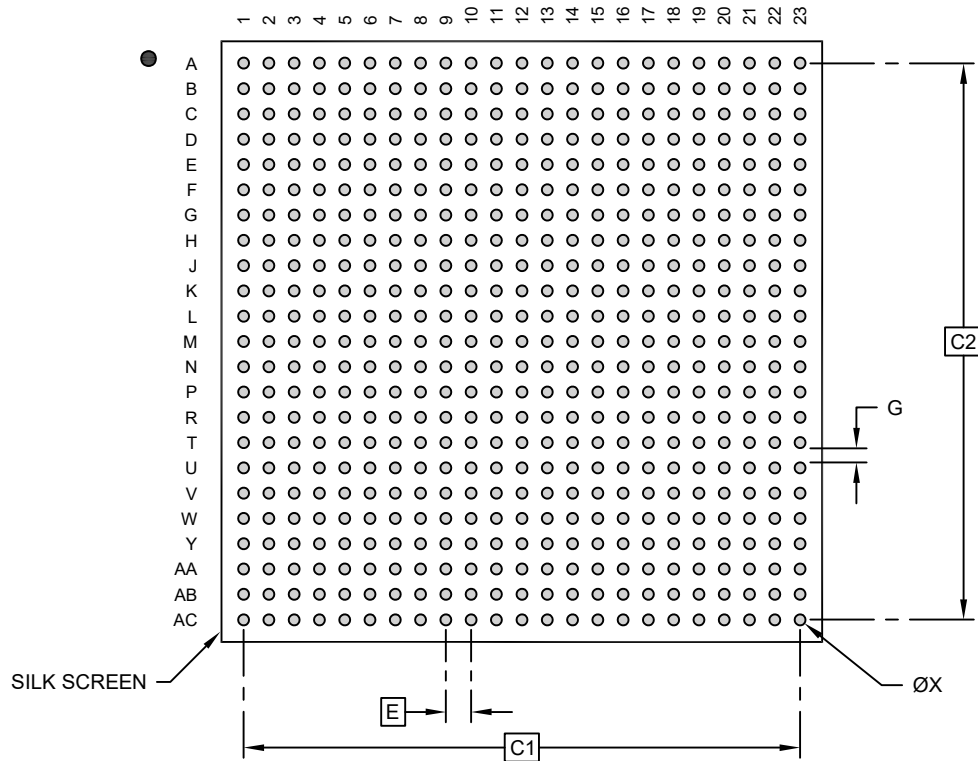

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.80 BSC		
Contact Pad Spacing	C1	17.60 BSC		
Contact Pad Spacing	C2	17.60 BSC		
Contact Pad Diameter	X			0.35
Contact Pad to Contact Pad	G	0.45		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.