



64-Ball Very Thin Fine-Pitch Ball Grid Array (2HW) - 5.5x5.5x0.92 mm Body [VFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

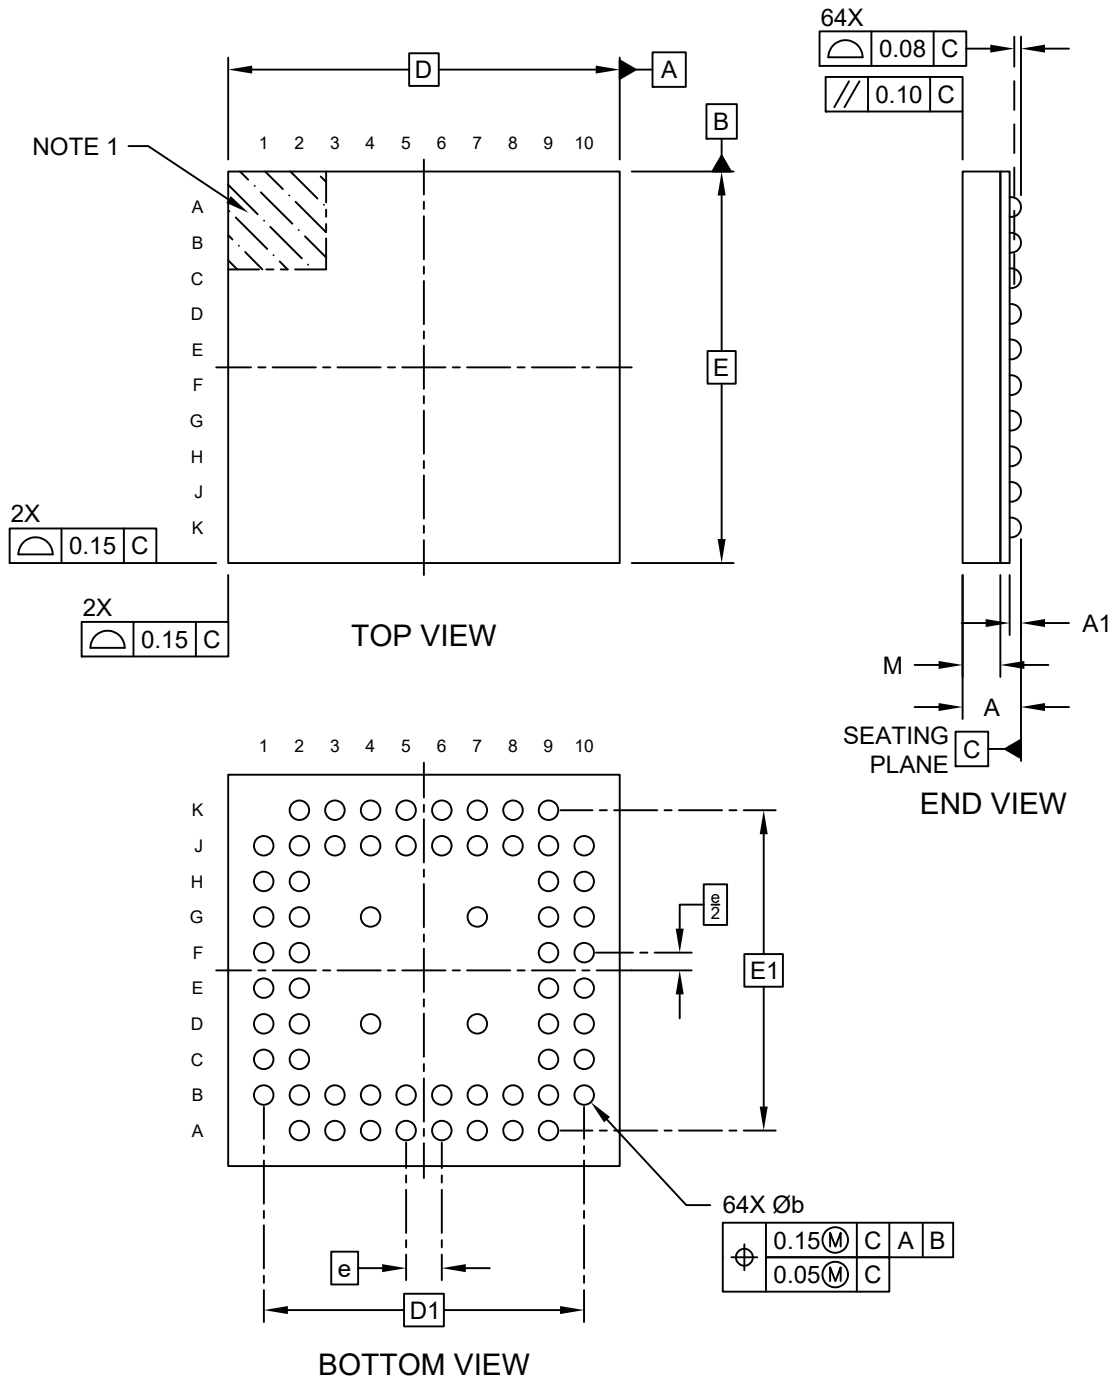

64-Ball Very Thin Fine-Pitch Ball Grid Array (2HW) - 5.5x5.5x0.92 mm Body [VFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

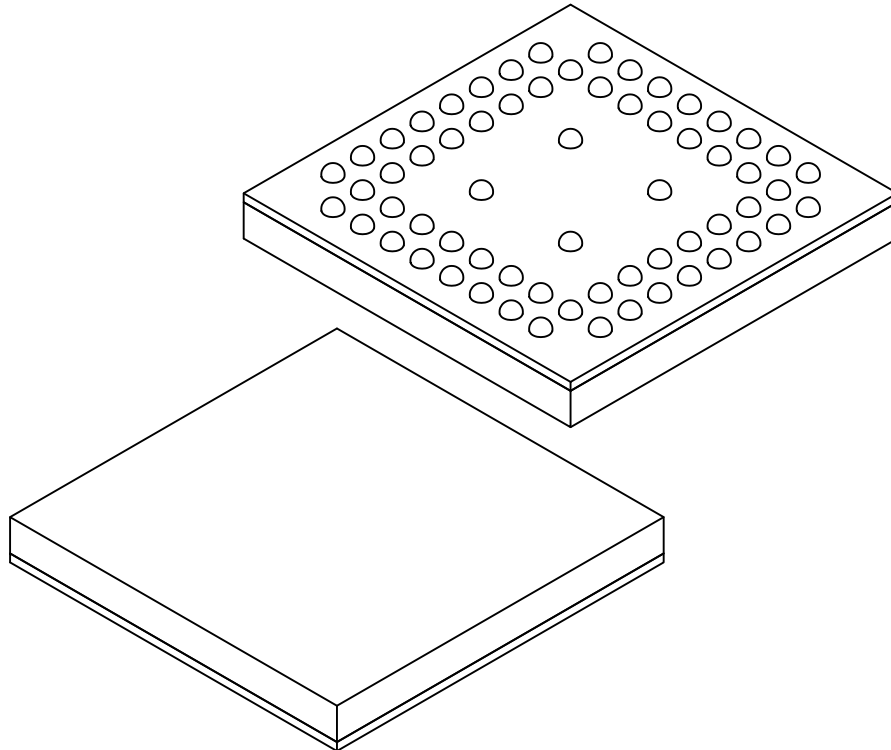


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	64		
Pitch	e	0.50 BSC		
Overall Height	A	–	–	0.92
Ball Height	A1	0.12	0.16	–
Mold Thickness	M	0.48	0.53	0.58
Overall Length	D	5.50 BSC		
Ball Array Length	D1	4.50 BSC		
Overall Width	E	5.50 BSC		
Ball Array Width	E1	4.50 BSC		
Ball Diameter	b	0.23	0.28	0.33

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

64-Ball Very Thin Fine-Pitch Ball Grid Array (2HW) - 5.5x5.5x0.92 mm Body [VFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

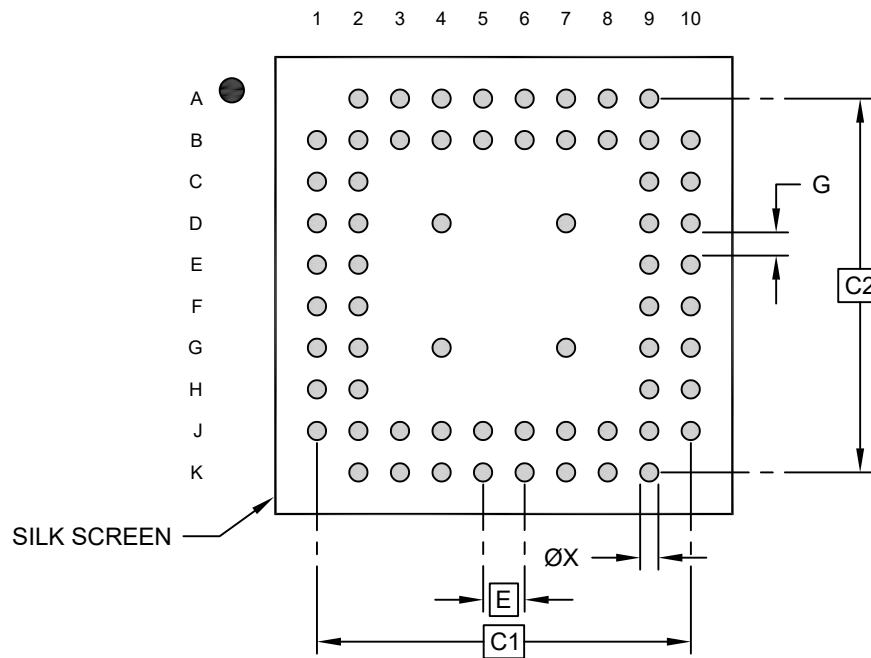

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Contact Pad Spacing	C1	4.50 BSC		
Contact Pad Spacing	C2	4.50 BSC		
Contact Pad Diameter (X64)	X1			0.22
Contact Pad to Contact Pad (Xnn)	G	0.28		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.