



82-Ball Very Very Thin Fine-Pitch Ball Grid Array (2MW) - 5.5x5.5x0.79 mm Body [WFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

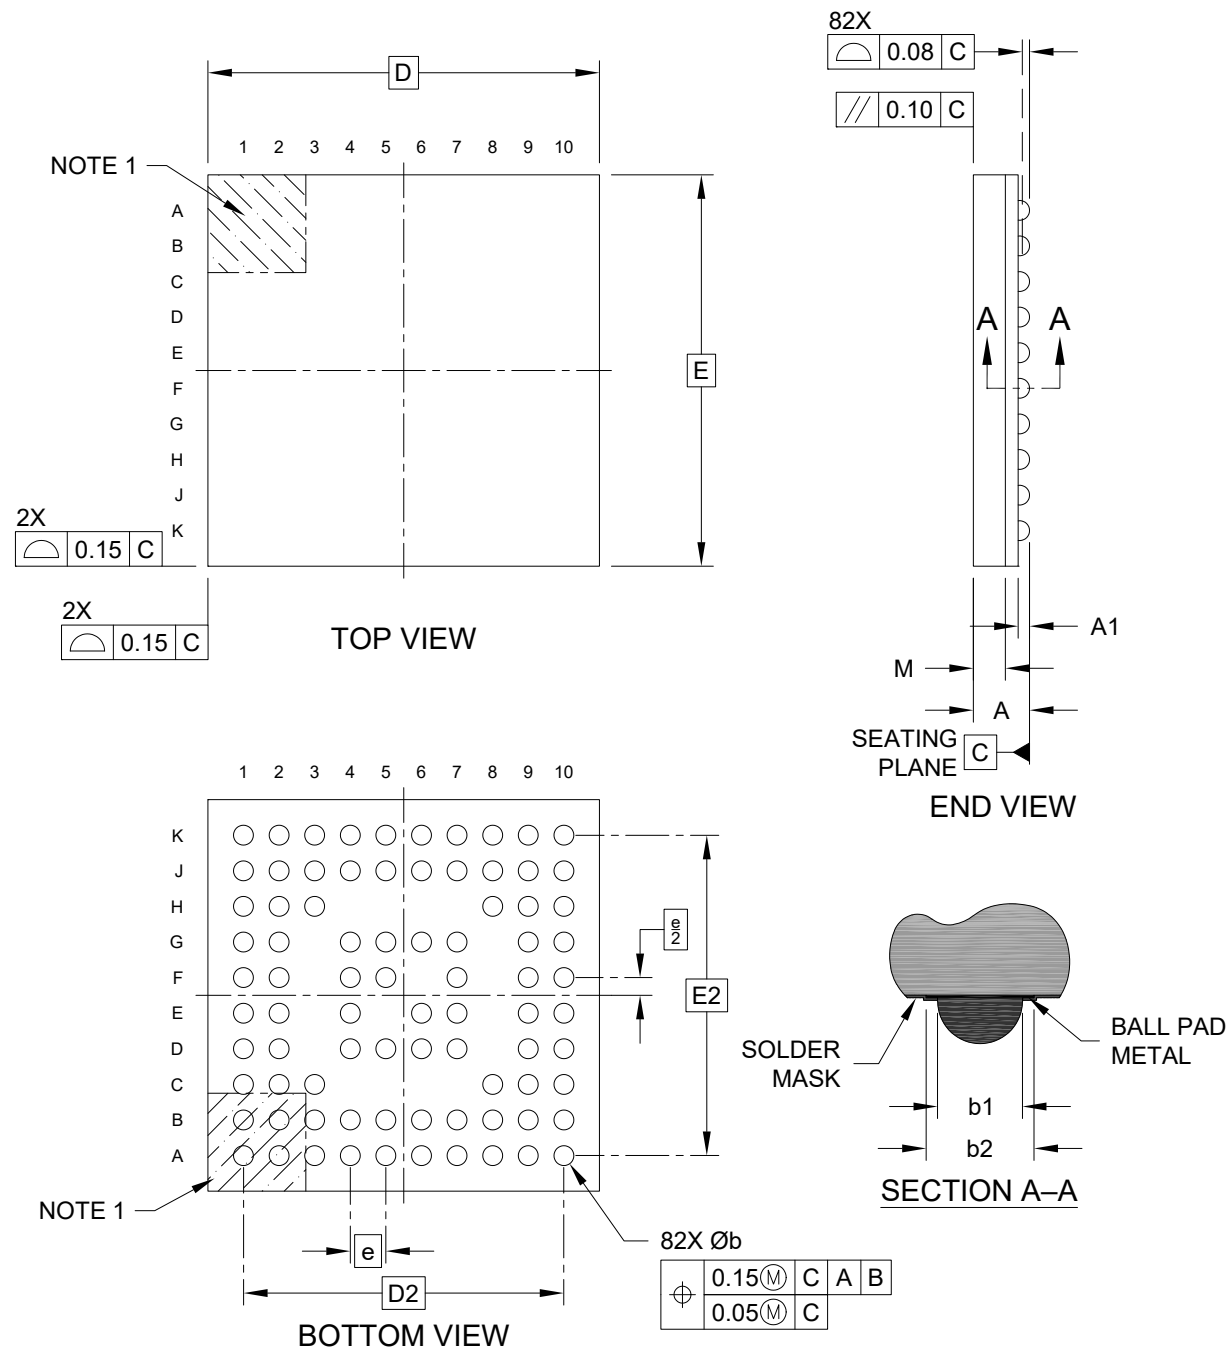

82-Ball Very Very Thin Fine-Pitch Ball Grid Array (2MW) - 5.5x5.5x0.79 mm Body [WFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

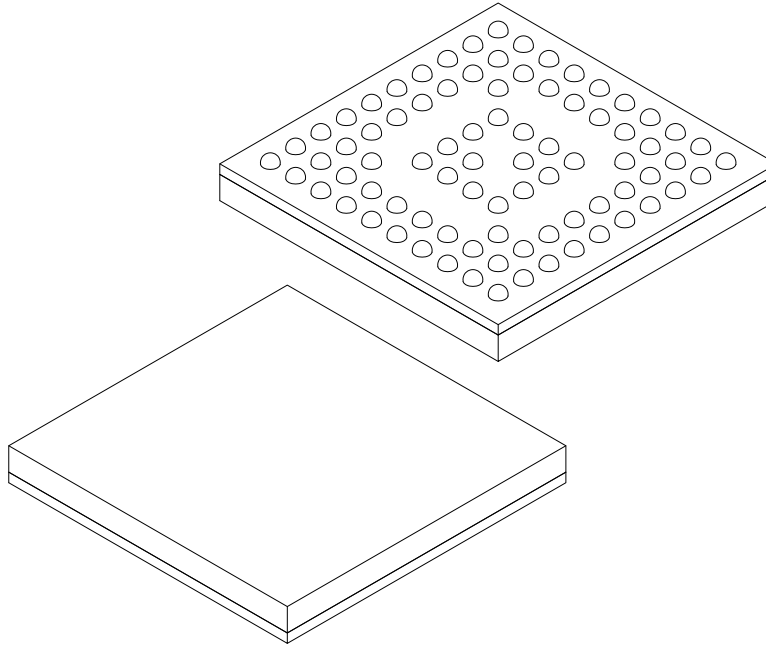


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		82		
Pitch	e		0.50 BSC		
Overall Height	A		–	–	0.79
Ball Height	A1		0.12	0.16	–
Mold Cap Thickness	M		0.35	0.40	0.45
Overall Length	D		5.50 BSC		
Ball Array Length	D2		4.50 BSC		
Overall Width	E		5.50 BSC		
Ball Array Width	E2		4.50 BSC		
Ball Diameter	b		0.23	0.28	0.33
Ball Pad Metal Diameter	b1		0.245	0.275	0.305
Solder Mask Opening Diameter	b2		0.325	0.355	0.385

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

82-Ball Very Very Thin Fine-Pitch Ball Grid Array (2MW) - 5.5x5.5x0.79 mm Body [WFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

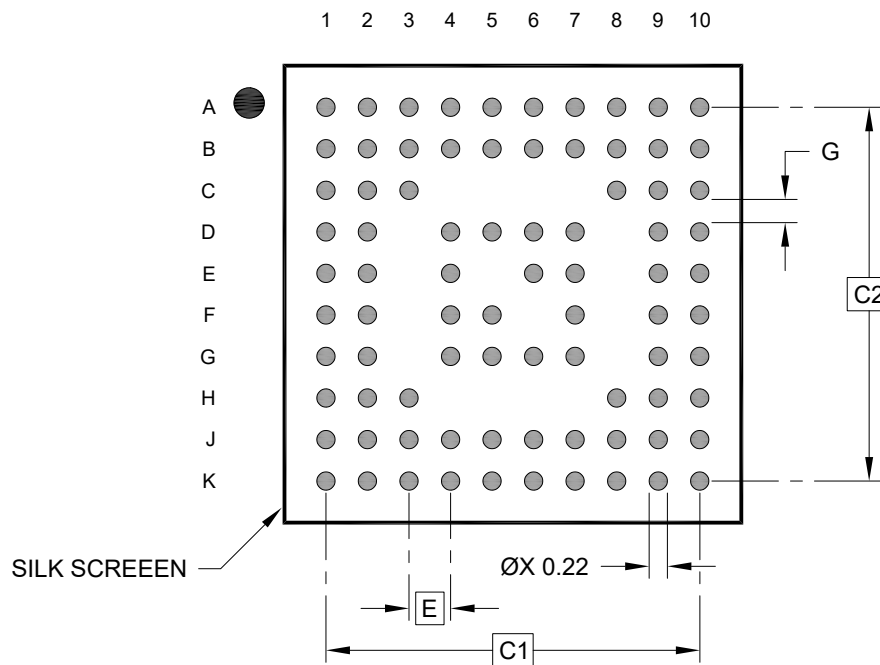

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Contact Pad Spacing	C1	4.50 BSC		
Contact Pad Spacing	C2	4.50 BSC		
Contact Pad Diameter (X82)	X			0.22
Contact Pad to Contact Pad (Xnn)	G	0.28		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.