


Packaging Diagrams and Parameters

14-Ball Wafer Level Chipscale Package (CS) - 1.57X2.36 Body [WLCSP] - PIC16LF1823


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

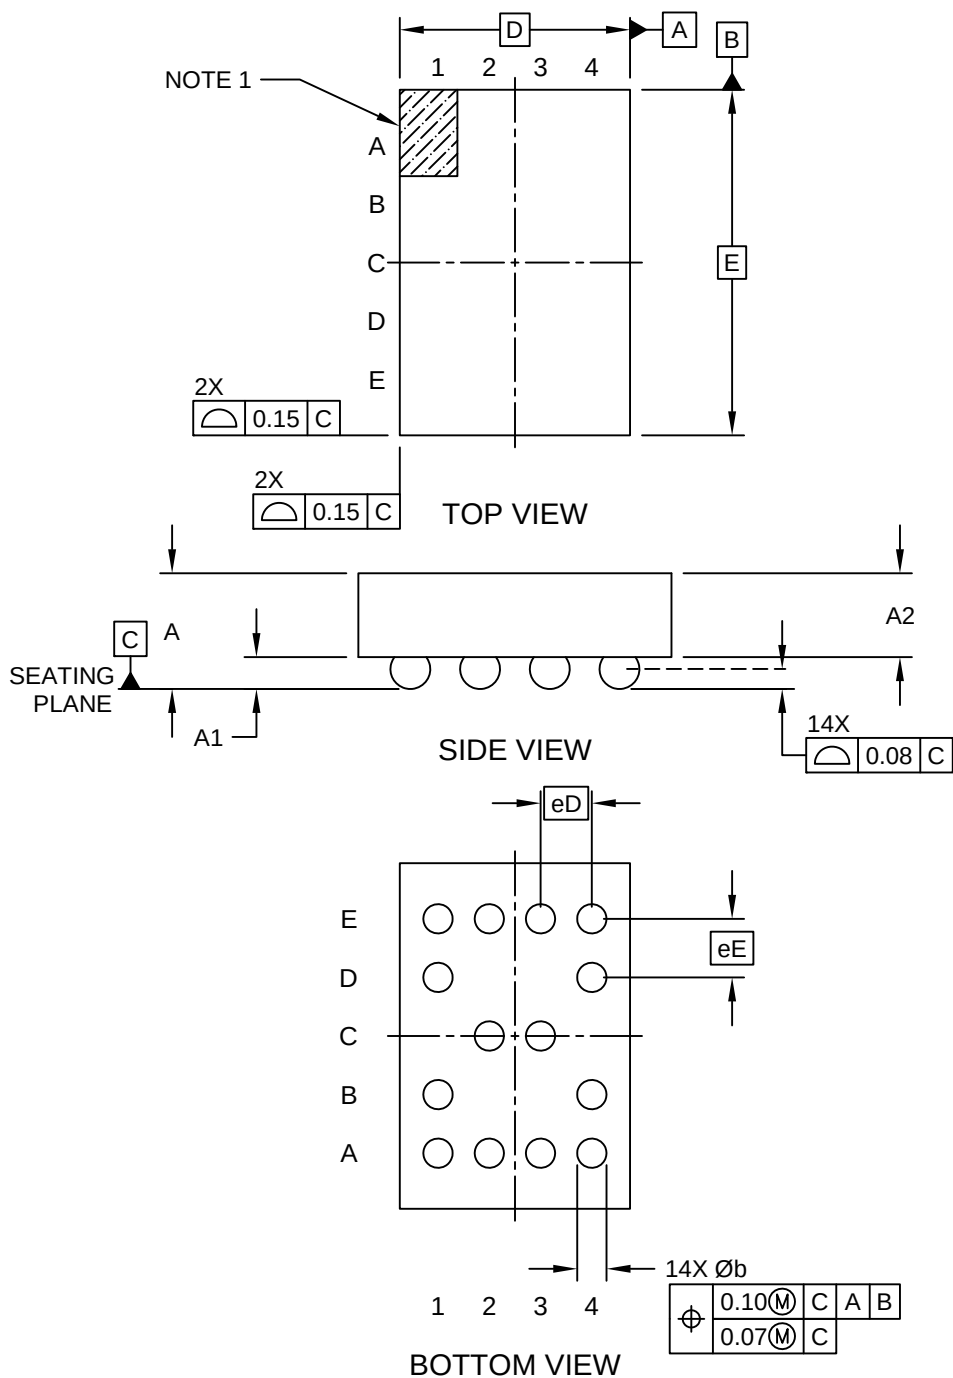

Packaging Diagrams and Parameters

14-Ball Wafer Level Chipscale Package (CS) - 1.57X2.36 Body [WLCSP] - PIC16LF1823

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

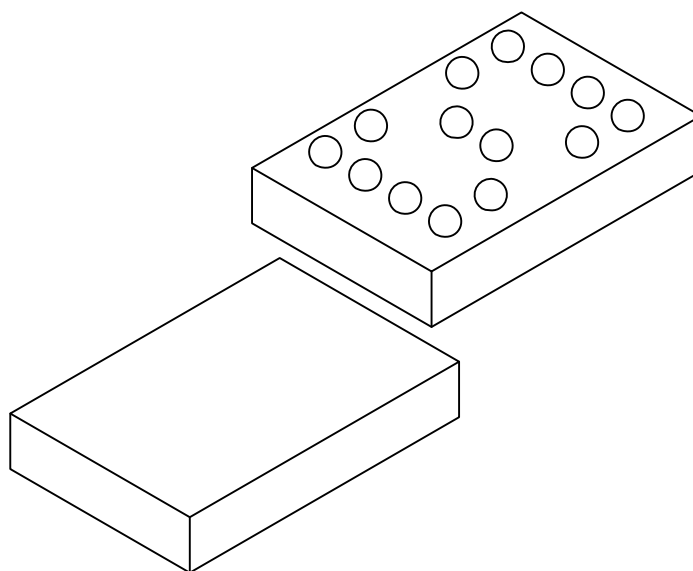

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	14		
Pitch	eD	0.35 BSC		
Pitch	eE	0.40 BSC		
Overall Height	A	0.55	0.59	0.62
Bump Height	A1	0.14	0.16	0.18
Die Height	A2	0.41	0.43	0.44
Overall Width	D	1.57 BSC		
Overall Length	E	2.36 BSC		
Terminal Width	b	0.24	0.25	0.26
Terminal Length	L	0.30	0.40	0.50
Terminal-to-Exposed-Pad	K	0.20	-	-

Notes:

1. Terminal A1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

Land Pattern

14-Ball Wafer Lever Chipscale Package (CS) - 1.57X2.36 Body [WLCSP] - PIC16LF1823

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

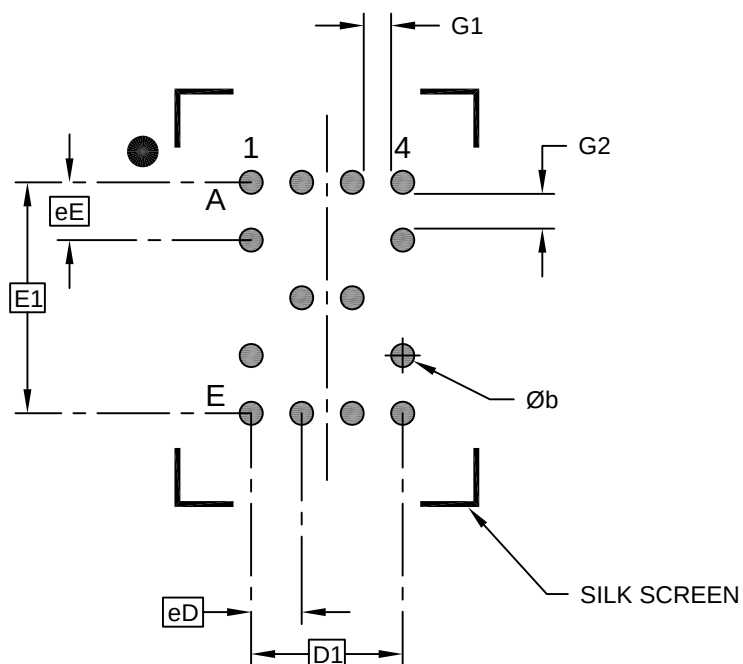

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	eD	0.35 BSC		
Contact Pitch	eE	0.40 BSC		
Overall Pitch	D1	1.05 BSC		
Overall Pitch	E1	1.60 BSC		
Contact Pad Diameter	b	0.15	0.16	0.17
Contact Pad Spacing	G1	0.23		
Contact Pad Spacing	G2	0.18		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-08009 Rev A