



144-Ball Low Profile Fine Pitch Ball Grid Array (HAX) - 10x10 mm Body [LFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

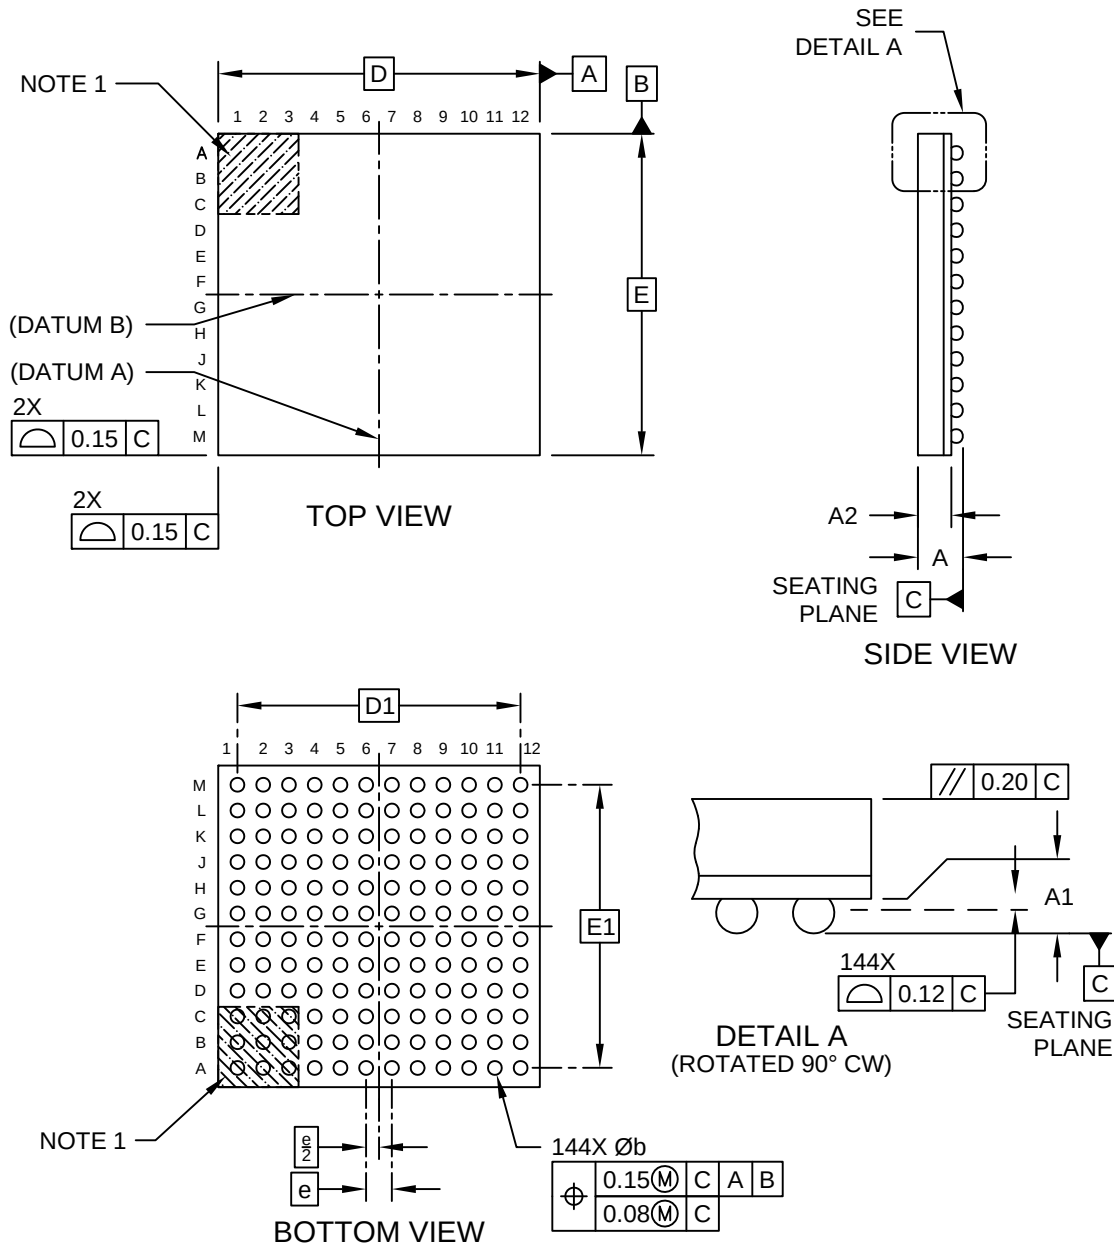

144-Ball Low Profile Fine Pitch Ball Grid Array (HAX) - 10x10 mm Body [LFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

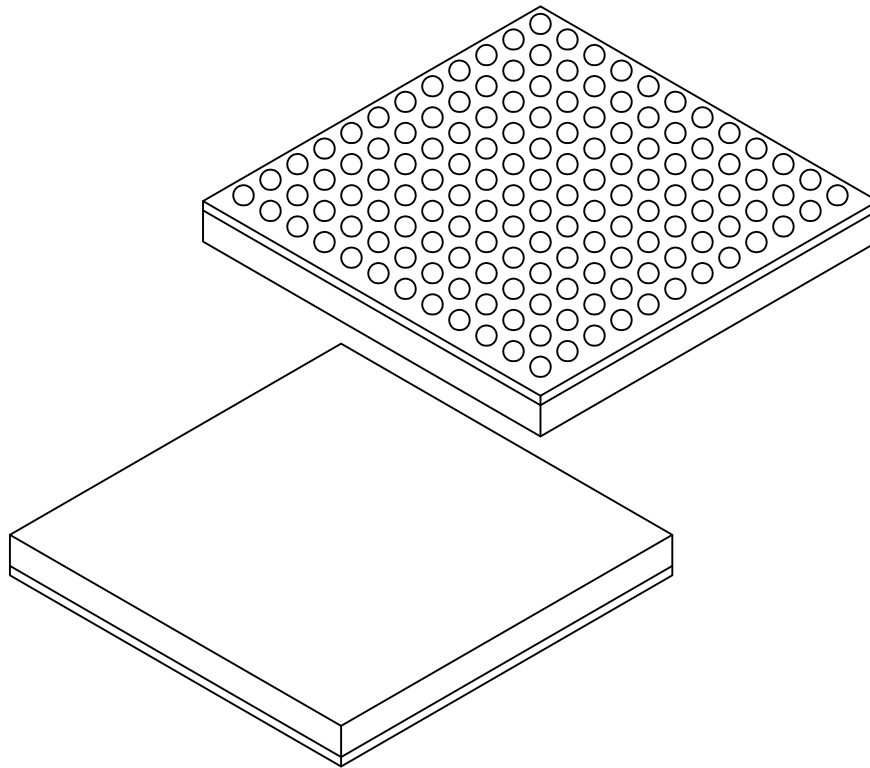


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	144		
Pitch	e	0.80 BSC		
Overall Height	A	-	1.28	1.40
Standoff	A1	0.25	0.32	0.37
Package Body Thickness	A2	0.65	0.96	1.04
Overall Length	D	10.00 BSC		
Overall Width	E	10.00 BSC		
Overall Pitch	D1	8.80 BSC		
Overall Pitch	E1	8.80 BSC		
Terminal Width	b	0.38	0.43	0.48

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

144-Ball Low Profile Fine Pitch Ball Grid Array (HAX) - 10x10 mm Body [LFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

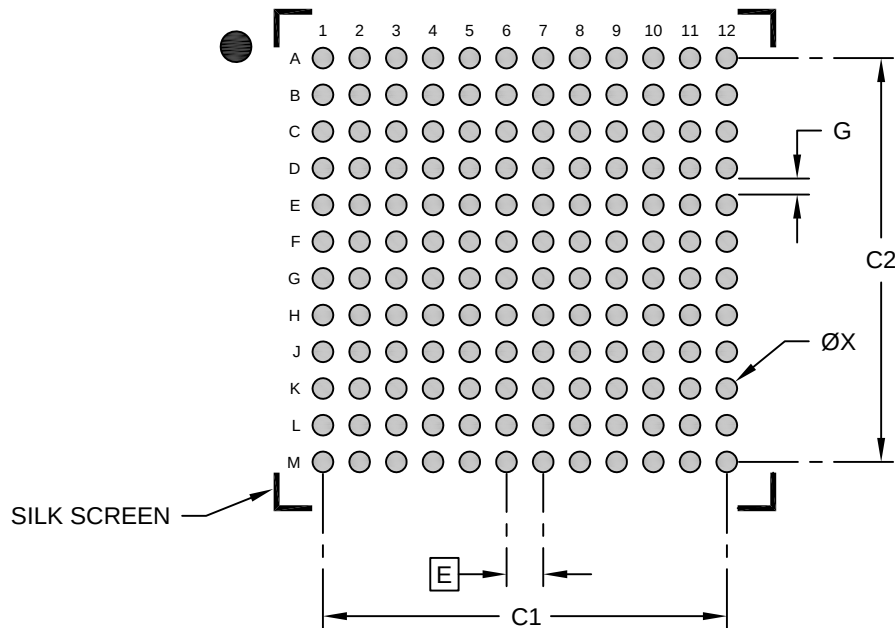

RECOMMENDED LAND PATTERN

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Contact Pitch	E	0.80 BSC		
Contact Pad Spacing	C1		8.80	
Contact Pad Spacing	C2		8.80	
Contact Pad Width (X144)	X			0.45
Contact Pad to Contact Pad (X121)	G	0.35		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.