


896-Terminal Ceramic Land Grid Array (DLB) - 31x31x4.03 mm Body [CLGA]


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

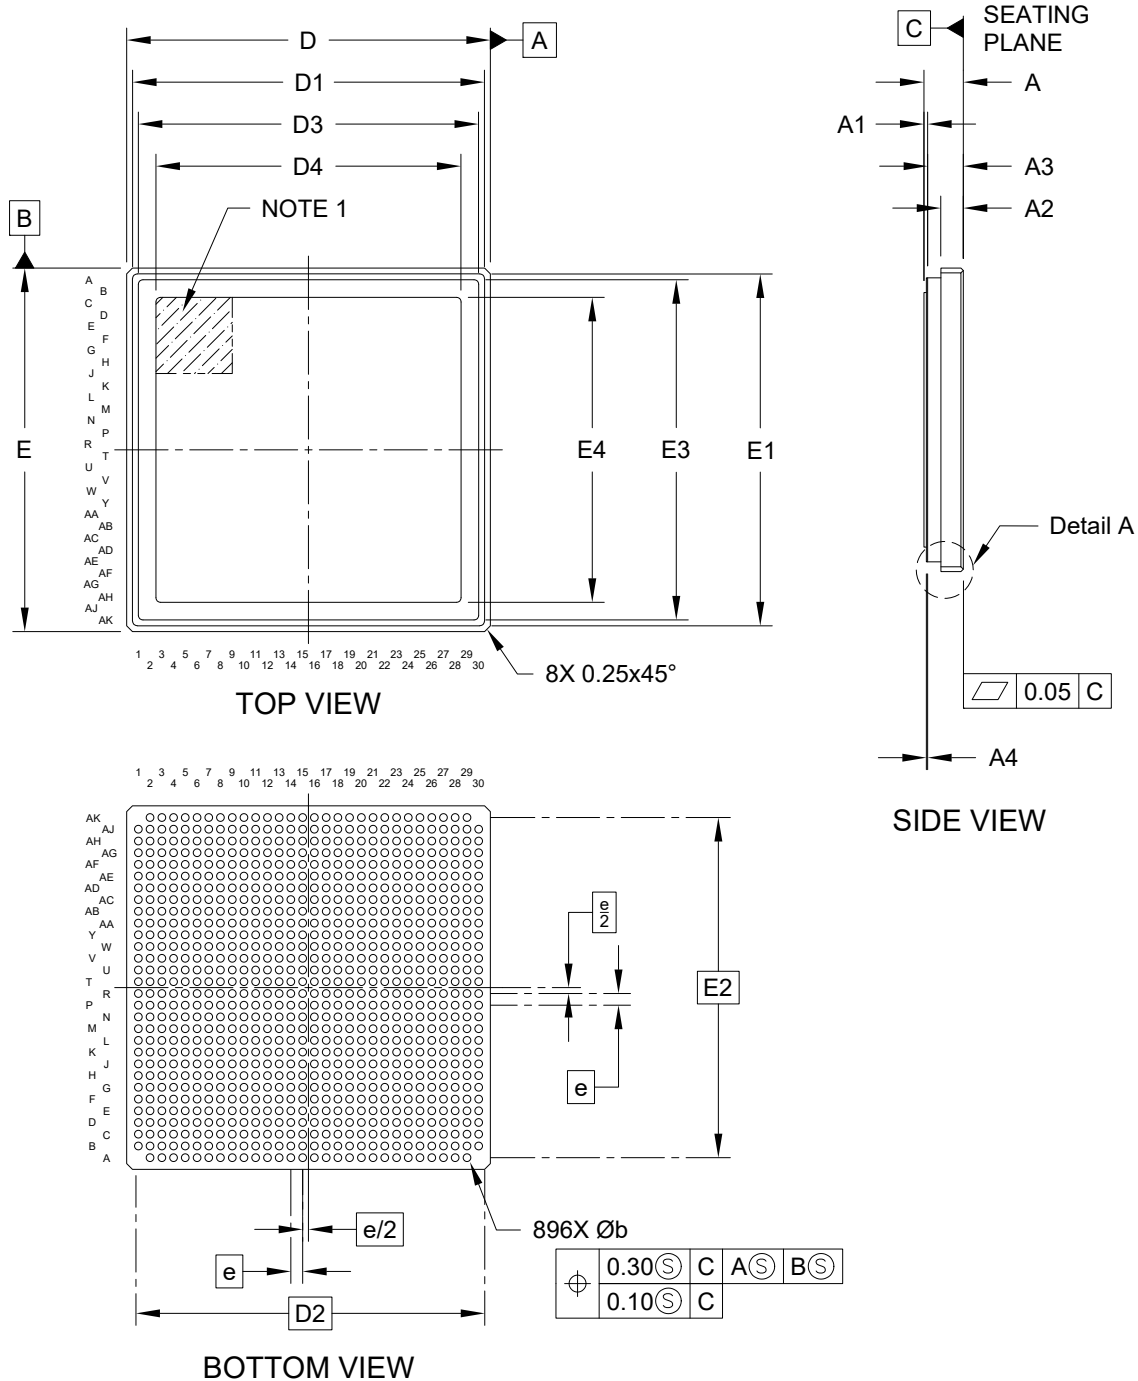

Microchip Technology Drawing C04-21468 Rev A Sheet 1 of 2

896-Terminal Ceramic Land Grid Array (DLB) - 31x31x4.03 mm Body [CLGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

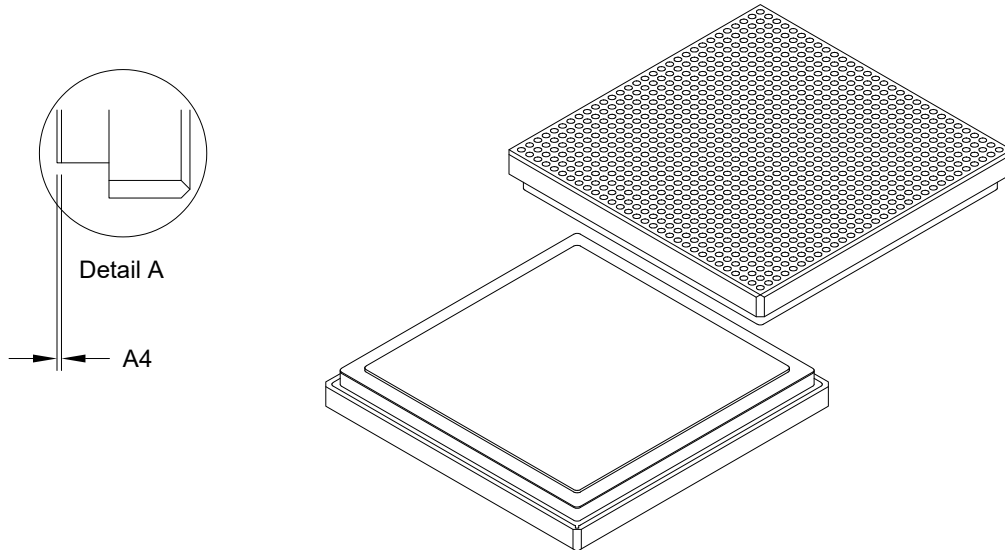


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N	896			
Pitch	e	1.0 BSC			
Overall Height	A	3.64	4.03	4.42	
Lid Height	A1	0.35	0.38	0.41	
Substrate Height	A2	2.07	2.30	2.53	
Package Height	A3	3.28	3.65	4.02	
Flange Height	A4	0.102	0.127	0.152	
Overall Length	D	30.85	31.00	31.15	
Substrate Length	D1	29.70	30.00	30.30	
Terminal Array Length	D2	29.00 BSC			
Lid Ring Width	D3	28.87	29.00	29.13	
Lid Width	D4	25.92	26.00	26.08	
Overall Width	E	30.85	31.00	31.15	
Substrate Width	E1	29.70	30.00	30.30	
Terminal Array Width	E2	29.00 BSC			
Lid Ring Width	E3	28.87	29.00	29.13	
Lid Width	E4	25.92	26.00	26.08	
Terminal Diameter	b	0.63	0.68	0.73	

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.

896-Terminal Ceramic Land Grid Array (DLB) - 31x31x4.03 mm Body [CLGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

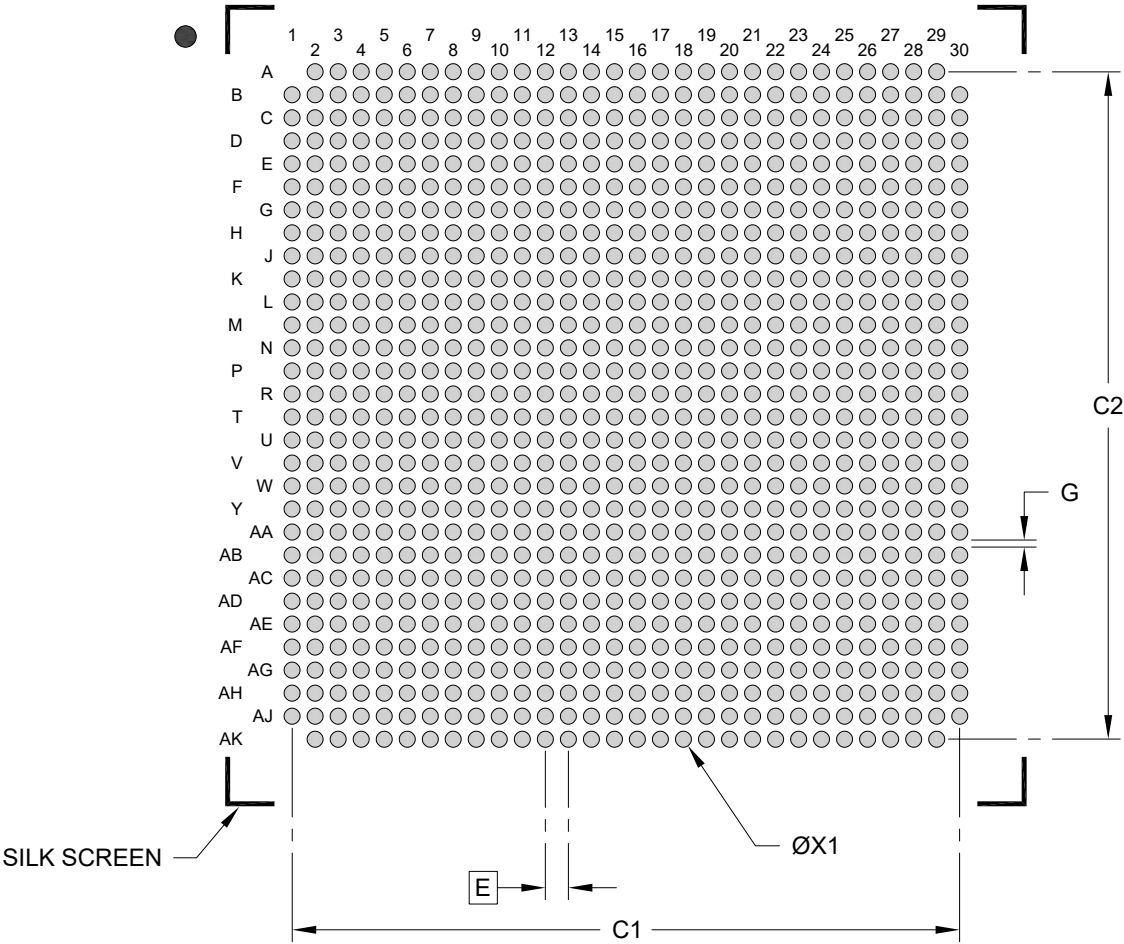

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	1.00 BSC		
Contact Pad Spacing	C1		29.00	
Contact Pad Spacing	C2		29.00	
Contact Pad Diameter (X896)	X1			0.70
Contact Pad to Contact Pad	G1	0.30		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.