



243-Ball Thin Fine-Pitch Ball Grid Array (4TB) - 16x16x1.23 mm Body [TFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

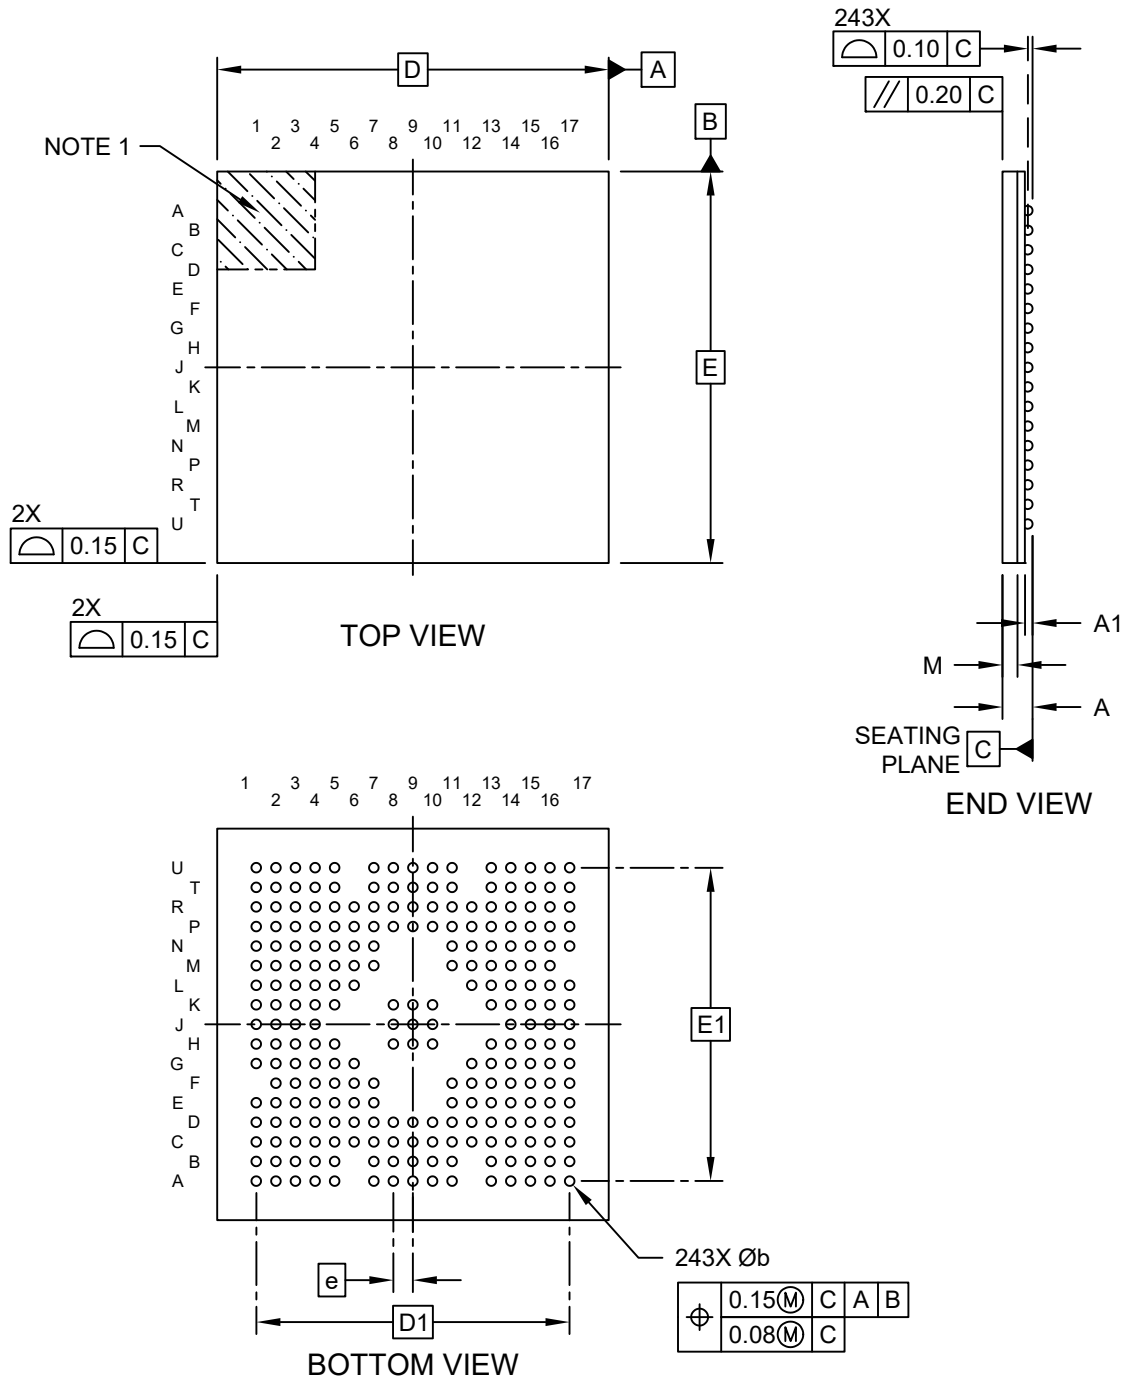

243-Ball Thin Fine-Pitch Ball Grid Array (4TB) - 16x16x1.23 mm Body [TFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

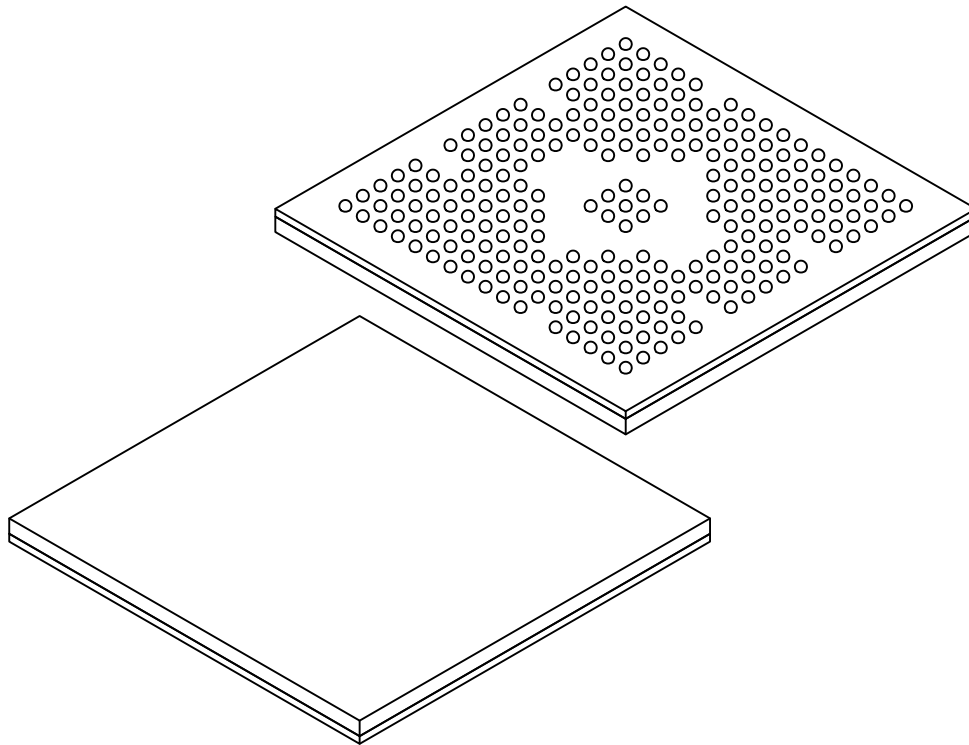


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	243		
Pitch	e	0.80 BSC		
Overall Height	A	–	–	1.23
Ball Height	A1	–	0.21	0.312
Mold Thickness	M	0.51	0.56	0.61
Overall Length	D	16.00 BSC		
Ball Array Length	D2	12.80 BSC		
Overall Width	E	16.00 BSC		
Ball Array Width	E2	12.80 BSC		
Ball Diameter	b	0.35	0.40	0.45

Notes:

1. Terminal A1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

243-Ball Thin Fine-Pitch Ball Grid Array (4TB) - 16x16x1.23 mm Body [TFBGA]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

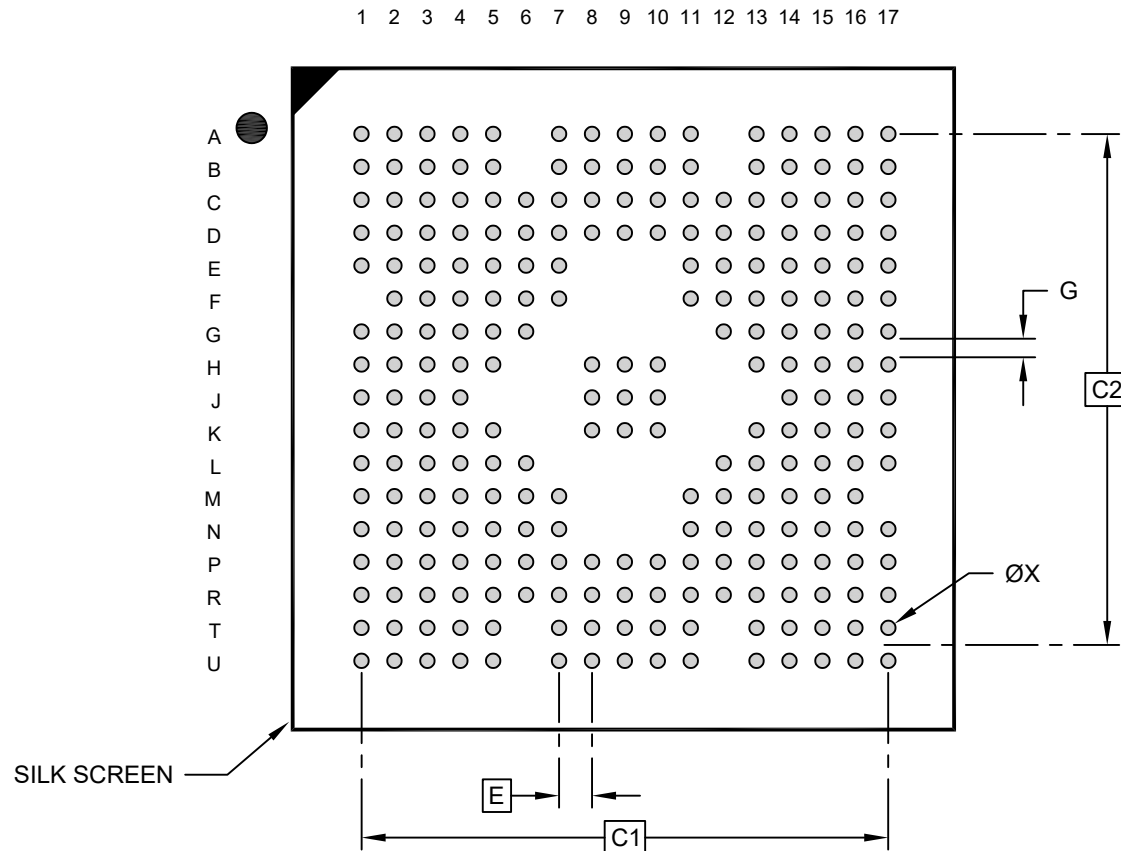

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.80 BSC		
Contact Pad Spacing	C1	12.80 BSC		
Contact Pad Spacing	C2	12.80 BSC		
Contact Pad Width (X243)	X			0.35
Contact Pad to Contact Pad	G	0.45		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.