



# 1069-Ball Fine-Pitch Ball Grid Array (6GC) - 27x27x2.28 mm Body [FBGA] Microsemi Legacy Flipchip Package

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

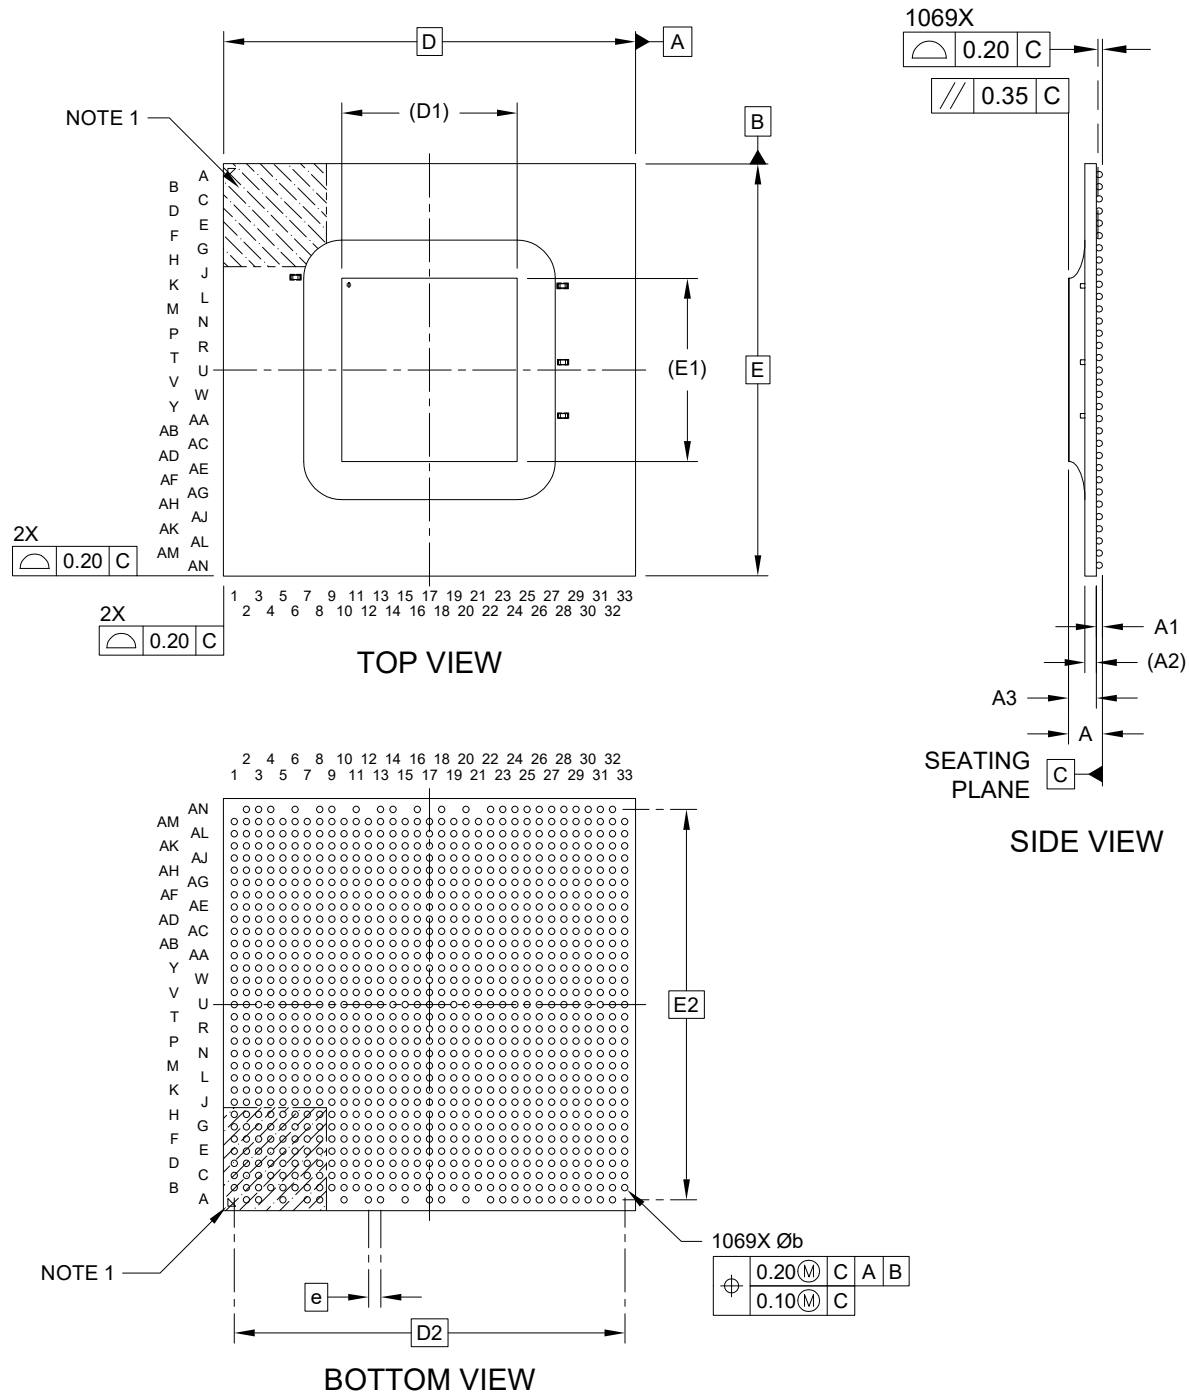

# 1069-Ball Fine-Pitch Flipchip Ball Grid Array (6GC) - 27x27x2.28 mm Body [FBGA] Microsemi Legacy Package 1069\_FCBGA

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

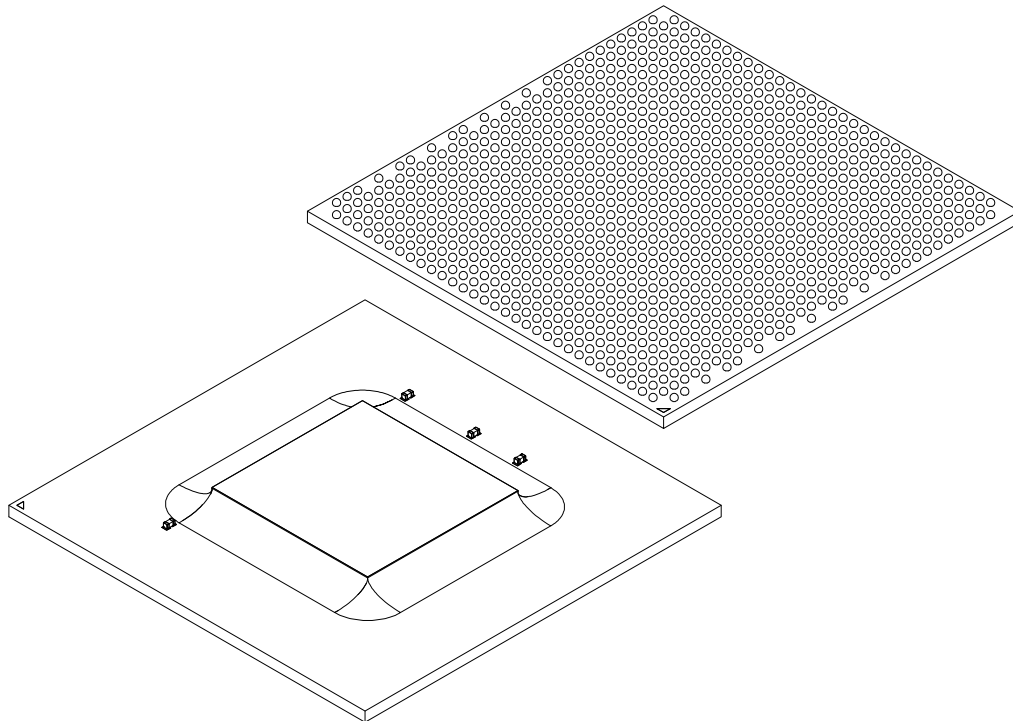


| Units               |    | MILLIMETERS |      |      |
|---------------------|----|-------------|------|------|
| Dimension Limits    |    | MIN         | NOM  | MAX  |
| Number of Terminals | N  | 1.69        |      |      |
| Pitch               | e  | 0.80 BSC    |      |      |
| Overall Height      | A  | 1.75        | 2.02 | 2.28 |
| Ball Height         | A1 | 0.35        | 0.40 | 0.45 |
| Substrate Thickness | A2 | 0.75 REF    |      |      |
| Package Thickness   | A3 | 1.40        | 1.62 | 1.83 |
| Overall Length      | D  | 27.00 BSC   |      |      |
| Chip Length         | D1 | 11.50 REF   |      |      |
| Ball Array Length   | D2 | 25.60 BSC   |      |      |
| Overall Width       | E  | 27.00 BSC   |      |      |
| Chip Width          | E1 | 12.00 REF   |      |      |
| Ball Array Width    | E2 | 25.60 BSC   |      |      |
| Ball Diameter       | b  | 0.45        | 0.50 | 0.55 |

## Notes:

- Terminal A1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.  
REF: Reference Dimension, usually without tolerance, for information purposes only.

# 1069-Ball Fine-Pitch Ball Grid Array (6GC) - 27x27x2.28 mm Body [FBGA] Microsemi Legacy Flipchip Package

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

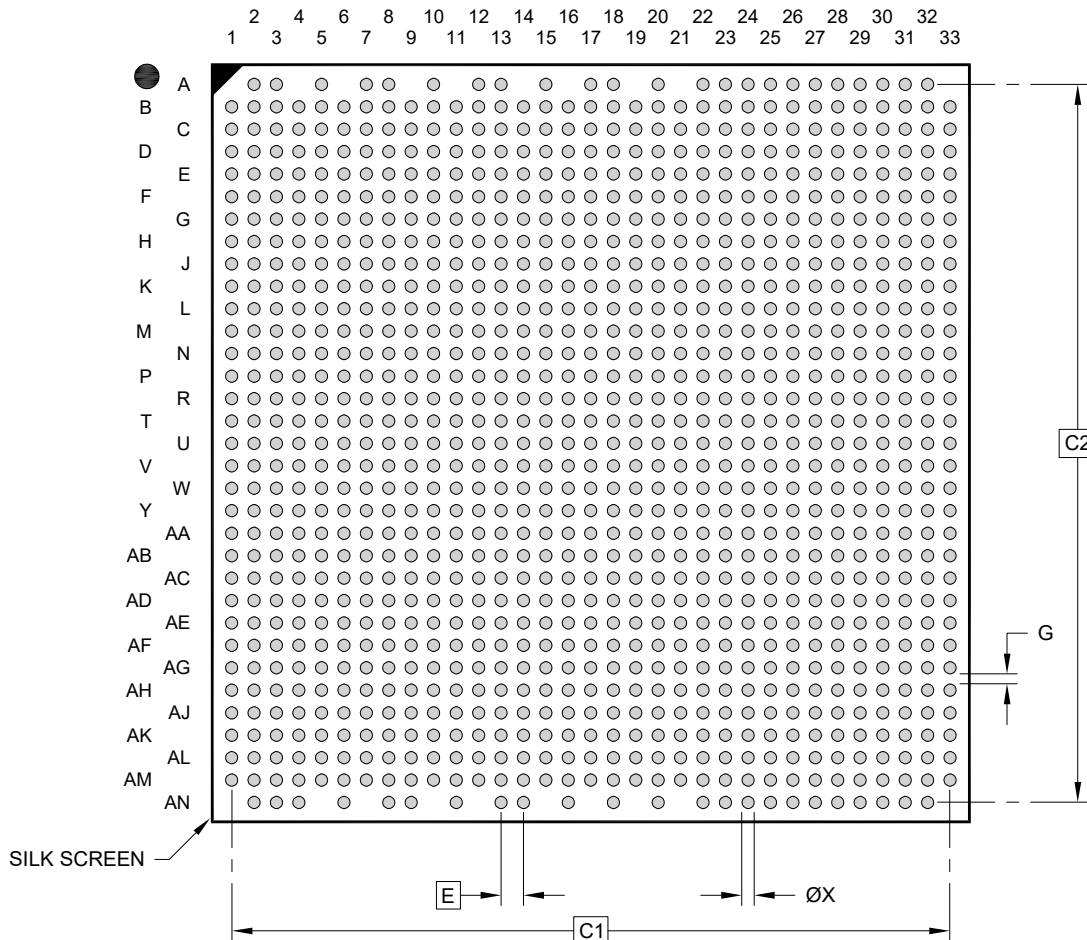

## RECOMMENDED LAND PATTERN

| Units                            |    | MILLIMETERS |     |      |
|----------------------------------|----|-------------|-----|------|
| Dimension Limits                 |    | MIN         | NOM | MAX  |
| Contact Pitch                    | E  | 0.80 BSC    |     |      |
| Contact Pad Spacing              | C1 | 25.60 BSC   |     |      |
| Contact Pad Spacing              | C2 | 25.60 BSC   |     |      |
| Contact Pad Width (Xnn)          | X  |             |     | 0.45 |
| Contact Pad to Contact Pad (Xnn) | G  | 0.35        |     |      |

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-27064 Rev A