
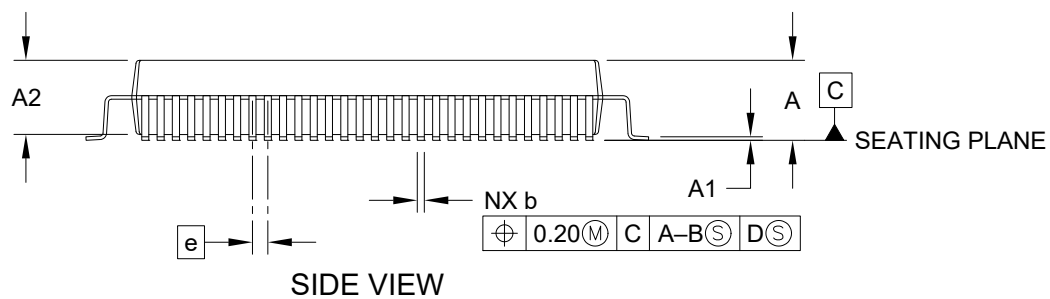



**100-Lead Metric Quad Flat Pack (KGC) - 14x20x2.72 mm Body [MQFP]
With 3.90 mm Footprint; Microsemi Legacy Package**

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

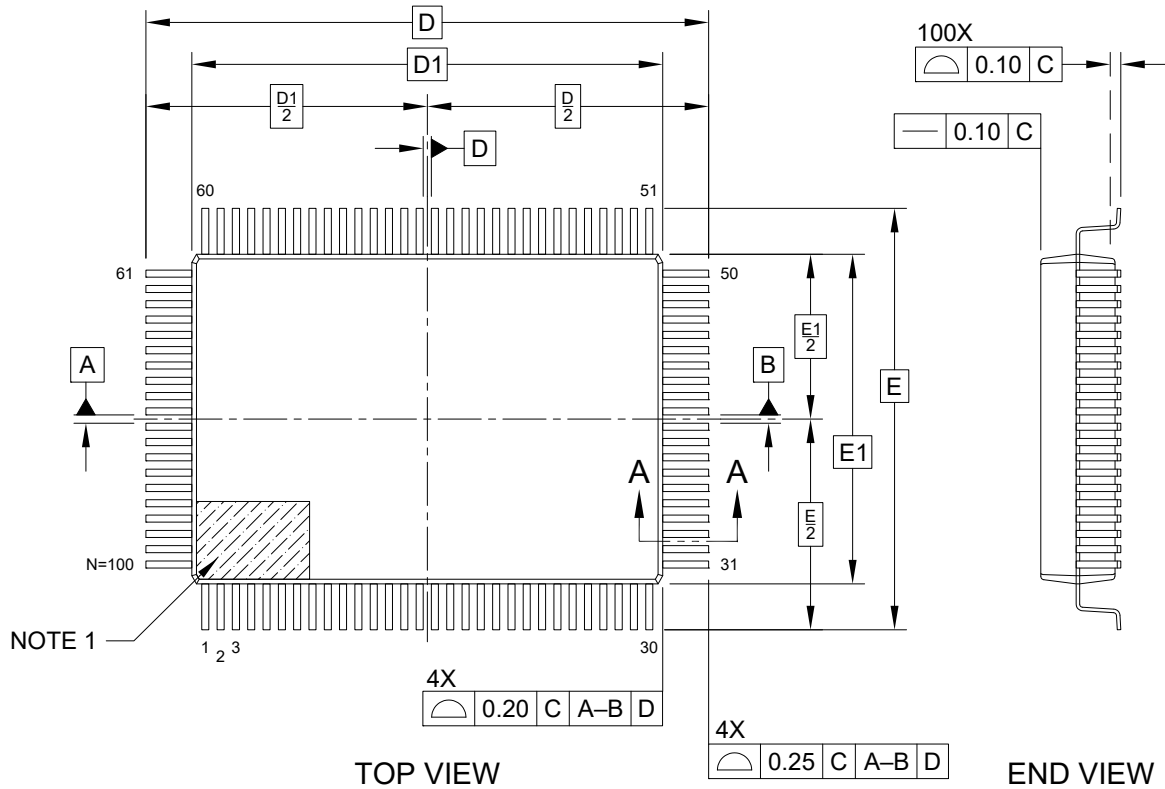

100-Lead Metric Quad Flat Pack (KGC) - 14x20x2.72 mm Body [MQFP] With 3.90 mm Footprint; Microsemi Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

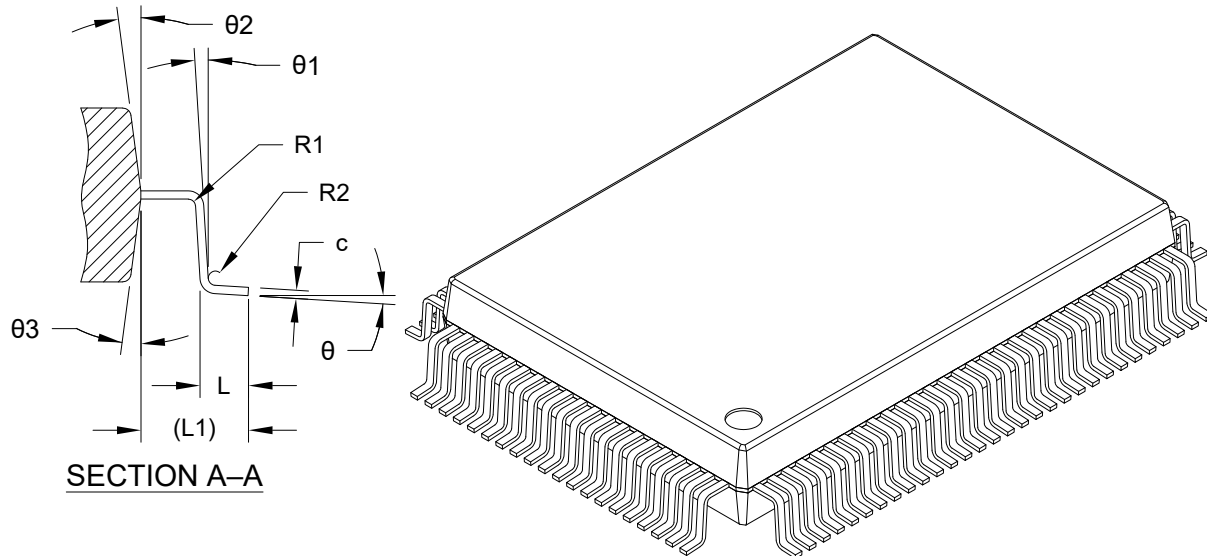


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		100		
Pitch	e		0.65 BSC		
Overall Height	A		-	-	3.40
Standoff	A1		0.25	-	-
Molded Package Thickness	A2		2.55	2.72	3.05
Overall Length	D		23.90 BSC		
Molded Package Length	D1		20.00 BSC		
Overall Width	E		17.90 BSC		
Molded Package Width	E1		14.00 BSC		
Terminal Width	b		0.22	0.30	0.38
Terminal Thickness	c		0.11	0.15	0.23
Terminal Length	L		0.73	0.88	1.03
Footprint	L1		1.95 REF		
Lead Bend Radius	R1		0.13	-	-
Lead Bend Radius	R2		0.13	-	0.30
Foot Angle	θ		0°	3.5°	7°
Lead Angle	θ1		0°	-	-
Terminal-to-Exposed-Pad	θ2		15° REF		
Terminal-to-Exposed-Pad	θ3		15° REF		

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

100-Lead Metric Quad Flat Pack (KGC) - 14x20x2.72 mm Body [MQFP] With 3.90 mm Footprint; Microsemi Legacy Package

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

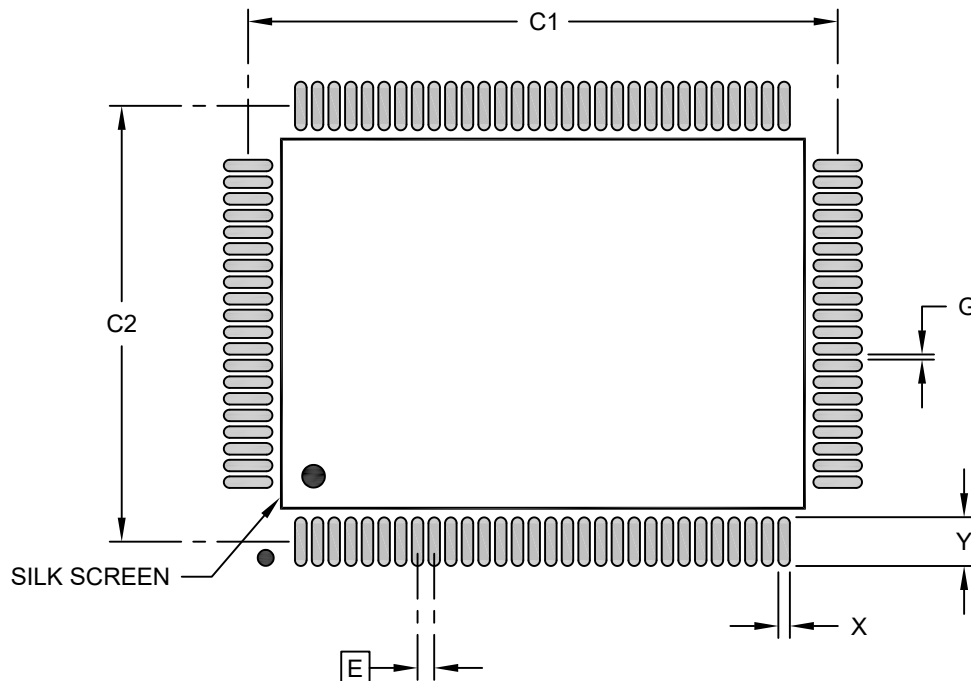

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.65 BSC		
Contact Pad Spacing	C1		23.00	
Contact Pad Spacing	C2		17.00	
Contact Pad Width (X100)	X			0.45
Contact Pad Length (X100)	Y			1.90
Contact Pad to Contact Pad (X96)	G	0.20		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-27364 Rev A